



PRODUCT CATALOG
Volume #26

RETROFITS

MUR

MULTI-USE RETROFIT	4
590 NM AMBER MULTI-USE RETROFIT	5

DOWNLIGHTS

LED DISK SERIES	7
SLIM DOWNLIGHT (WAFER)	7
OPTUS COMMERCIAL CAN	7

INDOOR FIXTURES

LINEAR

810 DECORATIVE WRAP	9
SELECTABLE VAPOR TIGHT	9

TROFFERS

830 SELECTABLE TROFFERS	9
-----------------------------------	---

PANELS

620 INTELLISENSE™ PANEL	10
-----------------------------------	----

HIGH BAYS

LINEAR HIGH BAY	10
HALOFLEX ROUND HIGH BAY	11

OUTDOOR FIXTURES

AREA LIGHTS

AREA LIGHT	13
----------------------	----

FLOODS

FLOOD LIGHT	14
-----------------------	----

CANOPY

CANOPY ROUND & SQUARE	14
---------------------------------	----

WALL PACKS

MINI WALL PACK	15
WALL PACK	15
FULL CUTOFF WALL PACK	15

HAZARDOUS LIGHTING

CLASS 1 DIVISION 1 HAZARDOUS SERIES	16
CLASS 1 DIVISION 2 HAZARDOUS SERIES	17

SPORTS LIGHTING

SPORT LIGHT	18
-----------------------	----

EMERGENCY

EMG DRIVERS

EMERGENCY DRIVERS	21
EMERGENCY HOTSPOT	22

CONTROLS

CONTROLS


STAND-ALONE CONTROLS	25
--------------------------------	----



RETROFITS


MULTI-USE RETROFIT

ESL Vision's most versatile retrofit is the MUR (Multi-Use Retrofit). With multiple mounting options this can be used to retrofit a number of existing fixtures. Optional surge protection and occupancy sensors are available.

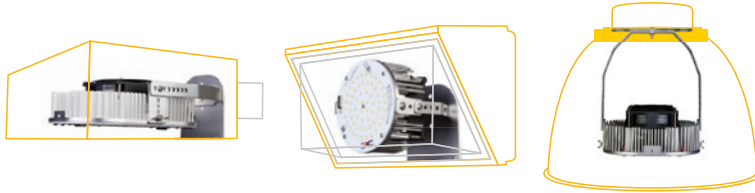


ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-MUR-45W-3xx	45W	(30) 3000K	5,778	128	120–277 VAC	8
ESL-MUR-45W-3xx-HV		(40) 4000K (50) 5000K	5,615	124	277–480 VAC	8
ESL-MUR-75W-3xx	75W	(30) 3000K	10,008	133	120–277 VAC	6
ESL-MUR-75W-3xx-HV		(40) 4000K (50) 5000K	9,949	133	277–480 VAC	6
ESL-MUR-105W-3xx	105W	(30) 3000K	13,901	132	120–277 VAC	6
ESL-MUR-105W-3xx-HV		(40) 4000K (50) 5000K	13,434	128	277–480 VAC	6
ESL-MUR-120W-3xx	120W	(30) 3000K	15,500	129	120–277 VAC	6
ESL-MUR-120W-3xx-HV		(40) 4000K (50) 5000K	15,138	126	277–480 VAC	6
ESL-MUR-150W-3xx	150W	(30) 3000K	20,520	137	120–277 VAC	6
ESL-MUR-150W-3xx-HV		(40) 4000K (50) 5000K	20,174	134	277–480 VAC	6
ESL-MUR-200W-3xx	200W	(30) 3000K	25,837	129	120–277 VAC	6
ESL-MUR-200W-3xx-HV		(40) 4000K (50) 5000K	25,475	127	277–480 VAC	6
ESL-MUR-280W-3xx	280W	(30) 3000K	40,004	143	120–277 VAC	4
ESL-MUR-280W-3xx-HV		(40) 4000K (50) 5000K	41,062	147	277–480 VAC	4
ESL-MUR-350W-3xx	350W	(30) 3000K	47,030	123	120–277 VAC	4
ESL-MUR-350W-3xx-HV		(40) 4000K (50) 5000K	49,194	123	277–480 VAC	4

* 5000K Lumen and Efficacy data listed. See specification sheet for other kelvin information.

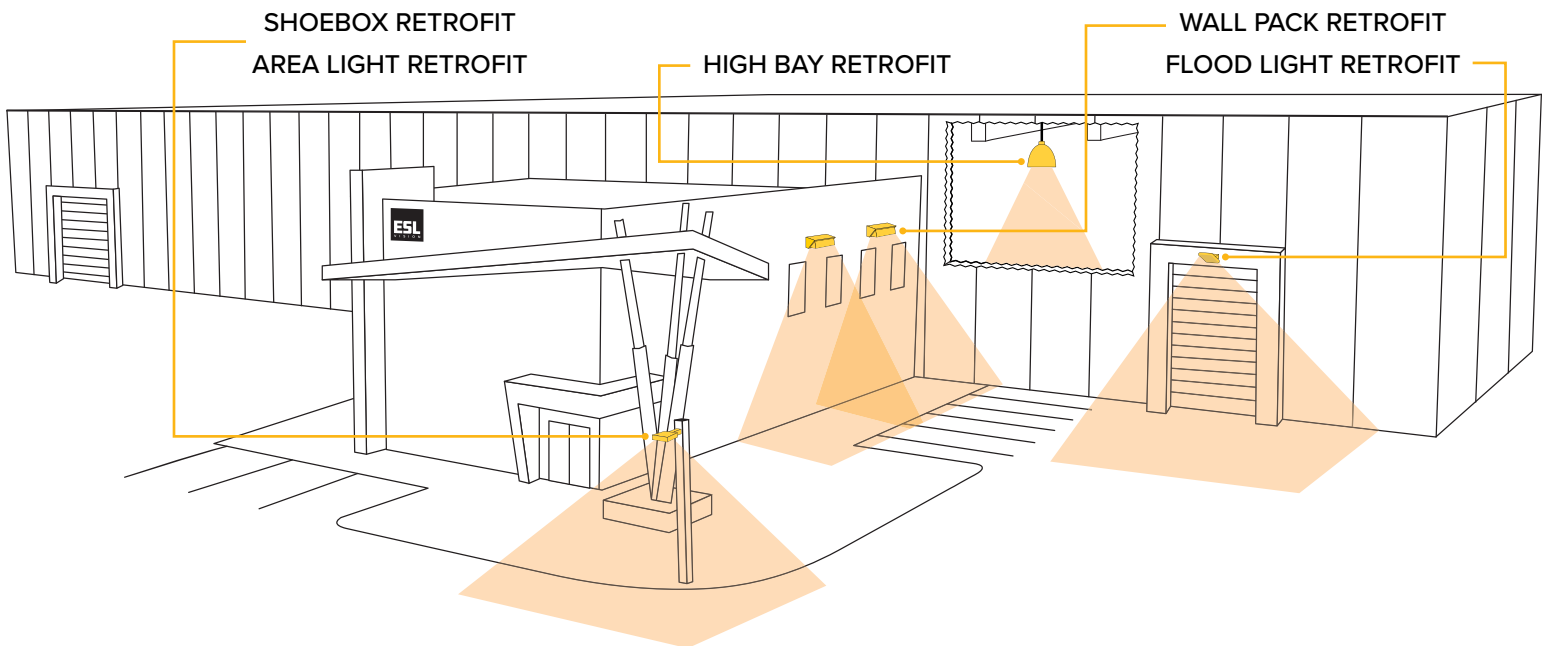

590 NM AMBER MULTI-USE RETROFIT

Reduce light pollution and adverse effects on wildlife with our 590NM MUR that emits no visible white light. Perfect retrofit for sensitive Dark Sky applications.



ITEM#	WATTAGE	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-MUR-45W-3-590NM	45W	3,473	90	120-277 VAC	8
ESL-MUR-45W-3-590NM-HV				277-480 VAC	8
ESL-MUR-75W-3-590NM	75W	6,014	90	120-277 VAC	6
ESL-MUR-75W-3-590NM-HV				277-480 VAC	6
ESL-MUR-105W-3-590NM	105W	8,600	90	120-277 VAC	6
ESL-MUR-105W-3-590NM-HV				277-480 VAC	6
ESL-MUR-120W-3-590NM	120W	9,720	90	120-277 VAC	6
ESL-MUR-120W-3-590NM-HV				277-480 VAC	6
ESL-MUR-150W-3-590NM	150W	12,150	90	120-277 VAC	6
ESL-MUR-150W-3-590NM-HV				277-480 VAC	6
ESL-MUR-200W-3-590NM	200W	16,000	90	120-277 VAC	6
ESL-MUR-200W-3-590NM-HV				277-480 VAC	6

FIELD INSTALLED ACCESSORIES FOR MUR AND AMBER MUR


ESL-SPD-300V-10KV-1	Hard-wired surge protector; (100-300 VAC) maximum discharge current: 10kA
ESL-SPD-480V-10KV-1	Hard-wired surge protector; (480 VAC) maximum discharge current: 10kA

Check This Out!

SELECTABLE VAPOR TIGHT

A VAPOR TIGHT THAT'S EASY TO INSTALL? YEP!

Get ready for the most versatile and easy to install Vapor Tight yet! Available in 3 sizes, they are all kelvin and wattage selectable and feature durable, tamper-resistant stainless steel hardware.

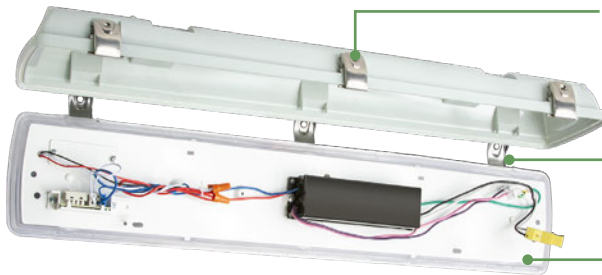

CONSTRUCTION

- Fully gasketed, polycarbonate housing
- Stainless steel latches and mounting hardware

INSTALLATION

- Hinged assembly for single-person installation and easy maintenance

OPTICS

- UV stabilized, high impact translucent lens for maximum light output
- Integrated lens and LED module board





DOWNLIGHTS

LED DISK SERIES

The latest LED Disk Series is 5 CCT field selectable, 120V Triac dimmable, and is compatible with Single Gang, 3/0, & 4/0 J-Boxes. Closet Rated to Mount in Clothes Closets.



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY
6" DSK ESL-DSK-6-13W-52750	13W	2700K-3000K-3500K-4000K-5000K	1,100	85	120 VAC	12	540

SLIM DOWNLIGHT (WAFER)

The latest Wafer Series is 5 CCT field selectable, 120V Triac dimmable and has an expanded offering of sizes and trim kits, sure to suit any interior.

Field Installable Trim Kits: Black, Bronze, Copper & Brushed Nickel



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY
3" ROUND ESL-WFR-R3-6W-32750-WH	6W	2700K-3000K-3500K-4000K-5000K	442	74	120 VAC	18	1,350
4" ROUND ESL-WFR-R4-9W-32750-WH	9W	2700K-3000K-3500K-4000K-5000K	637	71	120 VAC	12	768
6" ROUND ESL-WFR-R6-12W-32750-WH	12W	2700K-3000K-3500K-4000K-5000K	1,026	86	120 VAC	12	540

FIELD INSTALLED ACCESSORIES

ESL-WFR3-3-Tff	3-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-4-Tff	4-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-6-Tff	6-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-EXT-10FT	10-foot long extension wire
ESL-WFR3-EXT-20FT	20-foot long extension wire

OPTUS COMMERCIAL CAN

ESL Vision's Optus Series of fixtures are both kelvin and wattage selectable, offering the utmost in versatility. The three sizes each feature 5 lumen levels and 5 kelvin settings. The 24" flexible MC whip with cable snap connector makes installation fast and easy.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY
ESL-OPT-6-0520W-33065K	5W-9W-12W-16W-20W		2,000			4	360
ESL-OPT-8-1635W-33065K	16W-22W-26W-30W-35W	3000K-3500K-4000K-5000K-6000K	3,300	100	120-277 VAC	4	160
ESL-OPT-10-1840W-33065K	18W-23W-28W-35W-40W		3,500			4	120

FACTORY INSTALLED OPTIONS

-EM	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 100-347 VAC Input, 170 VDC Output, Enclosed Box, UL Listed for Factory or Field Install, Lithium Battery.
-----	---

FIELD INSTALLED OPTIONS


ESL-EMG-SL6-JB-8W	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 100-347 VAC Input, 170 VDC Output, Enclosed Box, UL Listed for Factory or Field Install, Lithium Battery.
-------------------	---



INDOOR FIXTURES

810 DECORATIVE WRAP

The ESL 810 Series is both kelvin and wattage selectable and features an innovative, cost-saving design with easy installation.

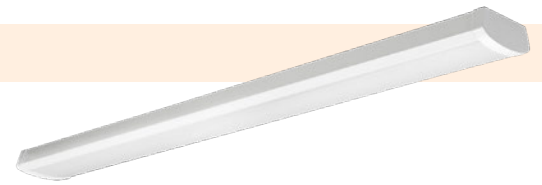


ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CSS-810-4-2040W-D3565K	20W-30W-40W	3500K-4000K-5000K-5700K-6500K	5,200	130	120-277 VAC	4
FACTORY INSTALLED OPTIONS						
-EM	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 120-277 VAC Input, 10-300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field install, Title 20 (SL1-OTB)					
FIELD INSTALLED ACCESSORIES						
ESL-EMG-SL6-OTB-8W	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 120-277 VAC Input, 10-300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field install, Title 20 (SL1-OTB)					

SELECTABLE VAPOR TIGHT

The latest Vapor Tight in ESL Vision's lineup is the most versatile yet! Kelvin & wattage selectable featuring durable, tamper-resistant stainless steel hardware. The hinged design of the lens makes single-person installation a breeze!




Easy Access Panel for Occupancy Sensor Installation
Kelvin & Wattage Selectable

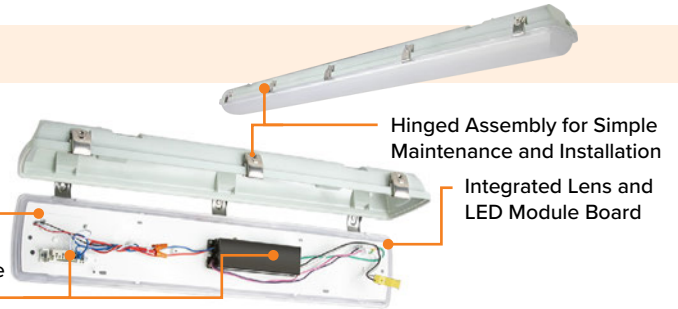

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
4 FOOT						
ESL-VP4-2550W-23550	25W-35W-50W	3500K-4000K-5000K	6,250	125	120-277 VAC	4
FACTORY INSTALLED OPTIONS						
-EM	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 120-277 VAC Input, 10-300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field install, Title 20 (SL1-OTB)					
FIELD INSTALLED ACCESSORIES						
ESL-EMG-SL6-OTB-8W	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 120-277 VAC Input, 10-300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field install, Title 20 (SL1-OTB)					

830 SELECTABLE TROFFERS

The 830 Selectable Troffer series of fixtures are all easily adjusted with a dip switch and are simple to install.

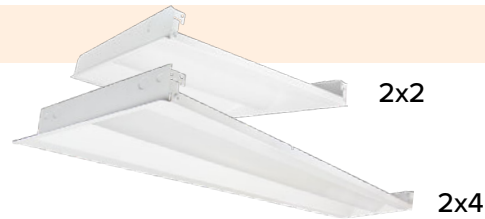


ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-CSS-830-22-2535W-D33550	25W-30W-35W	3500K-4000K-5000K	4,900	140	120-277 VAC	66
ESL-CSS-830-24-2550W-D33550	25W-36W-45W	3500K-4000K-5000K	7,000	140	120-277 VAC	32
FACTORY INSTALLED OPTIONS						
-EM	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 120-277 VAC Input, 10-300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field install, Title 20 (SL1-OTB)					
FIELD INSTALLED ACCESSORIES						
ESL-EMG-SL6-OTB-8W	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minutes Minimum, 120-277 VAC Input, 10-300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field install, Title 20 (SL1-OTB)					

620 INTELLISENSE™ PANEL



ESL Vision's new IntelliSense™ enabled panel is kelvin and wattage selectable and features a built-in receptacle for easy field installation of the SoloSense™ and MultiSense™ controls.

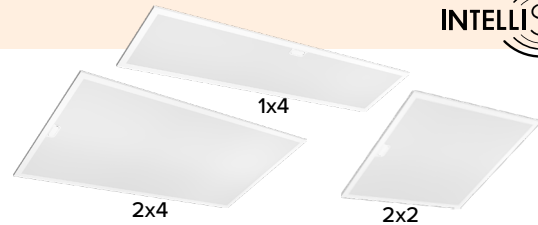

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-ISS-620-14-2040W-3550K	20W-30W-40W	3500K-4000K-5000K	5,180	143	120-277 VAC	96
ESL-ISS-620-22-2040W-3550K	20W-30W-40W	3500K-4000K-5000K	5,140	143	120-277 VAC	96
ESL-ISS-620-24-3050W-3550K	30W-40W-50W	3500K-4000K-5000K	6,650	154	120-277 VAC	48

FACTORY INSTALLED OPTIONS

-EM Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minute Minimum, 100-347 VAC Input, 170 VDC Output, Closed Frame with Flex Conduits, UL Listed for Factory or Field Install, Li-ion Battery. (SL6)

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL6-CSC-8W	Emergency Backup Battery Unit, Auto Test Function, 8-Watt Output, 90-Minute Minimum, 100-347 VAC Input, 170 VDC Output, Closed Frame with Flex Conduits, UL Listed for Factory or Field Install, Li-ion Battery. (SL6)
ESL-ACCS-14-SMK-02	Surface Mount Kit for 1x4
ESL-ACCS-22-SMK-02	Surface Mount Kit for 2x2
ESL-ACCS-24-SMK-02	Surface Mount Kit for 2x4
ESL-ACCS-14-FLK-01	Flange Mount Kit for 1x4
ESL-ACCS-22-FLK-01	Flange Mount Kit for 2x2
ESL-ACCS-24-FLK-01	Flange Mount Kit for 2x4
ESL-ACCS-ACHK-S2	Aircraft Hanging Kit, 10ft

INTELLISENSE™ ACCESSORIES

ESL-ISS-SSEN-01	SoloSense™ Plug and Play 4 Wire Stand Alone PIR + Daylight Harvesting Sensor for 600 Series
ESL-ISS-REM-01	SoloSense™ Remote
ESL-ISS-MSEN-01	MultiSense™ Plug and Play 4 Wire Network PIR + Daylight Harvesting Sensor 600 Series

LINEAR HIGH BAY

Introducing our latest Linear High Bay series, designed for peak performance in any industrial setting with a range of kelvin & wattage selectability, delivering over 61,000 lumens.

Kelvin & Wattage Selectable

Voltage Options
• 120-277 VAC
• 277-480 VAC



Sensor Ready Port

• IntelliSense™ Capable with SoloSense™ or MultiSense™

Selectable Beam Angles

• 90x90°
• 40x100°
• 70x100°

Optional Emergency Backup

Die-Cast Housing



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS (LxWxH)	PALLET QTY
ESL-LHB-85130W-54057	85W-105W-130W	4000K-5000K-5700K	20,000	170	11.22" x 15.00" x 1.89"	126
ESL-LHB-105165W-54057	105W-130W-165W	4000K-5000K-5700K	26,000	170	11.22" x 15.00" x 1.89"	126
ESL-LHB-165240W-54057	165W-215W-240W	4000K-5000K-5700K	36,800	170	11.22" x 20.08" x 1.89"	84
ESL-LHB-255320W-54057	255W-295W-320W	4000K-5000K-5700K	51,000	170	12.40" x 22.05" x 1.89"	84
ESL-LHB-165240W-54057-HV	165W-215W-240W	4000K-5000K-5700K	36,700	170	11.22" x 20.08" x 1.89"	84
ESL-LHB-255320W-54057-HV	255W-295W-320W	4000K-5000K-5700K	51,100	170	12.40" x 22.05" x 1.89"	84

FIELD INSTALLED ACCESSORIES

ESL-ISS-MSEN-03	Network PIR + Daylight Sensor for LHB5
ESL-ISS-REM-01	Remote for all SSEN Sensors
ESL-ISS-SSEN-03	PIR + Daylight Sensor for LHB5
ESL-LHB5-PM	LHB5 Pendant Mount
ESL-LHB5-SM	LHB5 Surface Mount
ESL-LHB5-WG-S	LHB5 Wire Guard for 85130W and 105165W
ESL-LHB5-WG-M	LHB5 Wire Guard for 165240W
ESL-LHB5-WG-L	LHB5 Wire Guard for 255320W
ESL-ACCS-AC-10FT-S2-02	Aircraft Cable 10 Feet Set of 2

*Not Compatible with High Voltage Fixtures



HALOFLEX ROUND HIGH BAY

Designed for versatility and durability, ESL Vision's HaloFlex Series is the ultimate high bay solution for industrial and commercial spaces. With rugged construction and IntelliSense™ capability, it delivers powerful, efficient illumination in any environment.

Multiple Mounting Options

3CCT Kelvin Selectable

3500K-4000K-5000K

Optical Grade Polycarbonate Lens

Durable Die-Cast Housing

Four Sizes & Wattage Ranges, Maximum Lumen Output & Efficiency

- Ø10.04" - 60W-80W-100W
-15,000 Max Lumens, Up to 150 Lm/W
- Ø11.02" - 100W-125W-150W
-22,500 Max Lumens, Up to 150 Lm/W
- Ø12.56" - 100W-150W-200W
-30,000 Max Lumens, Up to 150 Lm/W
- Ø13.35" - 200W-240W-300W
-45,000 Max Lumens, Up to 150 Lm/W



Available in White, Bronze or Black Finishes

ITEM#	SELECTABLE WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-HFX-60100W-13550-BK-90D	60W-80W-100W	3500K-4000K-5000K	15,793	158	120-277 VAC	63
ESL-HFX-100150W-13550-BK-90D	100W-125W-150W	3500K-4000K-5000K	23,495	157	120-277 VAC	63
ESL-HFX-100200W-13550-BK-90D	100W-150W-200W	3500K-4000K-5000K	31,087	155	120-277 VAC	63
ESL-HFX-200300W-13550-BK-90D	200W-240W-300W	3500K-4000K-5000K	45,005	150	120-277 VAC	63
FIELD INSTALLED ACCESSORIES						
ESL-ACCS-CMA2	Conduit Mount for HaloFlex Round High Bays					
ESL-ISS-SSEN-03	SoloSense™ – Stand Alone PIR + Daylight Sensor for Highbay					
ESL-ISS-MSEN-03	MultiSense™ – Network PIR + Daylight Sensor for Highbay					
ESL-ISS-REM-01	SoloSense™ Remote					
EM25*	25W Emergency Backup Unit, Not Compatible with Any Sensors					
EM40*	40W Emergency Backup Unit, Not Compatible with Any Sensors					
FACTORY INSTALLED OPTIONS						
ESL-EMG-HB2-CWR-25W*	25W Emergency Backup Unit, Not Compatible with Any Sensors					
ESL-EMG-HB2-CWR-40W*	40W Emergency Backup Unit, Not Compatible with Any Sensors					

*If the fixture is ordered with EM Options, it is incompatible with any sensors.



OUTDOOR FIXTURES

AREA LIGHT

Upgrade your outdoor space with ESL's ultimate Area Light. Kelvin & wattage selectable for complete control over light output and color temperature. The high impact polycarbonate optics and a rugged, anodized aluminum housing ensure durability in any weather condition.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	PALLET QTY
ESL-AL-100150W-D13050-BZ-T3	100W-120W-150W	3000K-4000K-5000K	25,500	170	122-277 VAC	
ESL-AL-200300W-D13050-BZ-T3	200W-240W-300W	3000K-4000K-5000K	51,000	170	122-277 VAC	
ESL-AL-100150W-D13050-HV-BZ-T3	100W-120W-150W	3000K-4000K-5000K	25,500	170	277-480 VAC	
ESL-AL-200300W-D13050-HV-BZ-T3	200W-240W-300W	3000K-4000K-5000K	51,000	170	277-480 VAC	

FACTORY INSTALLED ACCESSORIES


ESL-PCOF	On/Off Photocell (120-277 VAC)
ESL-PCOFHV	On/Off Photocell (347-538 VAC)

FIELD INSTALLED ACCESSORIES

ESL-ALD1-BZSF*	Slip Fitter Mount
ESL-ALD1-BZUDM*	Universal Direct Mount
ESL-ALD1-BZTM*	Trunnion Mount

* Mounts Sold Separately

Complete Lighting Control Comes in 2 Sizes!



Selectable
3000K-4000K-5000K
100W-120W-100W



Selectable
3000K-4000K-5000K
200W-240W-300W

- Standard 120-277 VAC or HV 277-480 VAC



Innovative Mounting Hardware
• Multiple Mount Options Sold Separately

Slip Fitter (SF)
ESL-ALD1-BZSF

Universal Direct Mount (UDM)
ESL-ALD1-BZUDM

Trunnion Mount (TM)
ESL-ALD1-BZTM



Expertly Crafted

- Rugged Aluminum Housing
- High Impact Polycarbonate Optics
- Deep Heatsink for Optimal Heat Dissipation

FLOOD LIGHT

ESL Vision's Flood Light Series is now more flexible and usable than ever; with the features you expect, now with Selectable Beam Angles as well as Kelvin & Wattages.

Selectable Beam Angles

- 55°
- 75°
- 90°

Die-Cast Housing

75150W

Kelvin & Wattage Selectable

Longer Leads for Easier Installs

- 1020W, 3060W: - 19.7" Leads
- 75150W, 200320W, 380500W - 27.6" Leads



1020W

3060W

200320W

380500W

Integrated On/Off Photocell

Twist Lock On/Off Photocell

Multiple Mounting Options

- 1020W, 3060W: - Knuckle Mount - Trunnion Mount
- 75150W, 200320W, 380500W - Slip Fitter - Yoke Mount



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	SELECTABLE BEAM ANGLE	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	FINISH (ff)	MOUNTING	PALLET QTY
ESL-FLD-1020W-23050-BZ	10W-13W-17W-20W	3000K-4000K-5000K	55°-75°-90°	3,000	150	(BZ) Bronze	Knuckle & Trunnion	192
ESL-FLD-1020W-23050-WH	10W-13W-17W-20W	3000K-4000K-5000K	55°-75°-90°	3,000	150	(WH) White	Knuckle & Trunnion	192
ESL-FLD-3060W-23050-BZ	30W-40W-50W-60W	3000K-4000K-5000K	55°-75°-90°	9,000	150	(BZ) Bronze	Knuckle & Trunnion	90
ESL-FLD-3060W-23050-WH	30W-40W-50W-60W	3000K-4000K-5000K	55°-75°-90°	9,000	150	(WH) White	Knuckle & Trunnion	90
ESL-FLD-75150W-23050-BZ	75W-100W-125W-150W	3000K-4000K-5000K	55°-75°-90°	22,500	150	(BZ) Bronze	Slip Fitter & Yoke Mount	72
ESL-FLD-200320W-23050-BZ	200W-240W-280W-320W	3000K-4000K-5000K	55°-75°-90°	48,000	150	(BZ) Bronze	Slip Fitter & Yoke Mount	22
ESL-FLD-380500W-23050-BZ	380W-420W-450W-500W	3000K-4000K-5000K	55°-75°-90°	75,000	150	(BZ) Bronze	Slip Fitter & Yoke Mount	22

* White Finish is only available for 1020W and 3060W models

CANOPY ROUND & SQUARE

The ESL Vision Canopy Series is now available in both Square & Round housings, giving you the freedom to choose the look that best fits your project without sacrificing performance. Both styles deliver the same industry-leading efficiency, durability, and ease of installation.



Available in Bronze or White
Sensor Ready Port



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	CASE QTY
ROUND CANOPIES - 1ST GEN						
ESL-CP-R-2555W-13050-BZ	25W-40W-55W	3000K-4000K-5000K	8,745	159	120-277 VAC	128
ESL-CP-R-2555W-13050-WH	25W-40W-55W	3000K-4000K-5000K	8,745	159	120-277 VAC	128
ESL-CP-R-60100W-13050-BZ	60W-80W-100W	3000K-4000K-5000K	16,500	165	120-277 VAC	128
ESL-CP-R-60100W-13050-WH	60W-80W-100W	3000K-4000K-5000K	16,500	165	120-277 VAC	128
SQUARE CANOPIES - 5TH GEN						
ESL-CP-3060W-53050-BZ	30W-45W-60W	3000K-4000K-5000K	9,000	150	120-277 VAC	128
ESL-CP-3060W-53050-WH	30W-45W-60W	3000K-4000K-5000K	9,000	150	120-277 VAC	128
ESL-CP-6090W-53050-BZ	60W-75W-90W	3000K-4000K-5000K	13,050	145	120-277 VAC	128
ESL-CP-6090W-53050-WH	60W-75W-90W	3000K-4000K-5000K	13,050	145	120-277 VAC	128

FACTORY INSTALLED OPTIONS

-EM 8W Emergency Backup Unit, Not Compatible with Any Sensors

FIELD INSTALLED ACCESSORIES

ESL-OCCP-LV-02 PIR Occupancy

ESL-REM-LV02 Remote for OCCP-LV-02 Sensor

ESL-EMG-BOX1-EXT-8W 8W Emergency Backup Unit, Not Compatible with Any Sensors



MINI WALL PACK

Keep your building's perimeter bright with ESL Vision's Mini Wall Pack. The built-in photocell will both increase efficiency and safety by automatically turning off the fixture during the day and back on at night. The photocell can easily be disabled for areas that need continuous lighting.

- MULTIWATT SELECTABLE WATTAGE
- 3 CCT SELECTABLE KELVIN



Available in White or Bronze

- 10 YEAR PREMIUM
- DLC LISTED PREMIUM
- UL CERTIFIED
- DIMMABLE ON/OFF
- WET LOCATION
- 3 CCT SELECTABLE KELVIN
- MULTIWATT SELECTABLE WATTAGE

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-MWP-0815W-13050-BZ	8W-12W-15W	3000K-4000K-5000K	2,100	140	120-277 VAC	10
ESL-MWP-0815W-13050-WH	8W-12W-15W	3000K-4000K-5000K	2,100	140	120-277 VAC	10
ESL-MWP-1530W-13050-BZ	15W-20W-30W	3000K-4000K-5000K	4,200	140	120-277 VAC	10
ESL-MWP-1530W-13050-WH	15W-20W-30W	3000K-4000K-5000K	4,200	140	120-277 VAC	10

WALL PACK

ESL's newest 7th Gen Wall Packs feature a classic two-piece design with easy mounting plate for fast installation, and features a built-in on/off photocell for increased efficiency and safety.



Selectable Beam Angles

- 60°
- 90°
- 110°

- 5 YEAR PREMIUM
- DLC LISTED PREMIUM
- UL CERTIFIED
- DIMMABLE ON/OFF
- IP65 RATING
- SELECTABLE BEAM ANGLE
- 3 CCT SELECTABLE KELVIN
- MULTIWATT SELECTABLE WATTAGE

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	PALLET QTY
ESL-WP-4080W-73050-BZ	40W-60W-80W	3000K-4000K-5000K	11,600	145	120-277 VAC	45
ESL-WP-80120W-73050-BZ	80W-100W-120W		17,400	145	120-277 VAC	45

FACTORY INSTALLED OPTIONS

-EM Emergency Backup Battery Unit, Auto Test Function, 8 Watt Output, 90 Minutes, 100-347 VAC Input, 170 VDC Output, Enclosed Box, UL Listed for Factory or Field install, Lithium Battery

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL6-OTB-8W Emergency Backup Battery Unit, Auto Test Function, 8 Watt Output, 90 Minutes, 100-347 VAC Input, 170 VDC Output, Enclosed Box, UL Listed for Factory or Field install, Lithium Battery

ESL-11OCC-LV-BR PIR Occupancy

ESL-REM-100 Remote for OCCP-LV-01 Sensor

FULL CUTOFF WALL PACK

ESL Vision's latest Full Cut Off Wall Pack has a two-piece aluminum housing with easy driver access and features a built-in on/off photocell. 6kV surge protection comes standard with optional emergency backup.



Selectable Kelvin & Wattage

Sensor Ready Port

- 5 YEAR PREMIUM
- DLC LISTED PREMIUM
- UL CERTIFIED
- DIMMABLE ON/OFF
- IP65 RATING
- 3 CCT SELECTABLE KELVIN
- MULTIWATT SELECTABLE WATTAGE

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	PALLET QTY
ESL-FCWP-2060W-33050-BZ	20W-40W-60W	3000K-4000K-5000K	8,560	143	120-277 VAC	57
ESL-FCWP-80120W-33050-BZ	80W-100W-120W		16,965	141	120-277 VAC	36

FACTORY INSTALLED OPTIONS

-EM Emergency Backup Battery Unit, Auto Test Function, 8 Watt Output, 90 Minutes, 100-347 VAC Input, 170 VDC Output, Enclosed Box, UL Listed for Factory or Field install, Lithium Battery

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL6-OTB-8W Emergency Backup Battery Unit, Auto Test Function, 8 Watt Output, 90 Minutes, 100-347 VAC Input, 170 VDC Output, Enclosed Box, UL Listed for Factory or Field install, Lithium Battery

ESL-ISS-SSEN-03 PIR + Daylight Sensor for FCWP


ESL-ISS-REM-01 Remote for ESL-ISS-SSEN-03

CLASS 1 DIVISION 1 HAZARDOUS SERIES

Designed to work in actively explosive environments, the Class 1 Division 1 Hazardous Series of fixtures are ready to handle hazardous conditions and concentrations of flammable combustible vapors, liquids and gases. These fixtures are resistant to shock and vibration, IK10 impact rate, ABS Certified and come standard with 10kV surge protection.



FLOOD



ROUND HIGH BAY



LINEAR HIGH BAY



JELLY JAR



EXIT



ITEM#	WATTAGE	KELVIN (xx)	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	IES FILES	PALLET QTY
FLOOD							
ESL-HZFL-S20W-1xx	20W		2,800	140			42
ESL-HZFL-S40W-1xx ESL-HZFL-S40W-1xx-HV	40W		5,600	140			42
ESL-HZFL-S60W-1xx ESL-HZFL-S60W-1xx-HV	60W		8,400	140			42
ESL-HZFL-S80W-1xx ESL-HZFL-S80W-1xx-HV	80W		11,200	140			42
ESL-HZFL-L100W-1xx [†] ESL-HZFL-L100W-1xx-HV [†]	100W	(30) 3000K (40) 4000K (50) 5000K	14,000	140	(BLANK) MV 100-277 VAC (HV) 200-480 VAC	IES FILES	33
ESL-HZFL-L120W-1xx [†] ESL-HZFL-L120W-1xx-HV [†]	120W		16,800	140			33
ESL-HZFL-L150W-1xx [†] ESL-HZFL-L150W-1xx-HV [†]	150W		21,000	140			33
ESL-HZFL-L200W-1xx [†] ESL-HZFL-L200W-1xx-HV [†]	200W		28,000	140			33
ROUND HIGH BAY							
ESL-HZRHB-S40W-1xx [†]	40W		2,800	140			66
ESL-HZRHB-S60W-1xx [†] ESL-HZRHB-S60W-1xx-HV [†]	60W		8,400	140			66
ESL-HZRHB-S80W-1xx [†] ESL-HZRHB-S80W-1xx-HV [†]	80W		11,200	140			66
ESL-HZRHB-M100W-1xx [†] ESL-HZRHB-M100W-1xx-HV [†]	100W	(30) 3000K (40) 4000K (50) 5000K	14,000	140	(BLANK) MV 100-277 VAC (HV) 200-480 VAC	IES FILES	78
ESL-HZRHB-M150W-1xx [†] ESL-HZRHB-M150W-1xx-HV [†]	150W		21,000	140			78
ESL-HZRHB-L200W-1xx [†] ESL-HZRHB-L200W-1xx-HV [†]	200W		28,000	140			37
ESL-HZRHB-L250W-1xx [†] ESL-HZRHB-L250W-1xx-HV [†]	250W		33,600	140			37
ESL-HZRHB-L280W-1xx [†] ESL-HZRHB-L280W-1xx-HV [†]	280W		39,200	140			37
LINEAR HIGH BAY							
ESL-HZLHB-S20W-1xx [†]	20W		2,800	140			31
ESL-HZLHB-S40W-1xx [†] ESL-HZLHB-S40W-1xx-HV [†]	40W		5,600	140			31
ESL-HZLHB-S60W-1xx [†] ESL-HZLHB-S60W-1xx-HV [†]	60W	(30) 3000K (40) 4000K (50) 5000K	8,400	140	(BLANK) MV 100-277 VAC (HV) 200-480 VAC	IES FILES	31
ESL-HZLHB-L80W-1xx [†] ESL-HZLHB-L80W-1xx-HV [†]	80W		11,200	140			17
ESL-HZLHB-L100W-1xx [†] ESL-HZLHB-L100W-1xx-HV [†]	100W		14,000	140			17
ESL-HZLHB-L120W-1xx [†] ESL-HZLHB-L120W-1xx-HV [†]	120W		16,800	140			17
JELLY JAR							
ESL-HZJJ-10W-1xx	10W		1,400	140			85
ESL-HZJJ-20W-1xx	20W	(30) 3000K (40) 4000K (50) 5000K	2,800	140	(BLANK) MV 120-277 VAC		85
ESL-HZJJ-30W-1xx	30W		4,200	140			85
ESL-HZJJ-40W-1xx	40W		5,600	140			85
ESL-HZJJ-50W-1xx	50W		7,000	140			85

[†]Additional Voltage: (DC12) DC12-48V available upon request



CLASS 1 DIVISION 2 HAZARDOUS SERIES

Designed to work in passively explosive environments, the Class 1 Division 2 Hazardous Series of fixtures can handle hazardous conditions and concentrations of flammable combustible vapors, liquids and gases that may occur under abnormal situations. These fixtures are resistant to shock and vibration, IK10 impact rate, ABS Certified and come standard with 10kV surge protection.



FLOOD



ROUND HIGH BAY



LINEAR HIGH BAY



ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	IES FILES	PALLET QTY
FLOOD							
ESL-HZFL-S20W-2xx	20W		2,800	140			80
ESL-HZFL-S40W-2xx	40W		5,600	140			80
ESL-HZFL-S60W-2xx	60W		8,400	140			80
ESL-HZFL-S60W-2xx-HV†							
ESL-HZFL-M80W-2xx†	80W		11,200	140			73
ESL-HZFL-M80W-2xx-HV†							80
ESL-HZFL-M100W-2xx†	100W		14,000	140			73
ESL-HZFL-M100W-2xx-HV†							
ESL-HZFL-L120W-2xx†	120W	(30) 3000K	16,800	140	(BLANK) MV 100–277 VAC	IES FILES	36
ESL-HZFL-L120W-2xx-HV†		(40) 4000K			(HV) 200–480 VAC		
ESL-HZFL-L150W-2xx†	150W	(50) 5000K	21,000	140			36
ESL-HZFL-L150W-2xx-HV†							
ESL-HZFL-L200W-2xx†	200W		28,000	140			36
ESL-HZFL-L200W-2xx-HV†							
ESL-HZFL-XL250W-2xx†	250W		35,000	140			41
ESL-HZFL-XL250W-2xx-HV†							
ESL-HZFL-XL300W-2xx†	300W		42,000	140			41
ESL-HZFL-XL300W-2xx-HV†							
ESL-HZFL-XL400W-2xx†	400W		56,000	140			41
ESL-HZFL-XL400W-2xx-HV†							
ROUND HIGH BAY							
ESL-HZRHB-S20W-2xx	20W		2,800	140			66
ESL-HZRHB-S40W-2xx	40W		5,600	140			66
ESL-HZRHB-S40W-2xx-HV							
ESL-HZRHB-M60W-2xx	60W		8,400	140			78
ESL-HZRHB-M60W-2xx-HV							
ESL-HZRHB-M80W-2xx	80W		11,200	140			78
ESL-HZRHB-M80W-2xx-HV							
ESL-HZRHB-L100W-2xx†	100W		14,000	140			37
ESL-HZRHB-L100W-2xx-HV†							
ESL-HZRHB-L120W-2xx†	120W	(30) 3000K	16,800	140	(BLANK) MV 100–277 VAC	IES FILES	37
ESL-HZRHB-L120W-2xx-HV†		(40) 4000K			(HV) 200–480 VAC		
ESL-HZRHB-L150W-2xx†	150W	(50) 5000K	21,000	140			37
ESL-HZRHB-L150W-2xx-HV†							
ESL-HZRHB-L200W-2xx†	200W		28,000	140			37
ESL-HZRHB-L200W-2xx-HV†							
ESL-HZRHB-XL250W-2xx†	250W		33,600	140			29
ESL-HZRHB-XL250W-2xx-HV†							
ESL-HZRHB-XL300W-2xx†	300W		39,200	140			29
ESL-HZRHB-XL300W-2xx-HV†							
ESL-HZRHB-XL400W-2xx†	400W		56,000	140			29
ESL-HZRHB-XL400W-2xx-HV†							
LINEAR HIGH BAY							
ESL-HZLHB-S20W-2xx†	20W		2,800	140			31
ESL-HZLHB-S40W-2xx†	40W		5,600	140			31
ESL-HZLHB-S40W-2xx-HV†							
ESL-HZLHB-L60W-2xx†	60W	(30) 3000K	8,400	140	(BLANK) MV 100–277 VAC	IES FILES	17
ESL-HZLHB-L60W-2xx-HV†		(40) 4000K			(HV) 200–480 VAC		
ESL-HZLHB-L80W-2xx†	80W	(50) 5000K	11,200	140			17
ESL-HZLHB-L80W-2xx-HV†							

*Additional Voltage: (DC12) DC12–48V available upon request

SPORT LIGHT

Introducing STADIA, the revolutionary new sports light from ESL Vision. Crafted with high-impact polycarbonate optics and a powder coated, die-cast aluminum body for extreme durability, this versatile light delivers exceptional brightness and clarity and offers a wide range of options to achieve the ideal illumination for your venue. With optional network integration for light management and versatile mounting choices, the STADIA series is destined to be your MVP for many seasons to come.

INTRODUCING



STADIA AERO



STADIA APEX



ITEM#	SELECTABLE WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE (vz)	PALLET QTY
ESL-SPTA-600800W	600W-700W-800W	5000K	114,000	140	200-480 VAC	10
ESL-SPTX-400600W-150	400W-500W-600W		103,600	182		10
ESL-SPTX-400800W-150	400W-600W-800W		135,800	181		10
ESL-SPTX-8001200W-150	800W-1000W-1200W		205,100	181		10

FACTORY INSTALLED OPTIONS

ESL-SPT-DISTRIBUTION-BOX-8 Distribution Box for Stadia, Supports up to 8 Fixtures

FIELD INSTALLED ACCESSORIES



ESL-SPT-LASER Stadia Aiming Laser

ESL-SPTA-RM Retrofit Mount for SPTA

ESL-SPTA-SF Slip Fitter Mount for SPTA

Precision
LIGHTING LAYOUTS

ESL Vision offers lighting layouts with illuminance calculations and aiming diagrams for pin-point precision in creating the optimal lighting for any venue. Plan, price, bid and present your projects with confidence!

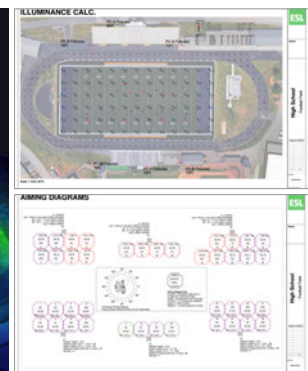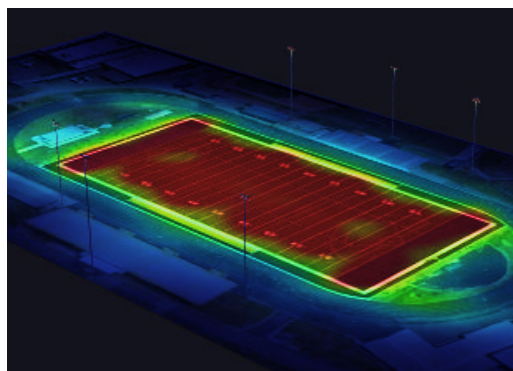

SYNAPSE

SYNAPSE WIRELESS CONTROL SYSTEM

ESL Vision offers the Synapse Wireless Control System for our Stadia Lighting Series. This system utilizes integrated wireless controllers to connect each light to the Synapse SimplySnap Mesh Network. Here the status and programming of each light in the network can be addressed using a web browser based user interface. The user can choose to use **SimplySnap Local** or **SimplySnap Cloud LM-Base** to connect to each light in the system. The SNAP system offers enhanced back-up, management of multiple sites, outage notifications and performance reports.




- **FIELD-INSTALLABLE BEFORE OR AFTER FIXTURE MOUNTING, NO REWIRING REQUIRED**
- **WIRELESSLY CONTROL DYNAMIC LIGHTING SETTINGS FROM YOUR PHONE, COMPUTER OR BASE STATION**
- **CONTROL INDIVIDUAL FIXTURES OR GROUPS OF FIXTURES**
- **CREATE CUSTOM SCENES OR DYNAMIC BEHAVIORS**



SimplySnap Local

- Local management of lights, zones, scenes and schedule
- No internet required
- Built-in WiFi AP or Ethernet
- Browser based app
- Push-button control (CBS)

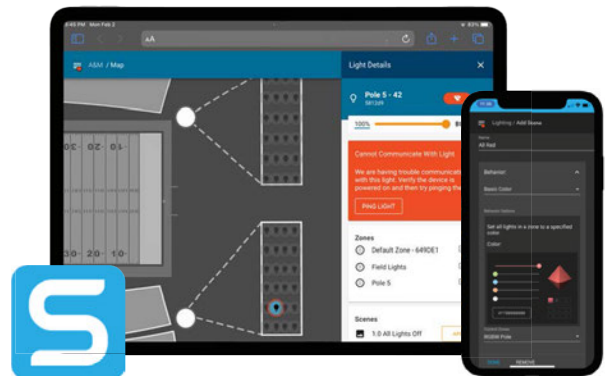

SimplySnap Cloud LM-Base

- Progressive web app
- Cloud map, scenes and schedules
- Access from anywhere
- Multi-site management
- Single UI across multiple gateways
- Energy reporting
- Cloud user account levels
- Automatic Backups

CONTACT YOUR REPRESENTATIVE TO LEARN MORE



EMERGENCY

EMERGENCY DRIVERS

BOX1 – 8 WATT



- Field or Factory Installation – UL 924 and CSA C22.2 No 141 emergency lighting compliant
- Meets CEC Title 20 requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- High voltage input
- Constant power output provides 90 minutes of consistent egress lighting with no degradation
- Suitable for wet locations

ITEM #	DESCRIPTION
ESL-EMG-BOX1-EXT-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, wet-rated box, UL listed for factory or field install, lithium battery

HB2-CWR – 25 WATT, 40 WATT



- Field or Factory Installation – UL 924 and CSA C22.2 No 141 emergency lighting compliant
- Meets CEC Title 20 requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- IP65 wet location listed
- For use with Round High Bay fixture with integrated 0–10V drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation

ITEM #	DESCRIPTION
ESL-EMG-HB2-CWR-25W	Emergency backup battery unit, auto test function, 25-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, wet rated box, UL listed for factory or field install, Lithium battery.
ESL-EMG-HB2-CWR-40W	Emergency backup battery unit, auto test function, 40-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, wet rated box, UL listed for factory or field install, Lithium battery.

SL6-CSC – 8 WATT, 18 WATT, 40 WATT, 40 WATT HIGH VOLTAGE



- Field or Factory Installation – UL 924 and CSA C22.2 No.141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Slim profile design
- Compatible with AC input lamps and DC output drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- An illuminated test switch/charging indicator light is provided

ITEM #	DESCRIPTION
ESL-EMG-SL6-CSC-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.
ESL-EMG-SL6-CSC-18W	Emergency backup battery unit, auto test function, 18-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.
ESL-EMG-SL6-CSC-40W	Emergency backup battery unit, auto test function, 40-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.
ESL-EMG-SL6-CSC-40W-HV	Emergency Backup Battery Unit, Auto Test, 40W Output, 90 Min, 277-480VAC Input, 310-400VDC Output, Closed Frame Single Conduit, Li-ion Battery, White Finish, UL Listed

SL6-JB – 8 WATT



- Field or Factory Installation–UL 924 and CSA C22.2 No. 141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Compatible with AC input lamps and DC output drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- Large wiring cavity simplifies the wiring process for contractors, saving time and effort during setup

ITEM #	DESCRIPTION
ESL-EMG-SL6-JB-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, enclosed box, UL listed for factory or field install, Lithium battery.

EMERGENCY DRIVERS

SL6-OTB – 8 WATT, 18 WATT



- Field or Factory Installation – UL 924 and CSA C22.2 No.141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Slim profile design
- Compatible with AC input lamps and DC output drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- Lithium-ion battery (7–10 year life expectancy with >1000 charging cycles)
- 2-Wire illuminated test switch included

ITEM #	DESCRIPTION
ESL-EMG-SL6-OTB-8W	Emergency Backup Battery Unit, Auto Test, 8W Output, 90 Min, 100-347VAC Input, 170VDC Output, Open Terminal Block Wiring, Li-ion Battery, UL Listed
ESL-EMG-SL6-OTB-18W	Emergency Backup Battery Unit, Auto Test, 18W Output, 90 Min, 100-347VAC Input, 170VDC Output, Open Terminal Block Wiring, Li-ion Battery, UL Listed

EMERGENCY HOTSPOT

Turn nearly any fixture into an LED Emergency with ESL Vision's Emergency Hotspot. Producing an amazing 8 Watt and 1,200-Lumen output, this Hotspot provides generous light to a wide range of fixtures.

- Provides 90 Minutes Emergency Light
- Low Power Consumption
- Illuminated Test Switch
- Switches to Emergency Mode when Power Fails
- ROHS and FCC Part 15 Compliant

LED DRIVER

- Small Form Factor Size
- Low Power Consumption
- ROHS & FCC Part 15 Compliant

Li ION BATTERY


- Provides 90 minutes of Emergency Service
- Only 24 Hours for a Full Charge
- Activates in a Power Failure

TEST BUTTON

- Illuminated Test Button
- Easy Access for Monthly Testing

LED LIGHT STRIP

- Will Fit Nearly Any Luminaire
- 1,200 Lumens
- Simple Installation

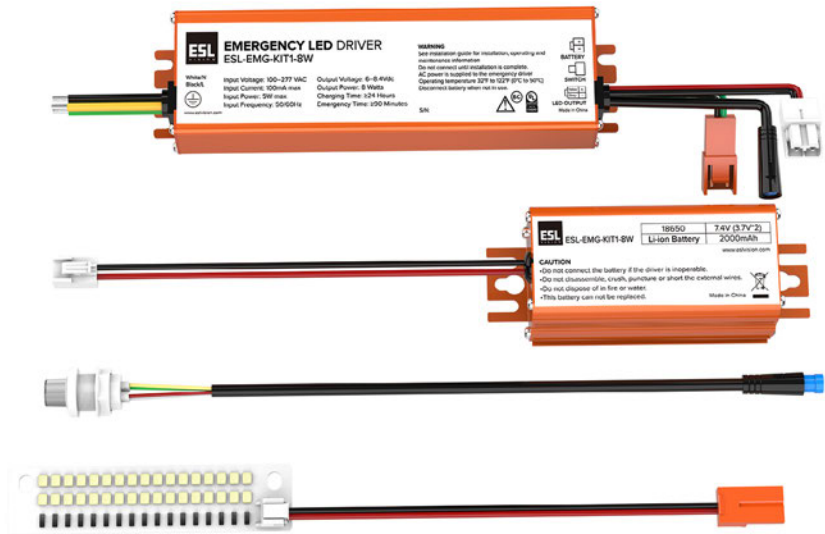

ITEM #	DESCRIPTION
ESL-EMG-KIT1-8W	Emergency backup battery kit unit, 8-watt output, 90-minute minimum, 100–277 VAC input, high efficacy LED module with 1,200lm output power



[CLICK HERE TO VIEW](#)



ESL's Latest Offerings

When the environment is at its harshest, lighting must be uncompromising. CleanBeam™ Heavy Washdown fixtures are purpose engineered for the rigors of food processing, where constant exposure to high-pressure washdowns, chemicals, and extreme sanitation demands can quickly destroy lesser products. With sealed IP69K construction, robust die-cast housings, and precision molded gasketing, these fixtures deliver lasting reliability and performance. Designed by engineers who understand food facilities, CleanBeam™ sets the standard for safety, durability, and clarity in the industry's most demanding interior applications.



CONTROLS

STAND-ALONE CONTROLS



This comprehensive family of controls integrates seamlessly with the new 600 Series of IntelliSense™ Quick-Connect fixtures. It offers both stand-alone and networked solutions, with compatibility expanding to support additional products in our line.

ITEM #	DESCRIPTION
ESL-ISS-MSEN-01	IntelliSense™ MultiSense™ sensor with PIR Occupancy and Daylight Harvesting, IP20
ESL-ISS-MSEN-03	IntelliSense™ MultiSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40
ESL-ISS-SSEN-01	IntelliSense™ SoloSense™ sensor with PIR Occupancy and Daylight Harvesting, IP20
ESL-ISS-SSEN-03	IntelliSense™ SoloSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40
ESL-ISS-REM-01	IntelliSense™ SoloSense™ remote control, powered by (2) CR2032 batteries
ESL-OCCP-LV-01	Stand-alone PIR occupancy sensor, 12V–24 VDC, uses REM-100 for programming, wet rated, white finish, field installable
ESL-11OCC-LV-BR	Microwave occupancy sensor for 6th gen Wall Pack and 2nd gen FCWP / ff= (blank) White, (BR) Brown
ESL-REM-100	Hand-held remote
ESL-OCCP-LV-02	Stand-alone PIR occupancy sensor, 12V–24 VDC, uses REM-100 for programming, wet rated, white finish, field installable
ESL-REM-LV02	Hand-held remote

**AQUADOME™
HIGH BAY**

**AQUABEAM™
LINEAR**

ASK US ABOUT OUR CLEANBEAM SERIES



WWW.ESLVISION.COM
888.493.5559

Headquarters
1957 S 4800 W
Salt Lake City, UT, USA

Atlanta
6371 Corley Road
Norcross, GA, USA

Questions or Comments
www.eslvision.com
customerservice@eslvision.com
ESL-CAT-VOL26_V01