

Key Features & Benefits:

- Wet Location Approved
- Omnidirectional
- Rated for Fully Enclosed Fixtures



Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Technical Specifications:

- Power: 36 Watts
- Lumen Output: Up to 4,585 Lumens
- Efficacy (lm/W): Up to 127 Lumens per Watt
- Kelvin: 3000K, 4000K, 5000K
- CRI: >80
- Input Voltage: 120-277 VAC
- Life Span: 50,000 Hours
- Beam Angle: 300°
- Dimensions(ØxH): 3.66" x 9"
- Weight(lbs): 1.6 lbs
- Base Type: E39/E26
- Operating Temperature: -4 ~ 149°F (-20 ~ 65°C)
- Power Factor: >0.95
- Total Harmonic Distortion (THD): < 20%




No Fans



No Noise



No Bugs

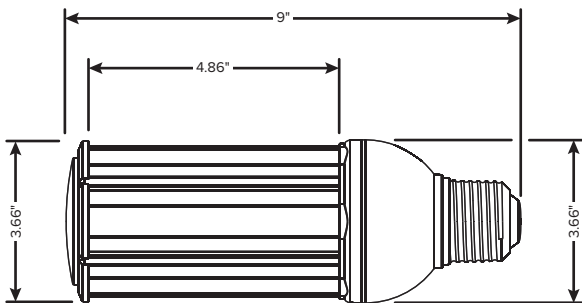

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
ESL-CL-36W-230	36W	4,135	115	3000K
ESL-CL-36W-240	36W	4,355	121	4000K
ESL-CL-36W-250	36W	4,585	127	5000K

*2700K and 5700K available upon request

Ordering Guide:

Example Part Number: **ESL-CL-36W-230S**

ESL	-	CL	-	36W	-	2	-		-	
ESL		TYPE		WATTS		GENERATION		KELVIN		BASE
		CL		36W (36 Watts)		2 (2nd Generation)		30 (3000K) 40 (4000K) 50 (5000K)		S (E26) M (E39)

Additional Options:

OPTIONS

ESL-SP-277 (Surge Protector up to 277 VAC)