

WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in temperatures ranging from -40°F to 104°F.
- This luminaire is designed to be horizontally mounted with the LEDs facing down

Pendent with 3/4 inch Conduit


STEP 1:

Loosen the screw on side of the light, removing the bracket from Canopy light by pulling it slightly out. Leave the ring on bracket.

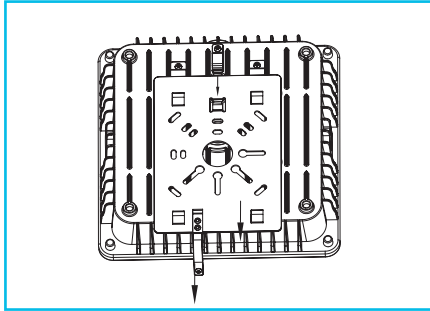


STEP 2:

Connect the wires threaded from conduit and Canopy, Black wire for Line, White for Neutral, Green/Yellow Green for Ground.

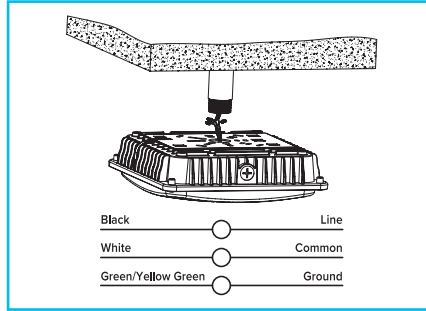

STEP 3:


Screw the Conduit into the hole on top of Canopy light.

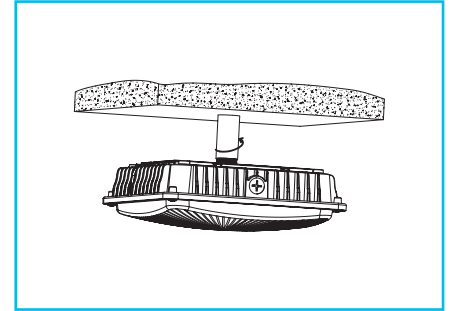

Mounting Plate Installation


STEP 1:

Remove the screw that holds the mounting plate to the fixture and detach the mounting plate.




STEP 2:

Remove both J-Box screws and set aside for mounting of plate. Position the mounting plate over the J-Box and feed the power supply through the center of the mounting plate. Using the J-Box screws faster the mounting plate to J-Box.




STEP 3:

Hang that fixture on the mounting plate with the hook. Hook up the fixture to the power supply. Refer to wiring diagram for proper wiring installation.



STEP 4:

Rotate the fixture up to be flush with the mounting surface and install the mounting screw.

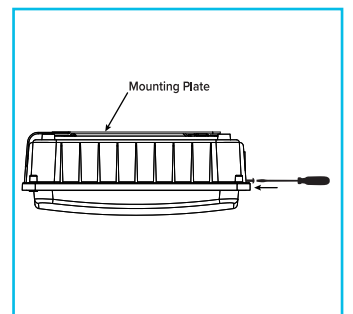

Wiring Diagram

Please see wiring diagram below for 0-10V dimming,

