

Key Features & Benefits:

- Housing:
 - 5VA UV protected fiberglass housing
 - Silicone perimeter gasket
 - Stainless steel mounting brackets
- Lens:
 - Clear 100% impact modified acrylic
 - UV stabilized lens
 - Clear polycarbonate clips
- Gear Tray:
 - Pre-painted cold rolled steel
 - Easy access for quick installation
 - Secured with stainless steel wire
- Long Life:
 - 10 year warranty (12 hour run times)
 - 7 year warranty (24 hour run times)
- Ingress IP66 - Suitable for wet locations
- Control Options:
 - Photocell
 - Occupancy
- Emergency capable
- 1/2" NPT / M20 fittings on both sides



Project: _____

Date: _____

Catalog #: _____

Notes: _____



Electrical Data:


Light Specifications:

- Lumen Output: Up to 6,720 Lumens
- Efficacy (lm/W): Up to 112 Lumens per Watt
- Kelvin: 4000K, 5000K
- Color Rendering Index (CRI): >82
- Rated Life: > 80,000 hrs

Driver Data:

- Input Voltage: 120-277 VAC
- Input Power: 60W
- Input Current @ 120V: 0.5 Amps
- Input Current @ 240V: 0.25 Amps
- Input Current @ 277V: 0.216 Amps
- Total Harmonic Distortion (THD): <10%
- Power Factor: >0.99
- Operating Temperature: -4 ~ 122°F

Single Ti Normal Distribution




* Made in the USA option available upon request

Catalog Data:

	ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
NARROW DISTRIBUTION	ESL-TiHO-VP8N-S-60W-F40	60W	6,360	106	4000K
	ESL-TiHO-VP8N-S-60W-F50	60W	6,360	106	5000K
	ESL-TiHO-VP8N-P-60W-F40	60W	6,540	109	4000K
	ESL-TiHO-VP8N-P-60W-F50	60W	6,720	112	5000K

Ordering Guide: Example Part Number: ESL-TiHO-VP8N-P-60W-F40

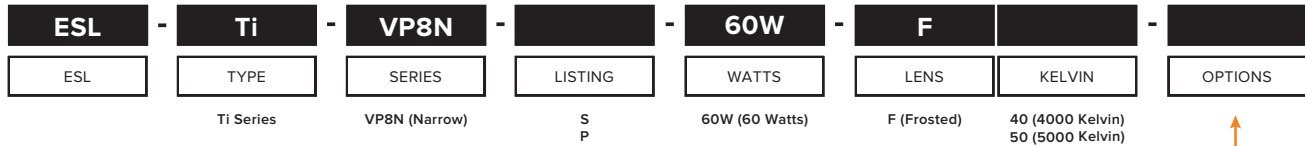

Additional Options:

- **Emergency:**
 - ESL-EMG-FDC-9.5W (Emergency Backup, 1100 Lumens, 90 Min)
 - **Cord Sets:***
 - ESL-CS3W-6 (Cord Set, White, 3 wire, 6 foot)
 - ESL-CS3W-6P (Cord Set, White, 3 wire, 6 foot, Standard Plug)
 - ESL-CS3W-6TL (Cord Set, White, 3 wire, 6 foot, Twist lock Plug)
 - ESL-CS3W-12 (Cord Set, White, 3 wire, 12 foot)
 - ESL-CS3W-12P (Cord Set, White, 3 wire, 12 foot, Standard Plug)
 - ESL-CS3W-12TL (Cord Set, White, 3 wire, 12 foot, Twist lock Plug)
 - **Latches:**
 - ESL-VPSS (Stainless Steel Latches)
 - **Miscellaneous:**
 - ESL-SPD-277-1 (Surge Protector; 100-277V)
 - ESL-480V-SD01 (480 Volt Step Down Transformer)
 - **Sensors & Controls:**
 - ESL-4OCC (Microwave Occupancy Sensor)
 - ESL-4OCP (Photocell & Microwave Occupancy Sensor)
 - ESL-4OPH (Photocell)
 - ESL-3OCC (IP65 High Bay 0-10v Dimming Sensor)
 - ESL-REM100 (Remote for EL-3OCC)
 - ESL-REM101 (Remote for ESL-4OCC, 4OCP, 4OPH)
 - **Mounting:**
 - ESL-VP-CM-VP4X (Direct Mount to the Ceiling for the 2', 4', 8' Narrow and Wide Body Fixture - 2 per)
 - ESL-VP-45DM-VP4X (45 Degree Mount for the 2', 4', 8' Narrow and Wide Body Fixture - 2 per)
- *Other lengths and black cord available upon request

Dimensions:

