



WARNING

1. To avoid electric shock, disconnect power at service source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch any part of the fixture while it is powered up and in service.
5. If there is any problem with the fixture, turn off power and **DO NOT** attempt repair unless you are a qualified electrician, technician or customer service member.

Wiring Diagram

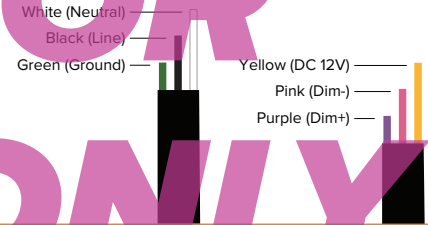


Hook Mount Installation

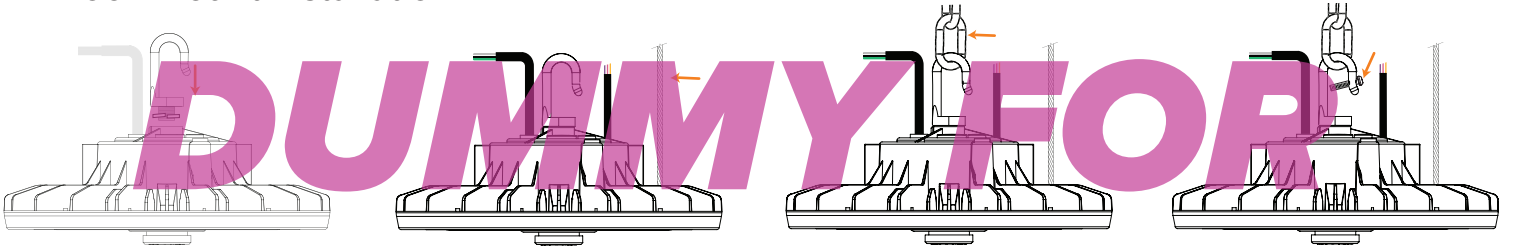

1. Secure spring washer around base of hook mount. Screw hook mount into top of fixture.
2. Attach the supplied safety cable to the fixture and secure it to the ceiling or overhead structure.
3. Attach fixture assembly to eye bolt, chain in ceiling or other overhead structure.
4. Install supplied set screw into hook mount to secure chain. Wire the fixture as per Diagram 1.

Trunnion Mount Installation


(sold separately)

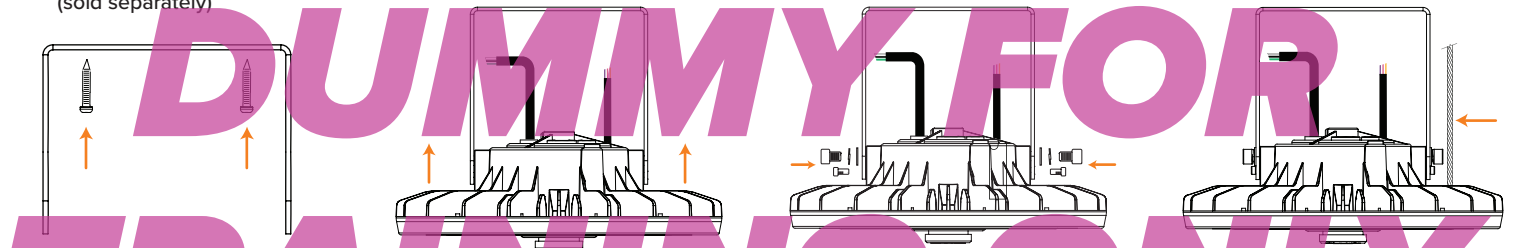

1. Attach trunnion mount to ceiling or other overhead structure with screws or bolts (not supplied).
2. Slide fixture into the trunnion and align the holes of the fixture and mount.
3. Secure fixture to trunnion mount with supplied bolts and set screws.
4. Attach supplied safety cable to fixture and secure. Wire the fixture per Diagram 1.

Conduit Mount Installation

(sold separately)

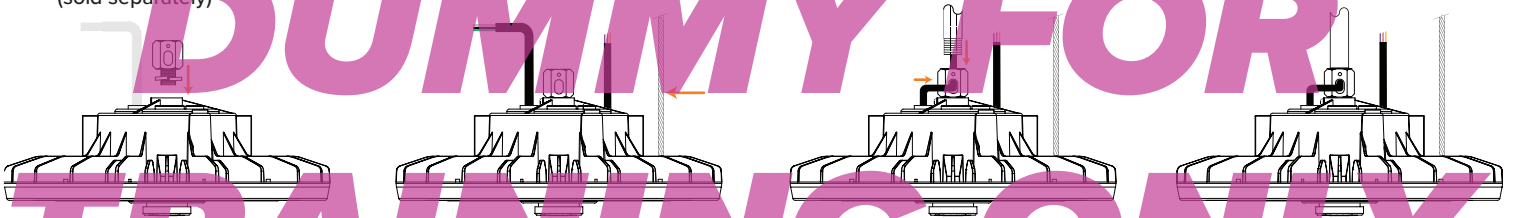

1. Secure spring washer around base of conduit mount. Screw conduit mount into top of fixture.
2. Attach supplied safety cable to fixture and secure to ceiling or other overhead structure.
3. Feed the power cable through the hole in the conduit mount and then into the conduit. Secure conduit to fixture tightly.
4. Wire the fixture per Diagram 1.