



WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before installation, maintenance, or removal; disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.


Installation




1 Assemble the LED module to the arm brackets. Use the included Type B bolt sets for mounting. Once assembled, secure the Type C tilt guide screws.




2 For pole top mounting, use the provided TYPE A bolt set to secure the fixture as shown in Mounting Configurations (below). Tighten to a minimum of 15 IN-LB.

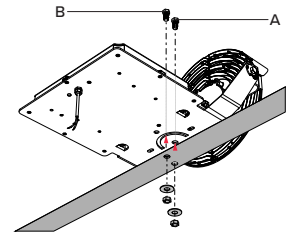

3 For crossbeam mounting, use one each of the provided TYPE A and TYPE B bolt sets to secure the fixture as shown in Mounting Configurations (below). Tighten to a minimum of 15 IN-LB.

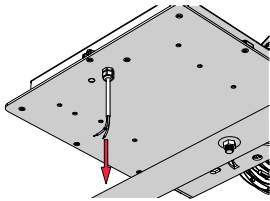


4 Run the power cable to the junction box and connect according to the Wiring Diagram.

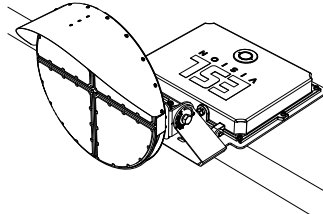


5 Restore power and check that the fixture is working properly.


Mounting Configurations

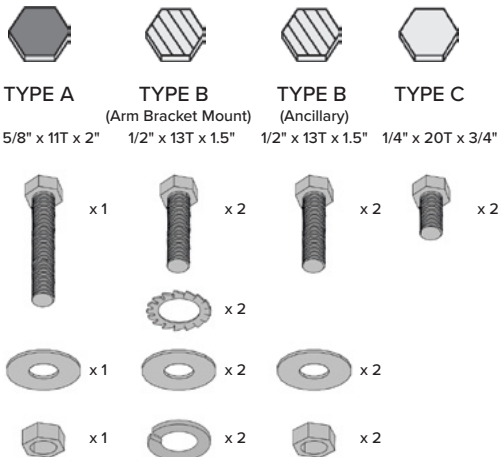

Pole Top Mount Configuration

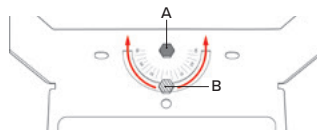

Crossbeam Mount Configuration

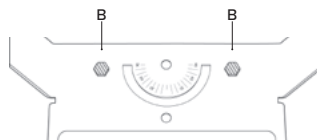

For additional security ancillary TYPE B bolts may be mounted in the configurations shown.

Wiring Diagram

