

### Key Features & Benefits:

- Housing:
  - 5VA UV protected fiberglass housing
  - Silicone perimeter gasket
  - Stainless steel mounting brackets
- Lens:
  - Clear 100% impact modified acrylic
  - UV stabilized lens
  - Clear polycarbonate clips
- Gear Trey:
  - Pre-painted cold rolled steel
  - Easy access for quick installation
  - Secured with stainless steel wire
- Long Life:
  - 10 year warranty (12 hour run times)
  - 7 year warranty (24 hour run times)
- Ingress IP66 - Suitable for Wet Locations
- Control Options:
  - Photocell
  - Occupancy
- Emergency Capable
- 1/2" NPT / M20 Fittings on Both Sides



Project: \_\_\_\_\_ Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_



### Electrical Data:


#### Light Specifications:

Lumen Output: Up to 7,975 Lumens  
 Efficacy (lm/W): Up to 128 Lumens per Watt  
 Kelvin: 3000K, 3500K, 4000K, 5000K  
 Color Rendering Index (CRI): >82  
 Rated Life: > 80,000 hrs

#### Driver Data:

Input Voltage: 120-277 VAC  
 Input Power: 66W  
 Input Current @ 120V: 0.55 Amps  
 Input Current @ 240V: 0.275 Amps  
 Input Current @ 277V: 0.238 Amps  
 Total Harmonic Distortion (THD): <10%  
 Power Factor: >0.99  
 Operating Temperature: -4 ~ 122°F


### Triple Ti Normal Distribution



**Catalog Data:**

|                            | ITEM#                 | WATTS | LUMEN OUTPUT | EFFICACY (lm/W) | KELVIN | DLC QPL CODE |
|----------------------------|-----------------------|-------|--------------|-----------------|--------|--------------|
| <b>NORMAL DISTRIBUTION</b> | ESL-TI-VP4N-S-66W-F30 | 66W   | 7,780        | 125             | 3000K  | PNSU9MPT     |
|                            | ESL-TI-VP4N-S-66W-F35 | 66W   | 7,795        | 125             | 3500K  | PXPBM8AQ     |
|                            | ESL-TI-VP4N-S-66W-F40 | 66W   | 7,880        | 126             | 4000K  | PVNRNZGH     |
|                            | ESL-TI-VP4N-S-66W-F50 | 66W   | 7,975        | 128             | 5000K  | P13ABB63     |

**Ordering Guide:** Example Part Number: **ESL-Ti-VP4N-S-66W-F40**

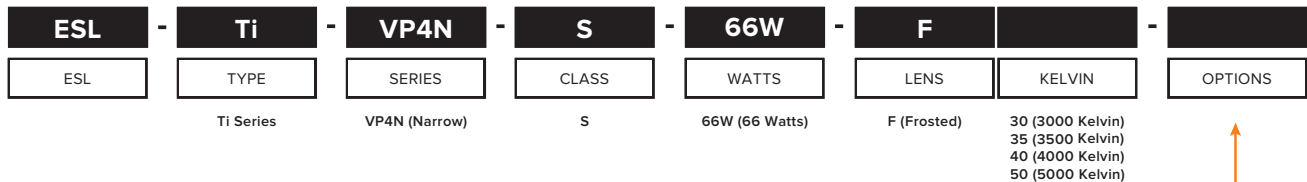

**Additional Options:**

- ESL-4OCC-LDD      Photocell/Occupancy Sensor for Standard Mounting, Dip Switch, 0-10v
- ESL-REM-100      Remote for 2OCC-HDD, 3OCC/B, 4OCC-LDD, 8OCC
- ESL-EMG-FDC-30W      Emergency Backup, 1100 Lumens, 90 Min
- ESL-EMG-2DC-9W      Emergency Backup, DC, 9 Watts
- ESL-CS3W-6\*      Cord Set, White, 3 wire, 6 foot
- ESL-CS3W-6P\*      Cord Set, White, 3 wire, 6 foot, Standard Plug
- ESL-CS3W-6TL\*      Cord Set, White, 3 wire, 6 foot, Twist lock Plug
- ESL-CS3W-12\*      Cord Set, White, 3 wire, 12 foot
- ESL-CS3W-12P\*      Cord Set, White, 3 wire, 12 foot, Standard Plug
- ESL-CS3W-12TL\*      Cord Set, White, 3 wire, 12 foot, Twist lock Plug
- ESL-SPD-277-1      Surge Protector; (100-277 VAC)
- ESL-480V-SD01      480 Volt Step Down Transformer
- ESL-VP-CM-VP4X      Direct Mount to the Ceiling for the 2',4',8' Narrow and Wide Body Fixture - 2 per
- ESL-VP-45DM-VP4X      45 Degree Mount for the 2',4',8' Narrow and Wide Body Fixture - 2 per
- ESL-VP-PM-VP4X      Pendant Mount 3/8" Standard - 2 per
- ESL-VP-CH-VP4X      Chain Hang CT-Bail - 2 per
- ESL-VPSS      Stainless Steel Latches (2'=6 latches) (4' =8 latches) (VPHB' =12 latches)

\*Other lengths and black cord available upon request

**Dimensions:**

