

Key Features & Benefits:

- Housing:
 - 5VA UV protected fiberglass housing
 - Silicone perimeter gasket
 - Stainless steel mounting brackets
- Lens:
 - Clear 100% impact modified acrylic
 - UV stabilized lens
 - Clear polycarbonate clips
- Gear Trey:
 - Pre-painted cold rolled steel
 - Easy access for quick installation
 - Secured with stainless steel wire
- Long Life:
 - 10 year warranty (12 hour run times)
 - 7 year warranty (24 hour run times)
- Ingress IP66 - Suitable for Wet Locations
- Control Options:
 - Photocell
 - Occupancy
- Emergency Capable
- 1/2" NPT / M20 Fittings on Both Sides



Project: _____

Date: _____

Catalog #: _____

Notes: _____



Electrical Data:


Light Specifications:

Lumen Output: Up to 4,752 Lumens
 Efficacy (lm/W): Up to 132 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >82
 Rated Life: > 80,000 hrs


Driver Data:

Input Voltage: 120-277 VAC
 Input Power: 36W
 Input Current @ 120V: 0.3 Amps
 Input Current @ 240V: 0.15 Amps
 Input Current @ 277V: 0.13 Amps
 Total Harmonic Distortion (THD): <10%
 Power Factor: >0.99
 Operating Temperature: -4 ~ 122°F

Double Ti
Normal Distribution




Double Ti
Wide Distribution



Catalog Data:

	ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
NORMAL DISTRIBUTION	ESL-TI-VP4N-S-36W-F30	36W	4,175	126	3000K	PSDPBJU2
	ESL-TI-VP4N-S-36W-F35	36W	4,180	126	3500K	PYGZO7F7
	ESL-TI-VP4N-S-36W-F40	36W	4,230	128	4000K	P9H6X8N0
	ESL-TI-VP4N-S-36W-F50	36W	4,280	129	5000K	P4J4RGF2
—WIDE— DISTRIBUTION	ESL-TI-VP4W-S-36W-F30	36W	4,536	126	3000K	N/A
	ESL-TI-VP4W-S-36W-F35	36W	4,536	126	3500K	N/A
	ESL-TI-VP4W-S-36W-F40	36W	4,644	129	4000K	N/A
	ESL-TI-VP4W-S-36W-F50	36W	4,752	132	5000K	N/A

Ordering Guide: Example Part Number: **ESL-Ti-VP4N-S-36W-F40**

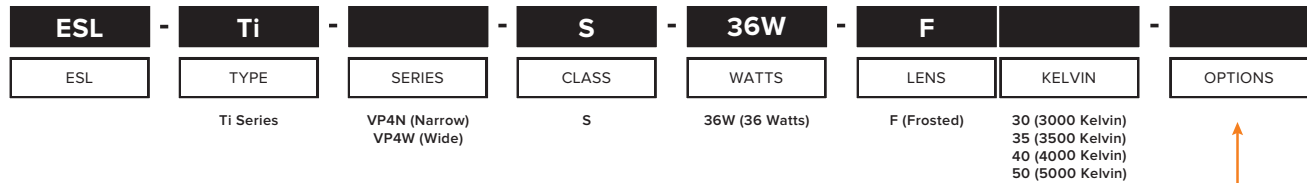

Additional Options:

- ESL-4OCC-LDD Photocell/Occupancy Sensor for Standard Mounting, Dip Switch, 0-10v
 - ESL-REM-100 Remote for 2OCC-HDD, 3OCC/B, 4OCC-LDD, 8OCC
 - ESL-EMG-FDC-30W Emergency Backup, 1100 Lumens, 90 Min
 - ESL-EMG-2DC-9W Emergency Backup, DC, 9 Watts
 - ESL-CS3W-6* Cord Set, White, 3 wire, 6 foot
 - ESL-CS3W-6P* Cord Set, White, 3 wire, 6 foot, Standard Plug
 - ESL-CS3W-6TL* Cord Set, White, 3 wire, 6 foot, Twist lock Plug
 - ESL-CS3W-12* Cord Set, White, 3 wire, 12 foot
 - ESL-CS3W-12P* Cord Set, White, 3 wire, 12 foot, Standard Plug
 - ESL-CS3W-12TL* Cord Set, White, 3 wire, 12 foot, Twist lock Plug
 - ESL-SPD-277-1 Surge Protector; (100-277 VAC)
 - ESL-480V-SD01 480 Volt Step Down Transformer
 - ESL-VP-CM-VP4X Direct Mount to the Ceiling for the 2',4',8' Narrow and Wide Body Fixture - 2 per
 - ESL-VP-45DM-VP4X 45 Degree Mount for the 2',4',8' Narrow and Wide Body Fixture - 2 per
 - ESL-VP-PM-VP4X Pent Mount 3/8" Standard - 2 per
 - ESL-VP-CH-VP4X Chain Hang CT-Bail - 2 per
 - ESL-VPSS Stainless Steel Latches (2'=6 latches) (4' =8 latches) (VPHB' =12 latches)
- *Other lengths and black cord available upon request

Dimensions:

