

Key Features & Benefits:

- Ultra slim profile
- Pendant or surface mount
- Single array diode
- Ingress wet rated IP65
- Continuous gasketed seal
- Optical grade polycarbonate lens:
 - UV stabilized
 - Molded prismatic for optimal uniformity
 - Impact resistant
- Limited 10 year warranty
- Environmentally Friendly:
 - No mercury
 - No hazardous substances
 - Reduced energy consumption
- 0-10V Dimming optional
- Die-cast aluminum housing
- (3) 1/2" Threaded conduit on sides
- (1) 3/4" Threaded conduit on back of housing
- DLC 4.0



Project: _____ Date: _____
 Catalog #: _____
 Notes: _____





Driver Specifications:

Input Power: 65 Watts
 Input Voltage: 120-277 VAC
 Input Current @ 120: 0.54 Amps
 Input Current @ 277: 0.23 Amps
 Total Harmonic Distortion (THD):
 THD @ 120V: 10%
 THD @ 277V: 14%

Light Specifications:


Lumen Output: Up to 4,200 Lumens
 Efficacy (lm/W): Up to 93 Lumens
 Kelvin: 4000K, 5000K
 Color Rendering Index (CRI): >70
 Beam Angle: 155-160°
 Lens Type: Polycarbonate Optical Lens
 Photocell Compatible: Yes
 L70 Lifetime: >50,000 Hours

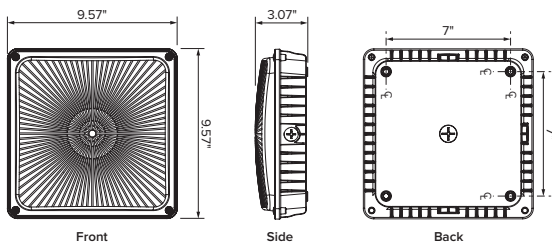

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
ESL-CP-65W-240	65W	6,458	101	4000K	PCXJT6UB
ESL-CP-65W-250	65W	6,600	101	5000K	P1JGPPXA

Reference Guide

Example Part Number: **ESL-CP-65W-250**

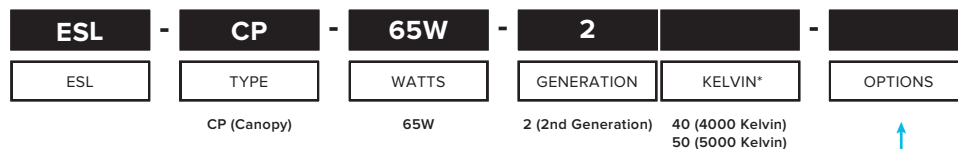

Options (Add as Suffix):

- ESL-4OCC (Occupancy Sensor, 0-10v Dimming, 8'-20' Mounting)
- ESL-REM-101 (Remote control to field program 4OCC Sensor)
- ESL-EMG-AC-18W (External Emergency Backup 1,700 Lumens (Remote Mounted))

* Other kelvin options available upon request