

Key Features & Benefits:

- Ultra slim profile
- Pendant or surface mount
- Single array diode
- Ingress wet rated IP65
- Continuous gasketed seal
- Optical grade polycarbonate lens:
 - UV stabilized
 - Molded prismatic for optimal uniformity
 - Impact resistant
- Limited 10 year warranty
- Environmentally Friendly:
 - No mercury
 - No hazardous substances
 - Reduced energy consumption
- 0-10V Dimming optional
- Die-cast aluminum housing
- (3) 1/2" Threaded conduit on sides
- (1) 3/4" Threaded conduit on back of housing
- DLC 4.0



Project: _____

Date: _____

Catalog #: _____

Notes: _____



Driver Specifications:

Input Power: 70 Watts

Input Voltage: 120-277 VAC

Input Current @ 120: 0.583 Amps

Input Current @ 277: 0.25 Amps

Total Harmonic Distortion (THD):

THD @ 120V: 19%

THD @ 277V: 22%

Light Specifications:

Lumen Output: Up to 5,900 Lumens

Efficacy (lm/W): Up to 83 Lumens

Correlated Color Temperature (CCT): 4000K, 5000K



Color Rendering Index (CRI): >70

Beam Angle: 155-160°

Lens Type: Polycarbonate optical lens

Photocell Compatible: Yes

L70 Lifetime: >50,000 Hours

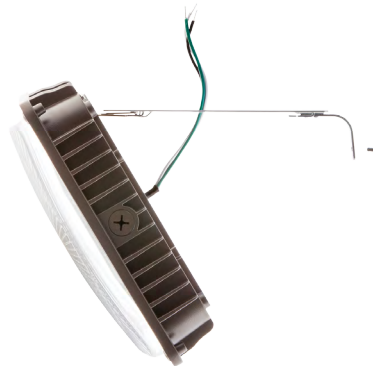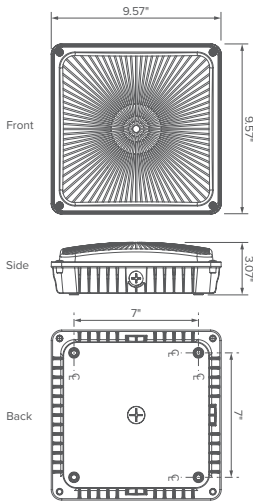

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	CRI	INPUT VOLTAGE	DLC QPL CODE
ESL-CP-70W-140	70W	5700	81	4000K	>70	120-277V	PDX98X34
ESL-CP-70W-150	70W	5900	83	5000K	>70	120-277V	PW7VWMUS

Reference Guide

Example Part Number: **ESL-CP-70W-150**

ESL	-	CP	-	70W	-	1	
ESL		TYPE		WATTS		GENERATION	COLOR
		CP (Canopy)		70W		1 (1st Generation)	40 (4000 Kelvin) 50 (5000 Kelvin)

* Other kelvin options available upon request