

Key Features & Benefits:

Intended Use

The ESL ID 4ft Wrap is economical LED fixture for back end spaces and storage areas. Featuring over 120 lumens per watt, exceptional color rendering, ultra-long life and instant on/off illumination.

Construction

Housing is made from 22 gauge pre-painted steel. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, cable kit and surface mount. Multiple KO's make for extremely easy installation.

Mounting Options

A variety of mounting options are available for surface, pendant, stem or chain hanging. Please contact the factory for additional mounting options.

Project: _____

Date: _____

Catalog #: _____

Notes: _____



Electrical Data:

Light Specifications:

- Lumen Output: Up to 3,450 Lumens
- Efficacy (lm/W): Up to 115 Lumens per Watt
- Kelvin: 3500K, 4000K, 5000K
- Color Rendering Index (CRI): >82
- Rated Life: >50,000 Hours
- Dimensions (LxWxH): 48" x 9.375" x 3.1"

Driver Data:

- Input Voltage: 120-277 VAC
- Input Power: 30W
- Input Current @ 120V: 0.25 Amps
- Input Current @ 240V: 0.125 Amps
- Input Current @ 277V: 0.108 Amps
- Total Harmonic Distortion (THD): <10%
- Power Factor: >0.99
- Operating Temperature: -4 ~ 122°F

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
ESL-ID-EW49-S-30W-F35	30W	3,330	111	3500K
ESL-ID-EW49-S-30W-F40	30W	3,390	113	4000K
ESL-ID-EW49-S-30W-F50	30W	3,450	115	5000K

* Made in the USA option available upon request

Ordering Guide:

ESL	-	ID	-	EW49	-	S	-	30W	-	F	-	
ESL		TYPE		SERIES		CLASS		WATTS		LENS		KELVIN
		ID Series		EW49 (Economy Wrap)		S		30W (30 Watts)		F (Frosted)		35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)
												OPTIONS


Example Part Number: ESL-ID-EW49-S-30W-F35

Options (Add as Suffix):


• **Sensors:**

- ESL-4OCC (Occupancy Sensor, On/Off, 8'-20' Mounting)
- ESL-REM-101 (Hand Held Remote to Program ESL-4OCC)

Dimensions:

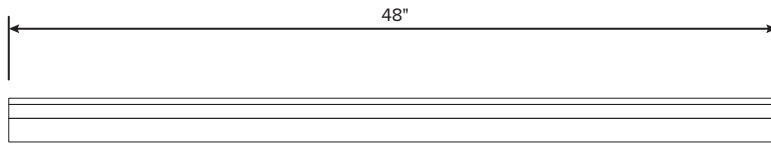

SIDE VIEW

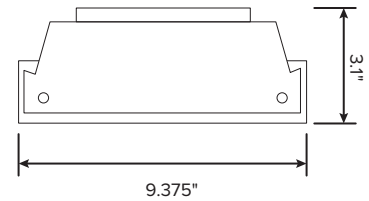

END VIEW