

Key Features & Benefits:

- Installation
 - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
 - Acceptable for use in IC or Non-IC applications
 - Damp location listed
 - Energy Star listed
- Construction
 - Recessed bevel with frosted lens for smooth, even and optimal light distribution
 - Cast aluminum housing and trim
- Rated life > 50,000 hrs

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____



**9 LIGHTS
IN ONE**



IC RATED



KELVIN ADJUSTABLE





WATTAGE ADJUSTABLE



Technical Specifications:

- Power: 10/15/22 Watts
- Lumens: Up to 1,950 Lumens
- Input Voltage: 110-277 VAC
- Power Factor: >0.98
- CRI: 90
- Kelvin: 3000K, 4000K, 5000K
- Input Frequency: 50/60Hz
- Operating Temperature: -13°F to 114°F (-25°C to 45°C)
- Max Mounting Thickness: 5"

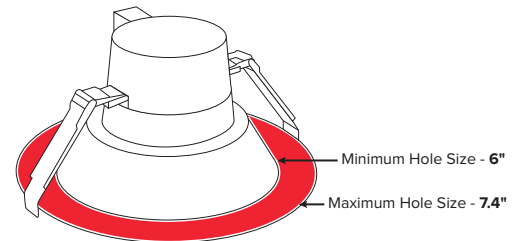

Catalog Data:

ITEM#	WATTS	KELVIN			CRI	ENERGY STAR CERTIFIED
		3000K	4000K	5000K		
ESL-OPT-6-xW-1yy	10W	850	900	900	90	✓
	15W	1,250	1,350	1,350	90	✓
	22W	1,750	1,950	1,950	90	✓

LUMEN OUTPUT

Ordering Guide:

ESL	-	OPT	-	6	-	xW	-	1	yy
ESL		TYPE		SIZE		WATTS		GENERATION	KELVIN
		OPT (Optus Series)		6 (Round 5/6")		xW (10/15/22 Watts)		1 (1st Generation)	yy (30K/40K/50K)