

OCCUPANCY SENSORS

WITH SEVERAL OCCUPANCY SENSORS TO CHOOSE FROM, ESL VISION HAS A SOLUTION FOR YOUR APPLICATION. ESL VISION'S SENSOR LINE-UP RANGES FROM ECONOMIC MODELS WITH ON/OFF CAPABILITIES, TO MODELS WITH 0-10V DIMMING, WET RATED AND REMOTE CONTROL CAPABILITIES.



ESL-10CC-HDO – OCCUPANCY SENSOR

Sensor Type: Passive Infrared (PIR)
 Dimming: On/Off
 Input Voltage: 120-277 VAC
 Mounting Height: Up to 40ft
 Load Requirements:
 @120VAC : 800W
 @277VAC : 1200W
 @120VAC : 1/4hp
 Operating Temperature: -40°F~167°F (-40°C~75°C)
 Humidity: max.95% RH
 Adjustable Time Delay: 10 Sec – 30 Min
 Sensitivity Adjustments: 20%, 50%, 75%, 100%
 Field of View: 360°
 Detection Area (square footage): 2826 ft² (30' Radius@ 40' Height/360°)
 Load Type: LED, Fluorescent, and Incandescent
 Control: Dip Switch Only
 Rated for Wet Locations: No
 Dimensions (LxWxH) 3.2" x 3.2"x 1.7"

ESL-20CC-HDD – OCCUPANCY SENSOR



Sensor Type: Microwave
 Dimming: 0-10V, On/Off
 Input Voltage: 120-277 VAC
 Mounting Height: Up to 50ft
 Load Requirements:
 @120VAC : 800W
 @277VAC : 1200W
 @120VAC : 1/4hp
 Operating Temperature: -40°F~158°F (-40°C~70°C)
 Humidity: max.95% RH
 Adjustable Time Delay: 10 Sec – 60 Min
 Sensitivity Adjustments: 20%, 50%, 75%, 100%
 Field of View: 360°
 Detection Area (square footage): 2826 ft² (30' Radius@ 50' Height/360°)
 Load Type: LED, Fluorescent, and Incandescent
 Control: Dip Switch and Remote
 Rated for Wet Locations: No
 Dimensions (LxWxH) 3.2" x 3.2"x 1.7"



ESL-3OCC & 3OCCB – OCCUPANCY SENSOR

Sensor Type: Microwave
 Dimming: 0-10V, On/Off
 Input Voltage: 120-277 VAC
 Mounting Height: Up to 50ft
 Load Requirements:
 @120VAC : 800W
 @277VAC : 1200W
 @120VAC : 1/4hp
 Operating Temperature: -40°F~158°F (-40°C~70°C)
 Humidity: max.95% RH
 Adjustable Time Delay: 10 Sec – 60 Min
 Sensitivity Adjustments: 20%, 50%, 75%, 100%
 Field of View: 360°
 Detection Area (square footage): 2155 ft² (26.2' Radius@ 50' Height/360°)
 Load Type: LED, Fluorescent, and Incandescent
 Control: Remote Only
 Rated for Wet Locations: Yes
 Dimensions (ØxH) 4.1" x 2.0"



ESL-4OCC-LDD – OCCUPANCY SENSOR

Sensor Type: Microwave
 Dimming: 0-10V, On/Off
 Input Voltage: 120-277 VAC
 Mounting Height: Up to 20ft
 Load Requirements:
 @120VAC : 800W
 @277VAC : 1200W
 @120VAC : 1/4hp
 Operating Temperature: -40°F~158°F (-40°C~70°C)
 Humidity: max.95% RH
 Adjustable Time Delay: 10 Sec – 60 Min
 Sensitivity Adjustments: 20%, 50%, 75%, 100%
 Field of View: 360°
 Detection Area (square footage): 2123 ft² (26' Radius@ 20' Height/360°)
 Load Type: LED, Fluorescent, and Incandescent
 Control: Dip Switch and Remote
 Rated for Wet Locations: No
 Dimensions (LxWxH) 4.17" x 1.61"x 1.46"



ESL-8OCC-ODD-LV – OCCUPANCY SENSOR


Sensor Type: PIR
 Dimming: 0-10V, On/Off
 Input Voltage: 6-24 VDC
 Mounting Height: Up to 40ft
 Operating Temperature: -40°F~167°F (-40°C~75°C)
 Humidity: max.95% RH
 Adjustable Time Delay: 10 Sec – 60 Min
 Sensitivity Adjustments: 20%, 50%, 75%, 100%
 Field of View: 360°
 Detection Area (square footage): 2826 ft² (30' Radius@ 40' Height/360°)
 Load Type: LED, Fluorescent, and Incandescent
 Control: Dip Switch and Remote
 Rated for Wet Locations: Yes*
 Dimensions (ØxH) 2.0" x 1.4"



*when installed on a fixture rated for wet locations per installation instructions

SETTING DIP SWITCH PARAMETERS

THE 10CC, 20CC, 40CC AND 80CC EACH HAVE A PROGRAMMABLE DIP SWITCH TO CUSTOMIZE THE FUNCTIONALITY OF THE FIXTURE. THE REM-100 REMOTE CAN BE USED FOR MORE DETAILED CUSTOMIZATION AND WILL OVERRIDE THE DIP SWITCH.

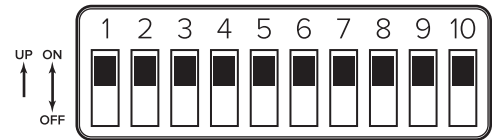

10CC


SENSITIVITY

Determines how reactive the sensor will be to movement. Range and sensitivity will vary based upon the sensor.



HOLD TIME

The duration that the light will remain on without detecting movement before dimming or turning off.



DAYLIGHT SENSOR

Uses the photocell to adjust the LED output in conjunction with the ambient light for consistent lighting regardless of environmental changes.



INFRARED REMOTE


THE **ESL-REM-100 INFRARED REMOTE** offers a variety of programming options for fixtures using occupancy sensors; including motion detection, daylight sensing and timed settings. Settings made with the remote will override the dip switch settings. Use the remote to easily turn fixtures on and off, eliminating the need to wire additional wall switches with new fixtures.



20CC | 40CC | 80CC


SENSITIVITY

Determines how reactive the sensor will be to movement. Range and sensitivity will vary based upon the sensor.




HOLD TIME

The duration that the light will remain on without detecting movement before dimming or turning off.




DAYLIGHT SENSOR

Uses the photocell to adjust the LED output in conjunction with the ambient light for consistent lighting regardless of environmental changes.




STAND-BY DIM

Sets the maximum lumens to be used when there is no activity detected. A setting of 0% will keep the light from dimming.



STAND-BY TIME

Determines how long the light will remain at the dimming level before shutting off completely.



RECEPTACLE USE


MULTIPLE PHOTOCELL AND RECEPTACLE OPTIONS

ESL VISION OFFERS THREE RECEPTACLE OPTIONS:

- 3-PIN FOR SIMPLE ON/OFF CONTROL
- 5-PIN FOR 0-10V DIMMING OPTIONS
- 7-PIN FOR 0-10V DIMMING AND FUTURE PROOFING CAPABILITIES

STANDARD ON/OFF 120-277 VAC AND 347-530 AC PHOTOCELLS AS WELL AS SHORTING CAPS FOR FUTURE EXPANSION ARE AVAILABLE.

NO MATTER WHAT YOUR INSTALLATION AND APPLICATION REQUIREMENTS ARE, ESL VISION HAS A SOLUTION FOR YOUR LIGHTING NEEDS.

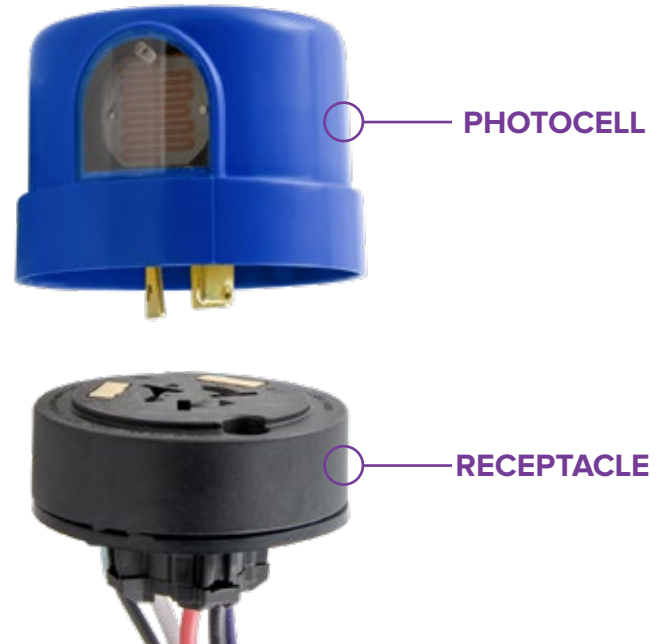

ACCESSORIES

PHOTOCELLS



ESL-PCOF – ON/OFF PHOTOCELL

Working Voltage: 120-277 VAC
 Rated Load: 1000W Tungsten, 1800VA Ballast
 Power Consumption: 0.5W (10 Amp)
 On/Off Level: 16 Lux On / 24 Lux Off
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)
 Related Humidity: 99%
 Dimensions (ØxH): 3.3" x 2.6"
 Weight (lbs): 0.24 lbs



ESL-PCOFHV – ON/OFF PHOTOCELL

Working Voltage: HV - 347-530 VAC
 Rated Load: 1000W Tungsten, 1800VA Ballast
 Power Consumption: 0.9W (20 Amp)
 On/Off Level: 16 Lux On / 24 Lux Off
 Ambient Temperature: -40 ~ 149°F(-40 ~ 65°C)
 Related Humidity: 96%
 Dimensions (ØxH): 2.93" x 1.98"
 Weight (lbs): 0.28 lbs



ESL-WP-PC – BUTTON PHOTOCELL

Power: 2 Watts
 Working Voltage: 120-277 VAC
 Rated Frequency: 50/60Hz
 Rated Load: 500W Tungsten, 850VA Ballast, 5A E-Ballast
 Operating Level: 10~20Lux On, 30~80Lux Off
 Operating Temperature: -40°F ~ 158°F
 Dimensions (LxWxH): 2.14" x 1.14" x 1.73"



WHEN CHOOSING A PHOTOCELL RECEPTACLE IT IS IMPORTANT TO NOTE THE CURRENT AND POTENTIAL APPLICATION OF THE FIXTURE. ESL VISION'S RECEPTACLES PROVIDE A SOLUTION TO MATCH YOUR SPECIFIC DIMMING SCENARIO, WITH AN OPTION THAT EVEN ALLOWS FOR FUTURE TECHNOLOGY TO BE APPLIED.

RECEPTACLE

ESL-RPC3 – 3 PIN TWIST-LOCK RECEPTACLE

Working Voltage: 480 VAC Max
 Load Capacity: 15 Amp Max
 Dimming: On/Off
 Rated Frequency: 50/60Hz
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)
 Lead Gauge: AWG#14
 Lead Length: 12"
 Dimensions (ØxH): 2.56" x 1.18"
 Weight (lbs): 0.185 lbs
 *Comes factory installed when ordered with a fixture



ESL-RPC5 – 5 PIN TWIST-LOCK RECEPTACLE

Working Voltage: 480 VAC Max
 Load Capacity: 15 Amp Max
 Dimming: 0-10V, On/Off
 Rated Frequency: 50/60Hz
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)
 Lead Gauge: AWG#14
 Lead Length: 12"
 Dimensions (ØxH): 2.56" x 1.38"
 Weight (lbs): 0.25 lbs
 *Comes factory installed when ordered with a fixture



ESL-RPC7 – 7 PIN TWIST-LOCK RECEPTACLE

Working Voltage: 480 VAC Max
 Load Capacity: 15 Amp Max
 Dimming: 0-10V, On/Off, Future-proofing
 Rated Frequency: 50/60Hz
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)
 Lead Gauge: AWG#14
 Lead Length: 12"
 Dimensions (ØxH): 2.56" x 1.38"
 Weight (lbs): 0.26 lbs
 *Comes factory installed when ordered with a fixture



CAPS

ESL-PCSC – SHORTING CAP

Working Voltage: 480 VAC Max
 Ambient Temperature: -40 ~ 158°F(-40 ~ 70°C)
 Dimensions (ØxH): 2.9" x 2"
 Weight (lbs): 0.22 lbs





WWW.ESLVISION.COM
888.493.5559

Questions or Comments
www.eslvision.com
customerservice@eslvision.com
ESL Vision, LLC
1136 S 3600 W
Salt Lake City, UT, USA

Catalog#CONTROLS-2018