



OPTUS SERIES
RECESSED FIXTURES

9 LIGHTS
IN ONE





CONSTRUCTION

- Recessed Bevel with Frosted Lens for Smooth, Even, and Optimal Light Distribution
- Cast Aluminum Housing and Trim

SECURE MOUNTING

- Strong Spring Clips Secure Housing to Drywall, Ceiling Tiles, or Downlight Mounting Plate

KEY FEATURES

- Acceptable for Use in IC or Non-IC Applications
- Damp Location Rated
- Energy Star Listed
- Rated life > 50,000 hrs
- Emergency Backup Capable
- 1-10V Dimmable

9 LIGHTS IN ONE



KELVIN SELECTABLE



3000K

4000K

5000K

KELVIN SELECTABLE



6" OPTUS — 10 WATTS — 15 WATTS — 22 WATTS

8" OPTUS — 12 WATTS — 20 WATTS — 30 WATTS

ORDERING GUIDE & SPECS

ESL	-	OPT	-	xxW	-	1	-	yy	-	10V	-			
ESL	-	TYPE	-	SIZE	-	WATTS	-	GENERATION	-	KELVIN	-	DIMMING	-	OPTIONS



OPTIONS (Add as Suffix)

ESL-EMG (Emergency BBU, 25W Output, 25W MAX Input, 90 Min Backup, 120-277 VAC Field) Install



	PRODUCTS	INPUT VOLTAGE	MAX LUMENS	WATTAGE SETTINGS (xxW)	KELVIN SETTINGS (yy)
6'	ESL-OPT-6-xxW-1yy-10V	110-277 VAC	1,950	10W : ● 15W : ● 22W : ●	● 3000K (30) ● 4000K (40) ● 5000K (50)
8'	ESL-OPT-8-xxW-1yy-10V	110-277 VAC	2,250	12W : ● 20W : ● 30W : ●	● 3000K (30) ● 4000K (40) ● 5000K (50)

DIMENSIONS

10 | 15 | 22 WATT

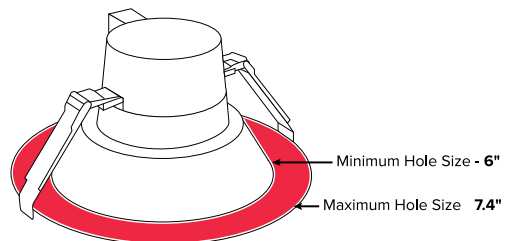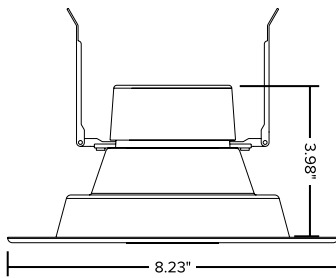

12 | 20 | 30 WATT

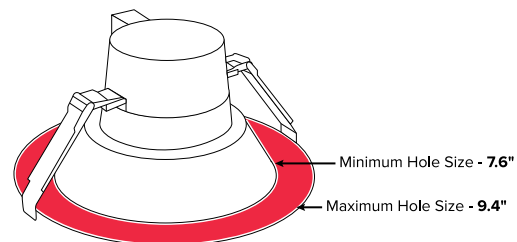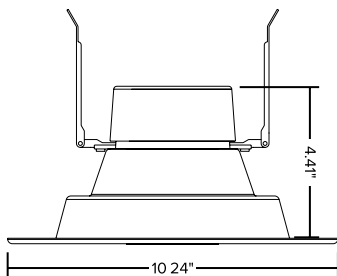

IC RATED



WWW.ESLVISION.COM

888.493.5559

Headquarters
1136 S 3600 W
Salt Lake City, UT, USA

Atlanta
6371 Corley Road
Norcross, GA, USA