

Key Features & Benefits:

- Ultra-thin Profile
- MV Models are 120-277 VAC with 1-10v Dimming
- IC Rated
- Kelvin Adjustability - 3000K, 4000K or 5000K
- Simple, Quick Connect Installation to Provided J-box
- Field Installable Bezel Finishes:
 - Black, oil rubbed bronze, copper and brushed nickel

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____



**KELVIN
TUNEABLE**
3000K • 4000K • 5000K



Technical Data:

Power: 14 Watts
 Lumen Output: Up to 1,000 Lumens
 Kelvin: 3000K, 4000K, 5000K
 CRI: >80
 THD: 15%
 Power Factor: >0.9
 Rated Life (hrs): 50,000
 Beam Angle: 120°

- 120V
 Input Voltage: 120 VAC
 Dimming: Triac Dimmable
- MV (120-277V)
 Input Voltage: 120-277 VAC
 Dimming: 1-10v Dimmable



Ordering Guide:

ESL	-	WFR	-	6	-	14W	-	1	KA	-	120V	-	1
ESL		TYPE		SIZE		WATTS		GENERATION	KELVIN		VOLTAGE		OPTIONS
		WFR		6 (6 inch)		14W		1 (1st Generation)	KA (Kelvin Adjustable)		120V (120 VAC Only) MV (120-277 VAC)		


Options & Accessories

ESL-EMG-1AC-16W (AC Emergency, 16W Output, 16W MAX Input, 170 VDC, 90 min backup, 120-277 VAC, Field & Factory Listed)
ESL-WFR-6-TBK (6" Field Installable Black Trim Kit)
ESL-WFR-6-TBZ (6" Field Installable Oil Rubbed Bronze Trim Kit)
ESL-WFR-6-TBN (6" Field Installable Brush Nickel Trim Kit)
ESL-WFR-6-TCP (6" Field Installable Copper Trim Kit)

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	ADJUSTABLE KELVIN	INPUT VOLTAGE
ESL-WFR-6-14W-1KA-120V	14W	1,000	3000K - 4000K - 5000K	120 VAC
ESL-WFR-6-14W-1KA-MV	14W	1,000	3000K - 4000K - 5000K	120-277 VAC

Product Dimensions:

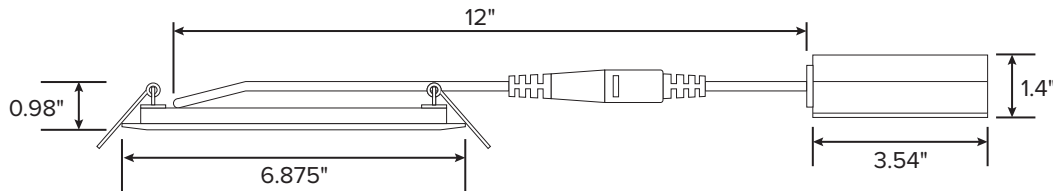

Installation:

