

Key Features & Benefits:


- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- Wide Beam Angle
- Integral Driver (Isolated)



Technical Specifications:



Input Voltage: 120-277 VAC
 Lumen Output: Up to 1,868 Lumens
 Efficacy (lm/W): Up to 129 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >80
 Material: Glass
 Power Factor: >0.9
 Rated Life (hrs): 50,000 Hours
 Base Type: G13
 Operating Temperature: -4°F – 113°F
 Tube Dimensions (ØxL): 1" x 47.75"
 Tube Weight (lbs): 0.4 Pounds

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____






GDT Wiring:

Before Upgrade:

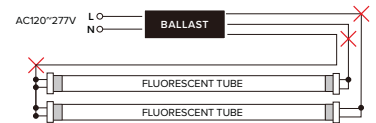

After Upgrade:

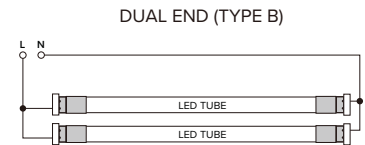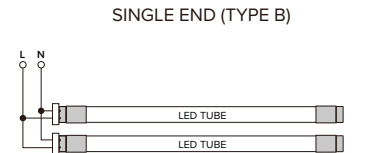

Ordering Guide:

ESL	-	T8	-	GDT	-	12W	-	F	3	
ESL		T8		TYPE		WATTS		LENS	GENERATION	KELVIN
		T8 Tube		Glass Dual-Mode Tube 4 Foot		12W (12 Watts)		F (Frosted)	3 (3rd Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

Catalog Data:

ITEM#	KELVIN	WATTS	LUMEN OUTPUT	(lm/W)	DLC QPL CODE
ESL-T8-GDT-12W-F330	3000K	12W	1,811	127	PHLWXC1G
ESL-T8-GDT-12W-F335	3500K	12W	1,829	129	PL5QOMRB
ESL-T8-GDT-12W-F340	4000K	12W	1,858	129	PWI9LV6M
ESL-T8-GDT-12W-F350	5000K	12W	1,868	129	PK66B5YA