



# CANOPY SERIES

OUTDOOR FIXTURE



## KEY FEATURES & BENEFITS

### ELECTRICAL

- Universal Voltage 120-277 VAC
- 1-10V Dimming Class 2 Driver
- 27, 40 and 60 Watt Options
- 100,000 Hour LED Lifespan
- High Efficiency COB LEDs Provide up to 8,062 Lumens

### CONSTRUCTION

- Ultra-Slim Low Profile Design
- Rugged, Die-Cast Housing
- Polyester Powder Coat Finish (Bronze Standard\*)
- High-Temperature Silicone Gaskets to Ensure Wet Location Standards
- IP65 Rated



### OPTICS

- Precision Optics Provides Optimum Light Distribution
- Reduces “Cave Effect”
- Shatter and Impact Resistant Polycarbonate Lens
- UV Stabilized
- 4000K and 5000K Options




### OPTIONS

- Photocell and Occupancy Capable
  - Vandal proof – located inside the fixture
  - Programmable – use remote to control dimming and time delay
- External Emergency Backup Available

### INSTALLATION

- Easy Installation Mounting Plate for Surface Mount Installations
- 3/4” Hole for Pendant/J-Box or Surface Mount Installations
- 1/2” Knockouts for Conduit Installations

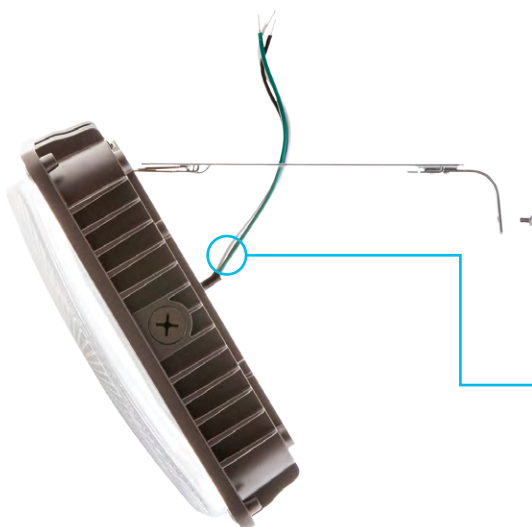



PRODUCT OVERVIEW

<b>ESL</b>	<b>CP</b>		<b>3</b>	<b>(xx)</b>			<b>D</b>	
ESL	SERIES	WATTAGE	GENERATION	KELVIN	FINISH	SENSOR	DIMMING	EMERGENCY
	CP (Canopy)	27W (27 Watts) 40W (40 Watts) 60W (60 Watts)	3 (3rd Generation)	40 (4000 Kelvin) 50 (5000 Kelvin)	BZ (Bronze)	Blank (No Sensor) OCC (Occupancy)	D (1-10V)	Blank (No EMG) EMG (Emergency)

Options & Accessories

SENSOR:

ESL-4OCC-HDD (Occupancy Sensor, 8'-20' Mounting, 27W & 40W Only)

ESL-REM-100 (Hand Held Remote to Control ESL-4OCC-HDD)

EMERGENCY BBU:

ESL-EMG-5DC-10W (External Emergency Backup)



ESL-4OCC-HDD



ESL-EMG-5DC-10W

	SERIES	PART NUMBER	MAX LM/W	MAX LUMENS PER WATT	AVAILABLE KELVIN (xx)	INPUT VOLTAGE	DIMENSIONS
<b>27</b> WATT	Canopy	ESL-CP-27W-3xx-BZ	3,800	141	4000K (40) 5000K (50)	120-277 VAC	9.52"x9.52"x3.19"
<b>40</b> WATT	Canopy	ESL-CP-40W-3xx-BZ	5,450	136	4000K (40) 5000K (50)	120-277 VAC	9.52"x9.52"x3.19"
<b>60</b> WATT	Canopy	ESL-CP-60W-3xx-BZ	8,062	134	4000K (40) 5000K (50)	120-277 VAC	9.52"x9.52"x3.19"



\*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).





**WWW.ESLVISION.COM**

**888.493.5559**

Headquarters  
1136 S 3600 W  
Salt Lake City, UT, USA

Atlanta  
6371 Corley Road  
Norcross, GA, USA