

Key Features & Benefits:

- Installation
 - All in one junction box enables extremely quick installation
 - Can accept BX cable (metal clad wiring) or NM (Romex) wiring
 - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
 - Acceptable for use in IC or Non-IC applications
 - ETL wet location listed
 - Energy Star listed
- Construction
 - Recessed bevel with frosted lens for smooth, even and optimal light distribution
 - Cast aluminum housing and trim
 - 90+ CRI
- Electrical
 - 0-10v Dimmable
 - 120-277 VAC
 - Rated life > 50,000 hrs
- Options
 - 4, 5/6, and 8 inch can replacements available
 - Round and square trim kits available
 - External emergency back-up available (ESL-EMG-AC-18W)



Project: _____


Date: _____

Catalog #: _____

Notes: _____



IC RATED

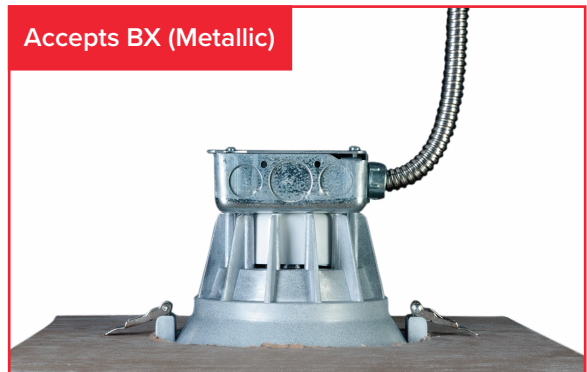

Technical Specifications:

- Power: 25 Watts
- Input Voltage: 120-277 VAC
- Power Factor: >0.98
- CRI: 90+
- Lumens: Up to 1,800 Lumens
- Input Frequency: 50/60Hz
- Operating Temperature: -13°F to 114°F (-25°C to 45°C)
- Control: 0-10v Dimmable




Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	CRI	ENERGY STAR CERTIFIED
ESL-CCR-R8-25W-130-10V	25W	1,700	68	3000K	90+	✓
ESL-CCR-R8-25W-135-10V	25W	1,700	68	3500K	90+	✓
ESL-CCR-R8-25W-140-10V	25W	1,740	69	4000K	90+	✓
ESL-CCR-R8-25W-150-10V	25W	1,800	72	5000K	90+	✓

Ordering Guide:

Example Part Number: ESL-CCR-R8-10W-130-10V

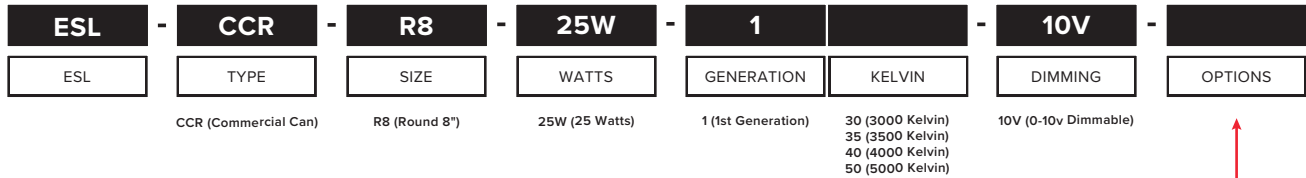

Options (Add as Suffix):

ESL-EMG-AC-18W (External Emergency Backup)

Dimensions:

