

Key Features & Benefits:

- Listed for Field and Factory Installation
- Intelligent Emergency Auto Detection Function
- 13-60VDC for Wide Range of LED Loads
- UL 924 and Tested to CSA C.22.2 No. 141 Emergency Lighting Compliant
- Meets CEC Title 20 (California Energy Commission) Efficiency Standards
- Test Switch Indicator: 2W - ITS (2-Wire Illumination Test Switch)
- RoHS Compliant

Project: _____

Date: _____

Catalog #: _____

Notes: _____




Technical Specifications:

ESL-EMG-5DC-xxW		10 Watts	15 Watts	20 Watts
Input	Rated Current - AC	100mA Max.	100mA Max.	100mA Max.
	Rated Power - AC	7W Max.	7W Max.	7W Max.
	Rated Voltage	100 - 277 VAC, 50 - 60Hz	100 - 277 VAC, 50 - 60Hz	100 - 277 VAC, 50 - 60Hz
Output	Emergency Output Power	10W	15W	20W
	Output Voltage	25-48 VDC	25-48 VDC	25-48 VDC
	Output Current	200-400mA	310-600mA	410-800mA
Emergency	Emergency Operation	≥90 Minutes		
	Charging Time	24 Hours		
	Charging Current	250mA		
	Power Factor	≥0.50		
Environment	Operating Temperature	32°F - 122°F 0°C - 50°C		
	Case Tc	Max. 158°F (70°C)		
	Weight	0.73 lbs	0.84 lbs	1.2 lbs



Dimensions:

EMG-5DC:

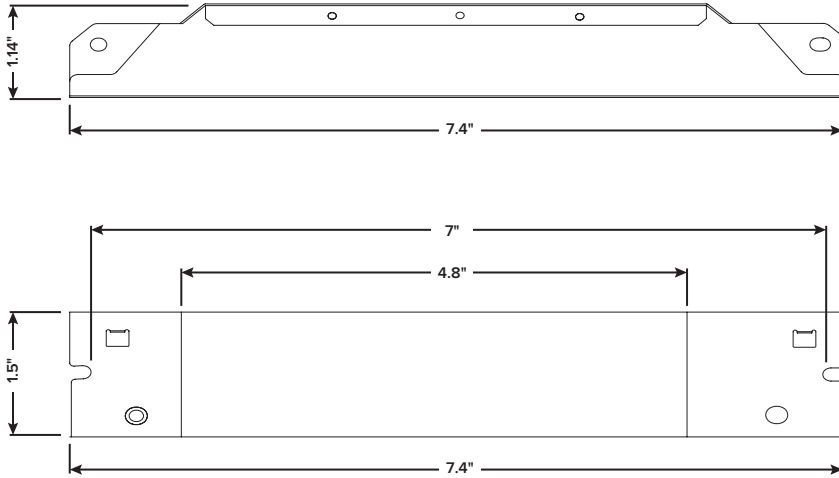

Typical Wiring Diagram:

