

Key Features & Benefits:

- Installation
 - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
 - Acceptable for use in IC or Non-IC applications
 - Wet location rated
 - Energy Star listed
- Construction
 - Recessed bevel with frosted lens for smooth, even and optimal light distribution
 - Cast aluminum housing and trim
- Rated life > 50,000 hrs

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____



**9 LIGHTS
IN ONE**



IC RATED

KELVIN ADJUSTABLE





WATTAGE ADJUSTABLE



8" OPTUS — 12 WATTS — 20 WATTS — 30 WATTS

Technical Specifications:

Power: 12/20/30 Watts
 Lumens: Up to 2,300 Lumens
 Input Voltage: 110-277 VAC
 Power Factor: >0.98
 CRI: 90
 Kelvin: 3000K, 4000K, 5000K
 Input Frequency: 50/60Hz
 Operating Temperature: -13°F to 114°F (-25°C to 45°C)
 Max Mounting Thickness: 5"

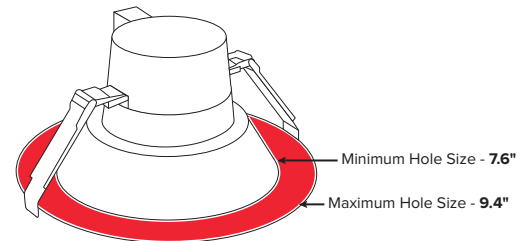

Catalog Data:

ITEM#	WATTS	KELVIN			CRI	ENERGY STAR CERTIFIED
		3000K	4000K	5000K		
ESL-OPT-8-xW-1yy	12W	900	1,000	1,050	90	✓
	20W	1,500	1,600	1,650	90	✓
	30W	2,100	2,250	2,300	90	✓

LUMEN OUTPUT

Ordering Guide:

