

### Key Features & Benefits:


- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction
- Wide Beam Angle
- Integral Driver (Isolated)



### Technical Specifications:



Input Voltage: 120-277 VAC  
 Lumen Output: Up to 1,869 Lumens  
 Efficacy (lm/W): Up to 130 Lumens per Watt  
 Kelvin: 3000K, 3500K, 4000K, 5000K  
 Color Rendering Index (CRI): >80  
 Material: Glass  
 Power Factor: >0.9  
 Rated Life (hrs): 50,000 Hours  
 Base Type: G13  
 Operating Temperature: -4°F – 113°F  
 Tube Dimensions (ØxL): 1" x 47.75"  
 Tube Weight (lbs): 0.4 Pounds

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_




### GDT Wiring:

#### Before Upgrade:

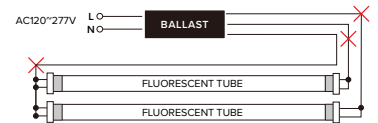


#### After Upgrade:


##### BALLAST COMPATIBLE (TYPE A)



##### SINGLE END (TYPE B)



##### DUAL END (TYPE B)



### Ordering Guide:

<b>ESL</b>	-	<b>T8</b>	-	<b>GDT</b>	-	<b>12W</b>	-	<b>F</b>	<b>3</b>	
ESL		T8		TYPE		WATTS		LENS	GENERATION	KELVIN
		T8 Tube		Glass Dual-Mode Tube 4 Foot		12W (12 Watts)		F (Frosted)	3 (3rd Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

**Catalog Data:**

ITEM#	KELVIN	WATTS	LUMEN OUTPUT	(lm/W)	DLC QPL CODE
ESL-T8-GDT-12W-F330	3000K	12W	1,817	128	PHLWXC1G
ESL-T8-GDT-12W-F335	3500K	12W	1,830	129	PL5QOMRB
ESL-T8-GDT-12W-F340	4000K	12W	1,858	130	PWI9LV6M
ESL-T8-GDT-12W-F350	5000K	12W	1,869	130	PK66B5YA