

Key Features & Benefits:

- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- Wide Beam Angle
- Integral Driver (Isolated)





Key Features & Benefits:

- Input Voltage: 120–277 VAC
- Lumen Output: Up to 1,850 Lumens
- Efficacy (lm/W): Up to 152 Lumens per Watt
- Kelvin: 3000K, 3500K, 4000K, 5000K
- Color Rendering Index (CRI): >80
- Material: Glass
- Power Factor: >0.9
- Rated Life (hrs): 50,000 Hours
- Base Type: G13
- Operating Temperature: -4°F – 113°F
- Tube Dimensions (ØxL): 1" x 23.74"
- Tube Weight (lbs): 0.25 Pounds



Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

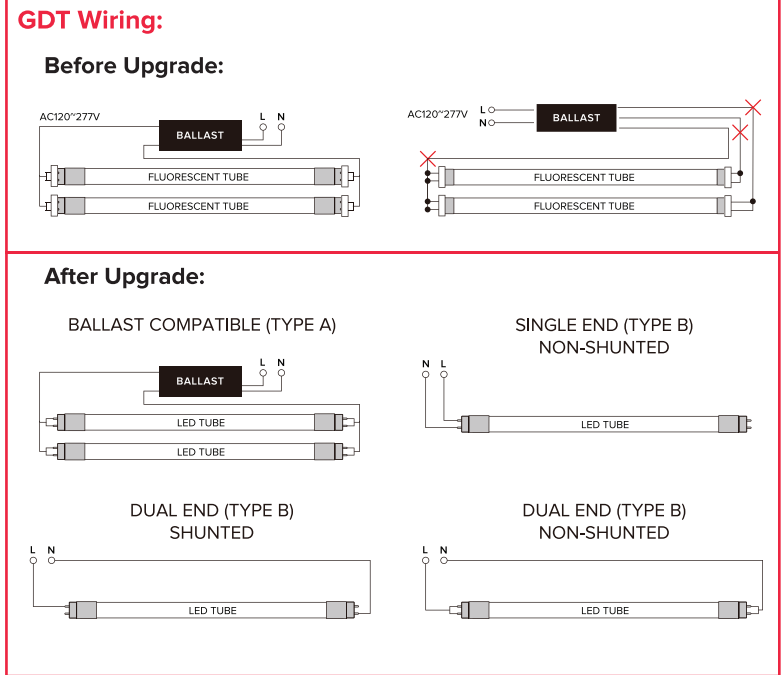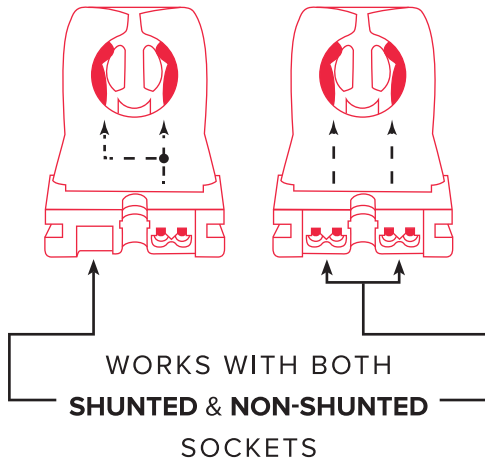

Ordering Guide:

ESL	-	T8	-	GDT2	-	10W	-	F	-	3	-	
ESL	-	T8	-	TYPE	-	WATTS	-	LENS	-	GENERATION	-	KELVIN
		T8 Tube		Glass Dual-Mode Tube 2 Foot		10W (10 Watts)		F (Frosted)		3 (3rd Generation)		30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

Catalog Data:

ITEM#	LINE VOLTAGE				0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
	KELVIN	WATTS	LUMEN OUTPUT	(LM/W)	WATTS	LUMEN OUTPUT	(LM/W)	WATTS	LUMEN OUTPUT	(LM/W)	WATTS	LUMEN OUTPUT	(LM/W)
ESL-T8-GDT2-10W-F330	3000K	9.8W	1,400	142	8.8W	1,100	125	10.4W	1,305	126	14.4W	1,760	122
ESL-T8-GDT2-10W-F335	3500K	9.8W	1,480	151	8.8W	1,130	128	10.4W	1,340	127	14.4W	1,820	126
ESL-T8-GDT2-10W-F340	4000K	9.8W	1,480	151	8.8W	1,150	130	10.4W	1,340	125	14.4W	1,820	126
ESL-T8-GDT2-10W-F350	5000K	9.8W	1,490	152	8.8W	1,150	130	10.4W	1,345	126	14.4W	1,850	128

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

ITEM#	KELVIN	DLC QPL CODE
ESL-T8-GDT2-10W-F330	3000K	PL5E2951AJZW
ESL-T8-GDT2-10W-F335	3500K	PL2SJY3VO82R
ESL-T8-GDT2-10W-F340	4000K	PLVA4O3WDY7D
ESL-T8-GDT2-10W-F350	5000K	PLSOPSFIMCXO

