

Key Features & Benefits:

- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- Wide Beam Angle
- Integral Driver (Isolated)




Technical Specifications:

- Input Voltage: 120-277 VAC
- Lumen Output: Up to 1,545 Lumens
- Efficacy (lm/W): Up to 155 Lumens per Watt
- Kelvin: 3000K, 3500K, 4000K, 5000K
- Color Rendering Index (CRI): >80
- Material: Glass
- Power Factor: >0.9
- Rated Life (hrs): 50,000 Hours
- Base Type: G13
- Operating Temperature: -4°F – 113°F
- Tube Dimensions (ØxL): 1" x 23.74"
- Tube Weight (lbs): 0.25 Pounds




Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

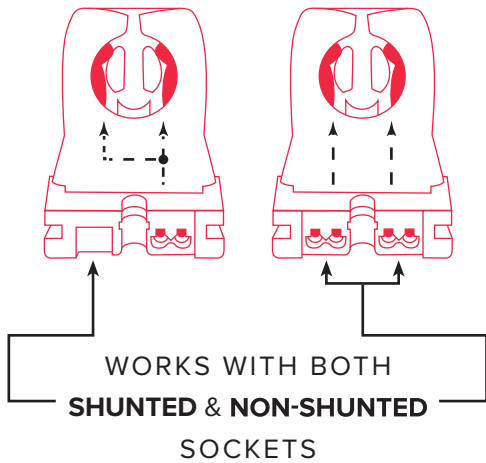


GDT Wiring:

Before Upgrade:



After Upgrade:

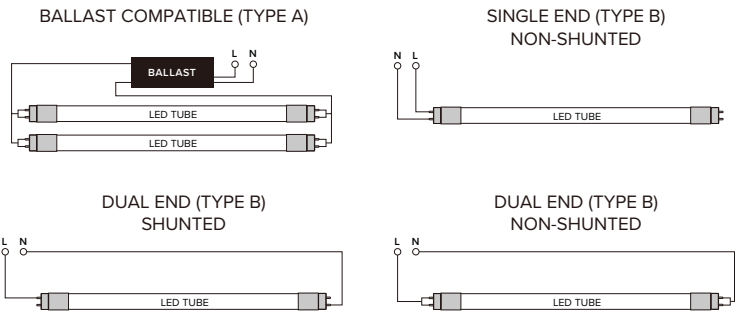

Ordering Guide:

ESL	-	T8	-	GDT2	-	10W	-	F	3	
ESL		T8		TYPE		WATTS		LENS	GENERATION	KELVIN
		T8 Tube		Glass Dual-Mode Tube 2 Foot		10W (10 Watts)		F (Frosted)	3 (3rd Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

Catalog Data:

ITEM#	KELVIN	LINE VOLTAGE			0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
		WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)
ESL-T8-GDT2-10W-F330	3000K	9.9W	1,530	155	12.4W	1,473	118	10.6W	1,326	126	12.5W	1,448	116
ESL-T8-GDT2-10W-F335	3500K	10.0W	1,536	154	12.5W	1,494	120	10.5W	1,329	127	12.6W	1,451	115
ESL-T8-GDT2-10W-F340	4000K	10.0W	1,540	154	12.5W	1,472	117	10.6W	1,328	125	12.6W	1,442	115
ESL-T8-GDT2-10W-F350	5000K	10.1W	1,545	153	12.5W	1,529	123	10.6W	1,330	126	12.6W	1,441	115

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

ITEM#	KELVIN	DLC QPL CODE
ESL-T8-GDT2-10W-F330	3000K	PMEIPRNK
ESL-T8-GDT2-10W-F335	3500K	P97JJUB7
ESL-T8-GDT2-10W-F340	4000K	P5IPO29P
ESL-T8-GDT2-10W-F350	5000K	PERZTYH9

