



LED 4' STRIP RETROFIT SERIES



Ti - 4SRK - 30 Watts

PAGE 1 OF 3

Key Features & Benefits:

- Extremely Quick installation
 - No Rewiring Necessary
 - No Tombstones
 - Quick Connect Technology
- Available in 4' and 8' Lengths
 - 72 Available Configurations
 - 1,721 to 15,120 Lumens
 - 3000K, 3500K, 4000K, and 5000K Available in Ti Series
 - 4000K and 5000K Available in TiHO Series

Project: _____

Date: _____

Catalog #: _____

Notes: _____



Technical Data:

Light Specifications:

Total Kit Lumens: Up to 3,878 Lumens
 Efficacy (lm/W): Up to 138 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >82
 Rated Life: > 80,000 hrs

Driver Data:

Input Voltage: 120-277 VAC
 Driver Output: Dual Output
 Output Power: 30W Watts
 Input Current @ 120V: 0.25 Amps
 Input Current @ 240V: 0.125 Amps
 Input Current @ 277V: 0.1083 Amps
 Total Harmonic Distortion (THD): < 10%
 Operating Temperature: -4 ~ 122°F

Catalog Data:

| ITEM# | WATTS | TOTAL KIT LUMENS | EFFICACY (lm/W) | KELVIN |
|--------------------------|-------|------------------|-----------------|--------|
| ESL-Ti-4SRK-S-30W-2L-F30 | 30W | 3,819 | 136 | 3000K |
| ESL-Ti-4SRK-S-30W-2L-F35 | 30W | 3,819 | 136 | 3500K |
| ESL-Ti-4SRK-S-30W-2L-F40 | 30W | 3,848 | 137 | 4000K |
| ESL-Ti-4SRK-S-30W-2L-F50 | 30W | 3,878 | 138 | 5000K |

* Made in the USA option available upon request

Copyright © 2023 ESL Vision, LLC. All rights reserved. Rev: 07/12/2023

888.493.5559

info@eslvision.com

www.eslvision.com

Ordering Guide:

| | | | | | | | | | | | | | | | | |
|------------|---|-----------|---|--------------------------|---|----------|---|--|---|-------------|---|-------------|---|--|---|---------|
| ESL | - | Ti | - | 4SRK | - | S | - | 30W | - | 2L | - | F | - | | - | |
| ESL | | TYPE | | SERIES | | CLASS | | WATTS | | Ti | | LENS | | KELVIN | | OPTIONS |
| | | Ti Series | | 4SRK (4' Strip Retrofit) | | S | | 26W (26 Watts) 30W (30 Watts) 36W (36 Watts) 44W (44 Watts) | | 2L (Two Ti) | | F (Frosted) | | 30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin) | | |

Alternate 4' Ti Strip Kit Options:



1L Output


What's Included:

- (2) LED Ti Bar
- (1) LED Driver
- (4) Ti Clips
- (1) Strip Retrofit Plate
- (1) UL1598C Certification Label

Options (Add as Suffix):

- ESL-EMG-FDC-9.5W (Internal Emergency Backup 1,100 Lumens)
- ESL-4OCC (Occupancy Sensor, 0-10v Dimming, 8'-20' Mounting)
- ESL-REM-101 (Hand Held Remote to Program ESL-4OCC)

Dimensions:

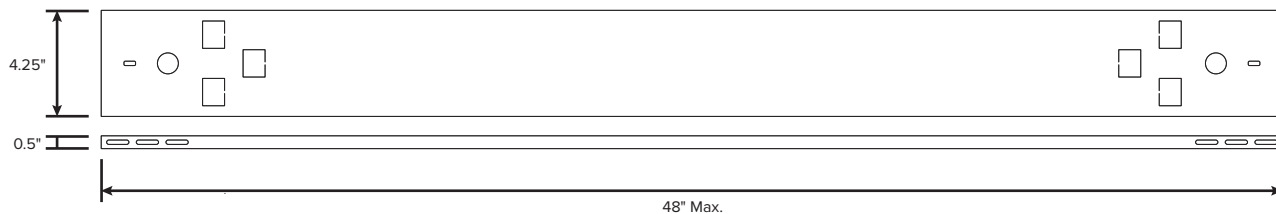



LED 4' STRIP RETROFIT SERIES



Alternative Kit Options

4' Strip Retrofit Kit 4SRK SERIES

| SINGLE OUTPUT | SERIES | PART NUMBER | WATTS | (lm/W)* | KIT LUMENS* |
|---------------|-----------|----------------------------|-------|---------|-------------|
| | TI 4SRK | ESL-Ti-4SRK-S-13W-1L-FXX | 13 | 146 | 1,747 |
| | TI 4SRK | ESL-Ti-4SRK-S-15W-1L-FXX | 15 | 142 | 2,084 |
| | TI 4SRK | ESL-Ti-4SRK-S-18W-1L-FXX | 18 | 142 | 2,467 |
| | TI 4SRK | ESL-Ti-4SRK-S-22W-1L-FXX | 22 | 138 | 2,915 |
| | TiHO 4SRK | ESL-TiHO-4SRK-S-30W-1L-FYY | 30 | 143 | 4,000 |

| DUAL OUTPUT | SERIES | PART NUMBER | WATTS | (lm/W)* | KIT LUMENS* |
|-------------|-----------|----------------------------|-------|---------|-------------|
| | TI 4SRK | ESL-Ti-4SRK-S-26W-2L-FXX | 26 | 143 | 3,531 |
| | TI 4SRK | ESL-Ti-4SRK-S-30W-2L-FXX | 30 | 138 | 3,878 |
| | TI 4SRK | ESL-Ti-4SRK-S-36W-2L-FXX | 36 | 138 | 4,513 |
| | TI 4SRK | ESL-Ti-4SRK-S-44W-2L-FXX | 44 | 133 | 5,725 |
| | TiHO 4SRK | ESL-TiHO-4SRK-S-60W-2L-FYY | 60 | 139 | 8,309 |

8' Strip Retrofit Kit 8SRK SERIES

| DUAL OUTPUT | SERIES | PART NUMBER | WATTS | (lm/W)* | KIT LUMENS* |
|-------------|-----------|----------------------------|-------|---------|-------------|
| | TI 8SRK | ESL-Ti-8SRK-S-26W-2L-FXX | 26 | 146 | 3,509 |
| | TI 8SRK | ESL-Ti-8SRK-S-30W-2L-FXX | 30 | 142 | 3,984 |
| | TI 8SRK | ESL-Ti-8SRK-S-36W-2L-FXX | 36 | 142 | 4,636 |
| | TI 8SRK | ESL-Ti-8SRK-S-44W-2L-FXX | 44 | 138 | 5,948 |
| | TiHO 8SRK | ESL-TiHO-8SRK-S-60W-2L-FYY | 60 | 143 | 8,525 |

| QUAD OUTPUT | SERIES | PART NUMBER | WATTS | (lm/W)* | KIT LUMENS* |
|-------------|-----------|-----------------------------|-------|---------|-------------|
| | TI 8SRK | ESL-Ti-8SRK-S-52W-4L-FXX | 52 | 143 | 6,790 |
| | TI 8SRK | ESL-Ti-8SRK-S-60W-4L-FXX | 60 | 138 | 8,476 |
| | TI 8SRK | ESL-Ti-8SRK-S-72W-4L-FXX | 72 | 138 | 9,661 |
| | TI 8SRK | ESL-Ti-8SRK-S-88W-4L-FXX | 88 | 133 | 11,552 |
| | TiHO 8SRK | ESL-TiHO-8SRK-S-120W-4L-FYY | 120 | 138 | 16,899 |

* At 5000K. See spec sheets for other kelvins
 XX = 30, 35, 40, or 50 for kelvin
 YY = 40 or 50 for kelvin

