

### Key Features & Benefits:

#### Intended Use

The ESL Ti Economy Wrap Series is a shallow economy designed wrap around fluorescent luminaire available in two or four foot lengths. Low initial cost and maintenance free. This series also delivers excellent brightness control.

#### Construction

Completely die formed from heavy gauge cold rolled steel. Design embossed ends are locked and secures to the housing. Wireway cover snaps on or off without tools.

#### Mounting Options

Suitable for individual or continuous run installations. May be surface or pendant mounted.

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_



### Light Specifications:

- Lumen Output: Up to 2,990 Lumens
- Efficacy (lm/W): Up to 115 Lumens per Watt
- Kelvin: 3000K, 3500K, 4000K, 5000K
- Color Rendering Index (CRI): >82
- Rated Life: >80,000 Hours
- Dimensions (LxWxH): 48" x 7.625" x 3"

### Driver Data:

- Input Voltage: 120-277 VAC
- Input Power: 26W
- Input Current @ 120V: 0.22 Amps
- Input Current @ 240V: 0.11 Amps
- Input Current @ 277V: 0.094 Amps
- Total Harmonic Distortion (THD): <10%
- Power Factor: >0.99
- Operating Temperature: -4 ~ 122°F

### Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
ESL-TI-EW47-S-26W-F30	26W	2,600	100	3000K
ESL-TI-EW47-S-26W-F35	26W	2,730	105	3500K
ESL-TI-EW47-S-26W-F40	26W	2,860	110	4000K
ESL-TI-EW47-S-26W-F50	26W	2,990	115	5000K

\* Made in the USA option available upon request

### Ordering Guide:

<b>ESL</b>	-	<b>Ti</b>	-	<b>EW47</b>	-	<b>S</b>	-	<b>26W</b>	-	<b>F</b>	-		-	
ESL		TYPE		SERIES		LISTING		WATTS		LENS		KELVIN		OPTIONS
		Ti Series		EW47 (Economy Wrap)		S		26W (26 Watts) 30W (30 Watts) 36W (36 Watts) 44W (44 Watts)		F (Frosted)		30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)		


Example Part Number: ESL-TI-EW47-S-26W-F30

### Options (Add as Suffix):


- **Emergency:**
  - ESL-EMG-FDC-9.5W (Internal emergency backup, 1,100 Lumens)
- **Sensors:**
  - ESL-4OCC (Microwave Occupancy Sensor)
  - ESL-4OPH (Photocell)
  - ESL-4OCP (Photocell & Microwave Occupancy Sensor)
  - ESL-REM-101 (Handheld remote to program 2OCC, 4OCC and 5OCC)
- **Cord Sets:\***
  - ESL-CS3W-6 (Cord Set, White, 3 wire, 6 foot)
  - ESL-CS3W-6P (Cord Set, White, 3 wire, 6 foot, Standard Plug)
  - ESL-CS3W-12 (Cord Set, White, 3 wire, 12 foot)
  - ESL-CS3W-12P (Cord Set, White, 3 wire, 12 foot, Standard Plug)
- **Mounting:**
  - ESL-HB-PM01 (Pendant Mounting)

\*Other lengths and black cord available upon request

### Dimensions:

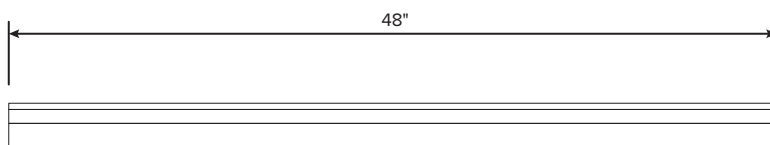

SIDE VIEW

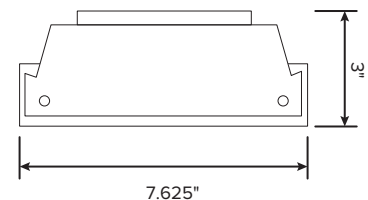

END VIEW