



WAFER SERIES

WFR SERIES — INDOOR/OUTDOOR LED FIXTURES



5 LIGHTS IN ONE



KELVIN
SELECTABLE
2700K • 3000K • 3500K
4000K • 5000K



KEY FEATURES

- Shallow Construction at 1.5"
- Wet Location, IC and Airtight Rated
- Title 24 and Ja8 Compliant
- 120 VAC – TRIAC Dimmable

EASY INSTALLATION

- Quick Connect Installation to Junction Box
- Knockouts on Both Sides for Easy Wiring

EASY INSTALLATION

- 4" Available at 10 Watts – 650 Lumens
- 6" Available at 15 Watts – 1,100 Lumens
- Emergency Back Up Capable



EASY INSTALLATION


- Field Installable Bezel Finishes
 - Black
 - Rubbed Bronze
 - Copper
 - Brushed Nickel

ORDERING GUIDE & SPECS

ESL	-	WFR	-	S	-	(yy)W	-	2	-	22750
ESL	-	TYPE	-	SIZE	-	WATTS	-	GENERATION	-	KELVIN SELECTABLE

	PRODUCTS	SIZE (s)	WATTAGE (yy)	KELVIN	LUMEN OUTPUT	CRI	INPUT VOLTAGE
4 INCH	ESL-WFR-4-10W-22750	4 Inch	10 Watts	2700K 3000K 3500K 4000K 5000K	650	>90	120 VAC
6 INCH	ESL-WFR-6-15W-22750	6 Inch	15 Watts	2700K 3000K 3500K 4000K 5000K	1,100	>90	120 VAC

DIMENSIONS

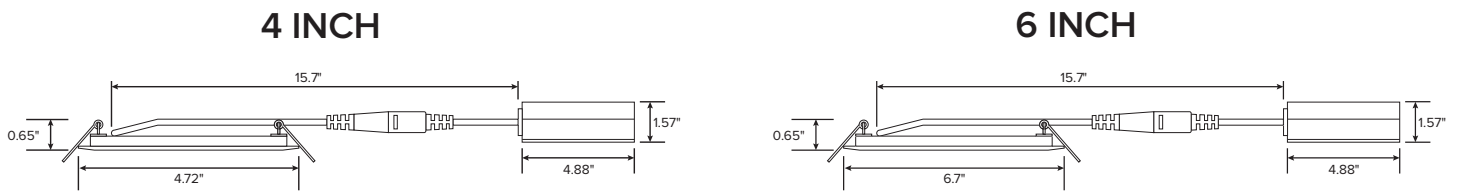



WWW.ESLVISION.COM

888.493.5559

Headquarters

1136 S 3600 W
Salt Lake City, UT, USA

Atlanta

6371 Corley Road
Norcross, GA, USA

Questions or Comments

www.eslvision.com
customerservice@eslvision.com

Catalog#WFR_2108