




WALL PACK SERIES

OUTDOOR FIXTURE



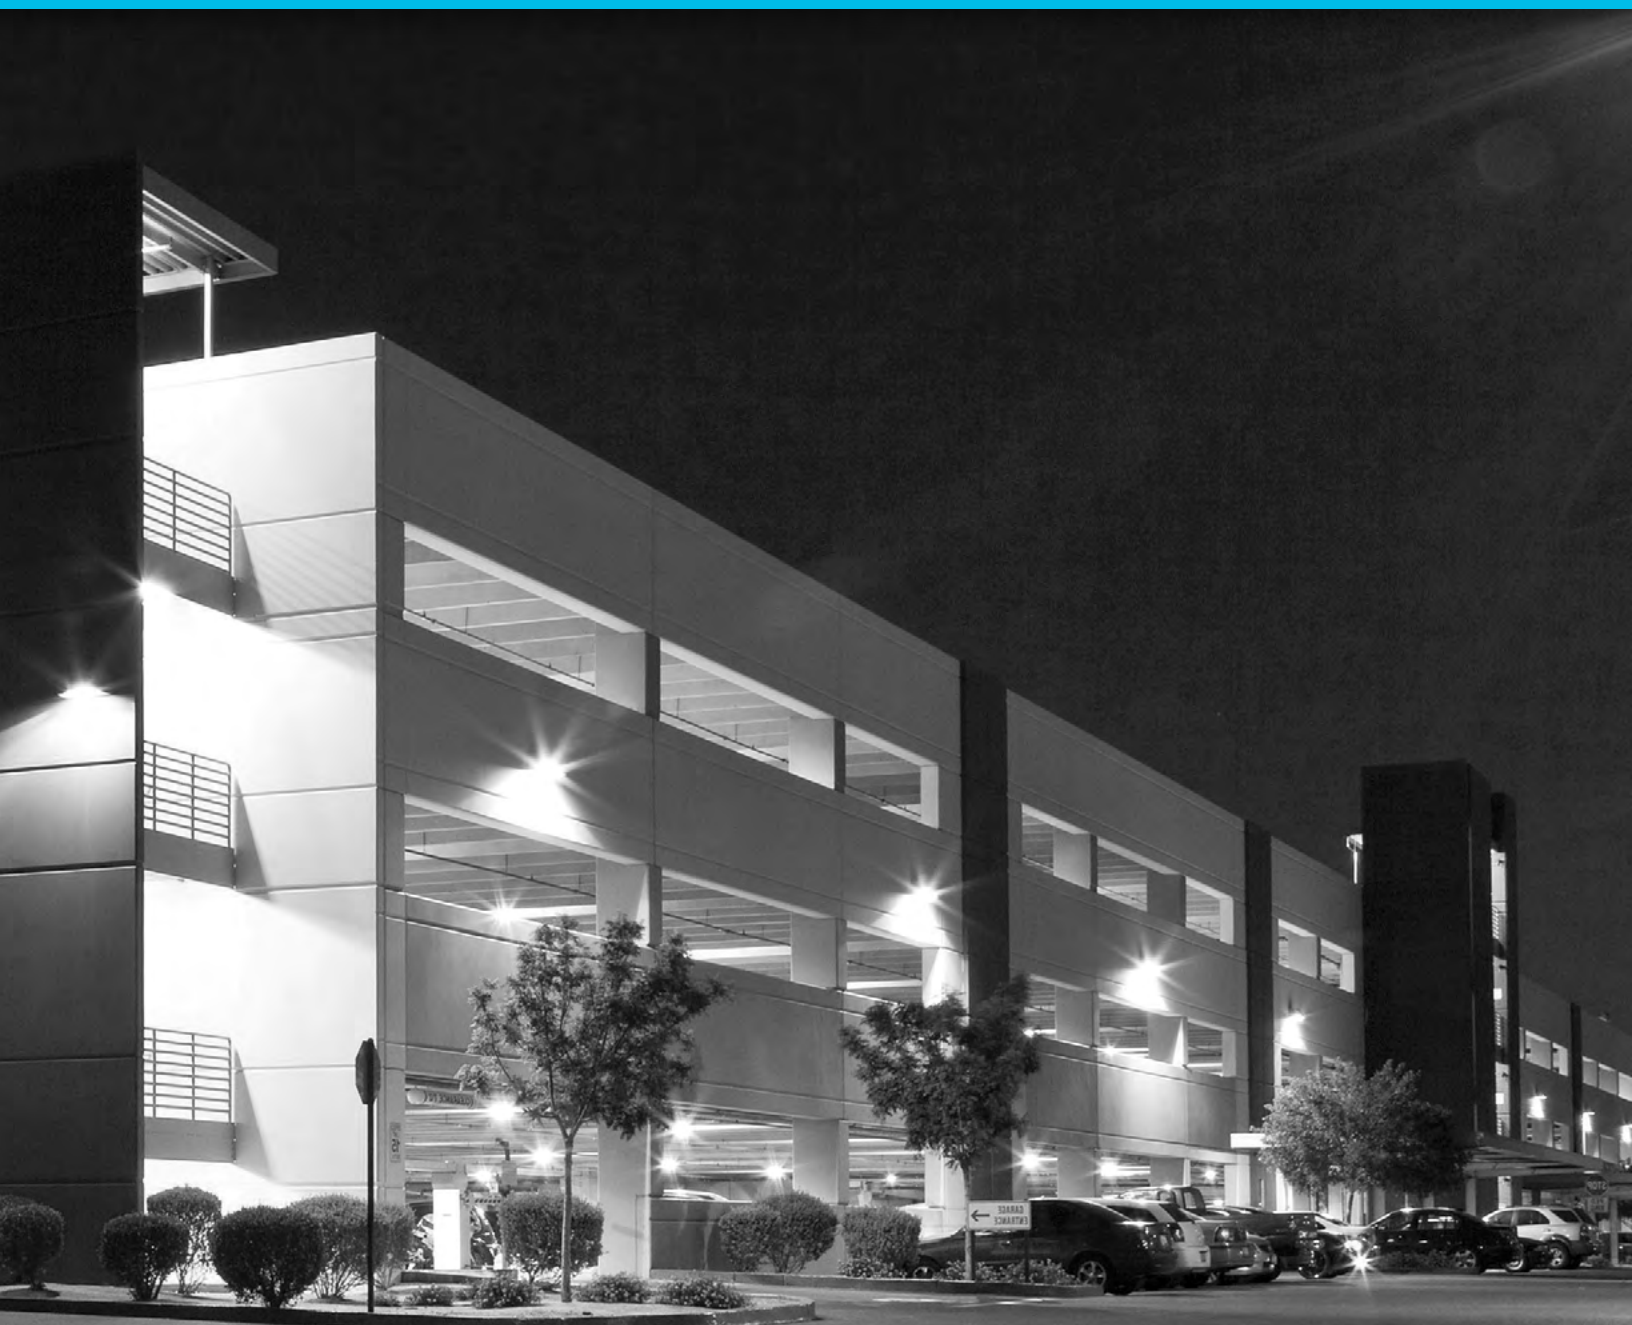

CONSTRUCTION

- Die-Cast Aluminum Housing
- Polyester Powder-Coat Finish
- Continuous Gasket for Wet Locations
- 10-Year Limited Warranty



OPTICS

- Molded Prismatic Lens for Uniform Coverage
- UV Impact Resistant Polycarbonate Lens
- Standard Full Cutoff IESNA Compliant Reflector
- 4000K and 5000K

*Alternate Kelvins Available




17 WATT AND 25 WATT OPTIONS

- External Emergency Backup
- Internal Photocell*
- *Standard on 17W and 25W Versions
- Suitable for Wet Locations
- 3000K, 4000K and 5000K

**MOUNTING**

- (3) 3/4" Threaded Knockouts
- Direct to Electrical Box
- Flush Wall Mount
- Suitable for Wet Locations

CONTROLS

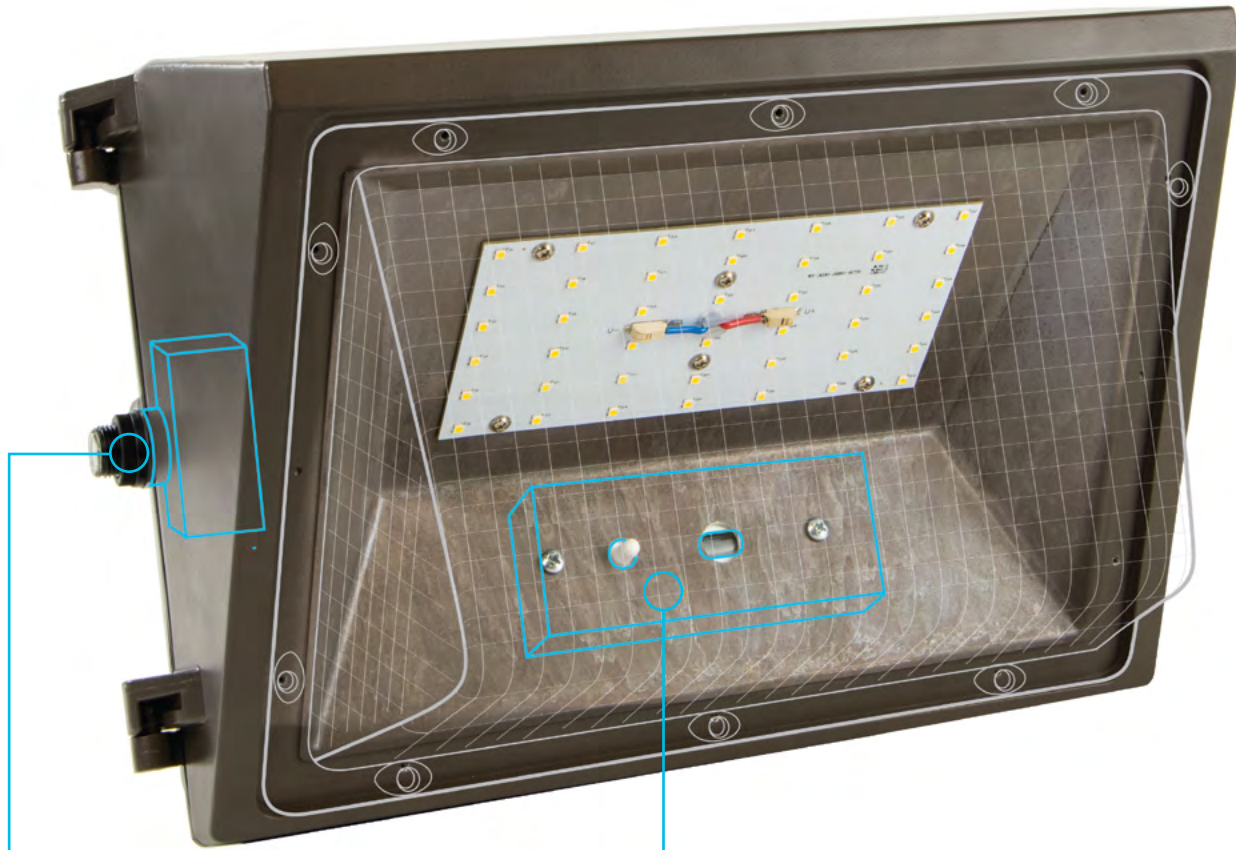
**PHOTOCELL**

- Operating Level: 10~20Lx On, 30~80Lx Off



OCCUPANCY SENSOR

- Vandal Resistant Integrated Occupancy Sensor
- On/Off and 0-10v DC Dimming Options
- Adjustable Time Delay and Cut Off Delay

COVERAGE

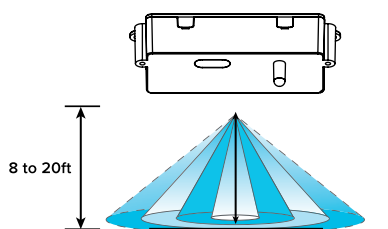

Height of Installation - 8 to 20ft

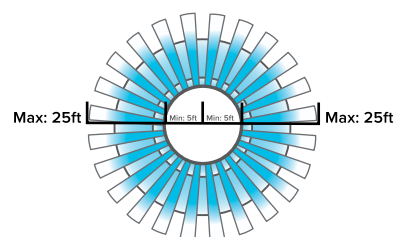(Height of Installation - 8ft)
Detection Range

Detection Angle

ORDERING GUIDE & SPECS

ESL	-	WP	-	(yy)W	-	(xx)	-			
ESL	-	TYPE	-	WATTS	-	GENERATION	-	KELVIN	-	OPTIONS

OPTIONS (ADD AS SUFFIX)

ESL-WP-PC	Wall Pack Photocell
ESL-4OCC-LDD	Occupancy Sensor, 0–10v Dimming, 8' –20' Mounting
ESL-EMG-FDC-30W	Emergency Backup
ESL-REM100	Hand Held Remote

17 | 25 WATT

	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
17 WATT	ESL-WP-17W-3xx	115	1,950	3000K (30) 4000K (40) 5000K (50)	120-277 VAC
25 WATT	ESL-WP-25W-3xx	104	2,600	3000K (30) 4000K (40) 5000K (50)	120-277 VAC

30 | 45 | 70 WATT


	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
30 WATT	ESL-WP-30W-2xx	113	3,400	4000K (40) 5000K (50)	120-277 VAC
45 WATT	ESL-WP-45W-2xx	118	5,300	4000K (40) 5000K (50)	120-277 VAC
70 WATT	ESL-WP-70W-2xx	119	8,100	4000K (40) 5000K (50)	120-277 VAC

90 | 135 WATT


	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
90 WATT	ESL-WP-90W-2xx	124	11,200	4000K (40) 5000K (50)	120-277 VAC
135 WATT	ESL-WP-135W-2xx	121	16,400	4000K (40) 5000K (50)	120-277 VAC

PRODUCT DIMENSIONS


17 | 25 WATTS

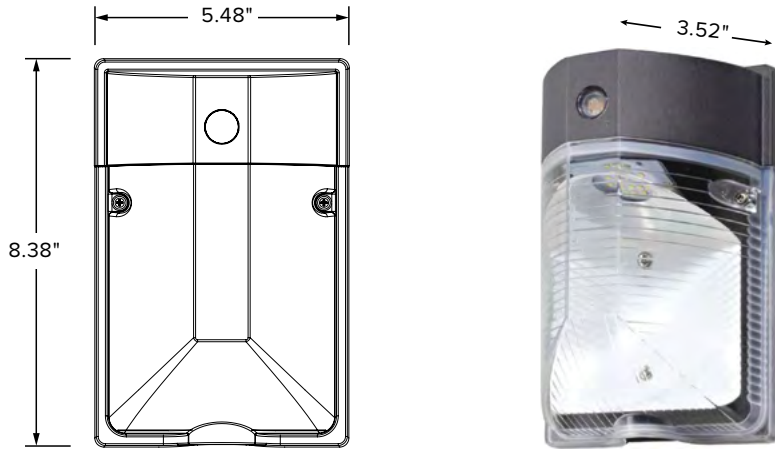

30 | 45 | 70 WATTS

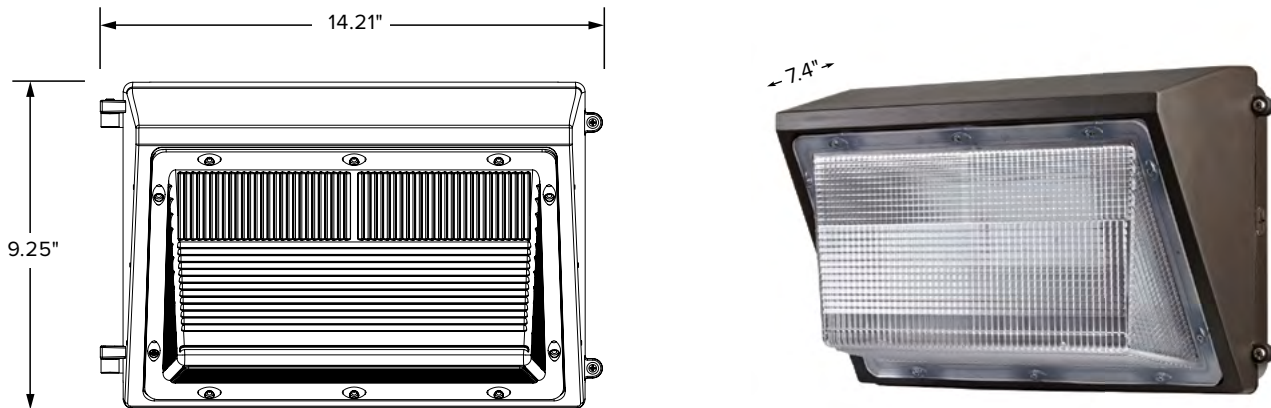

90 | 135 WATTS

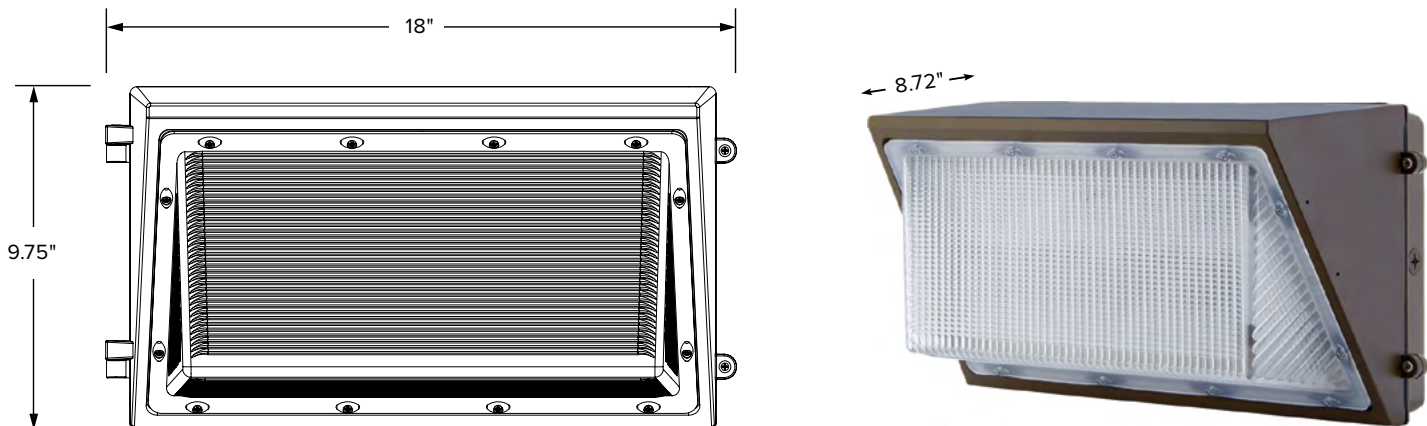

OPTIONS



SENSORS

ESL-WP-PC

Wall Pack Photocell (For 30W Wall Packs and Up)

ESL-40CC-LDD

Occupancy Sensor, 0-10v Dimming, 8'-20' Mounting (For 30W Wall Packs and Up)



EMERGENCY

ESL-EMG-4DC-9W*

Internal Emergency Backup (For 30W Wall Packs, Factory installed)

*Contact Factory For More Options



REMOTE CONTROL

ESL-REM100

Hand Held Remote





WWW.ESLVISION.COM
888.493.5559