

### Key Features & Benefits:

- Dual-Mode, Works With or Without Electronic Ballast
- Glass Construction with Shatterproof Coating
- Wide Beam Angle
- Integral Driver (Isolated)




### Technical Specifications:

- Input Voltage: 120-277 VAC
- Lumen Output: Up to 2,836 Lumens
- Efficacy (lm/W): Up to 155 Lumens per Watt
- Kelvin: 3000K, 3500K, 4000K, 5000K
- Color Rendering Index (CRI): >80
- Material: Glass
- Power Factor: >0.9
- Rated Life (hrs): 50,000 Hours
- Base Type: G13
- Operating Temperature: -4°F – 113°F
- Tube Dimensions (ØxL): 1" x 47.75"
- Tube Weight (lbs): 0.4 Pounds




Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_

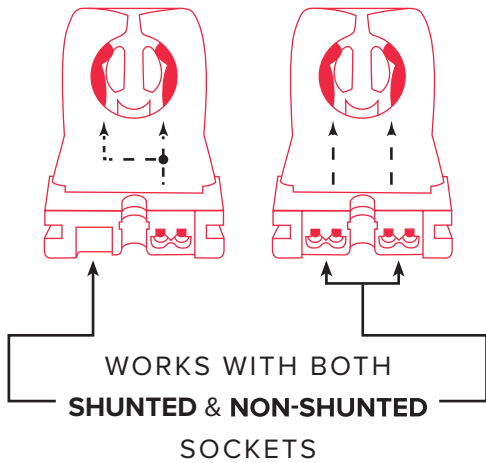


### GDT Wiring:

#### Before Upgrade:



#### After Upgrade:

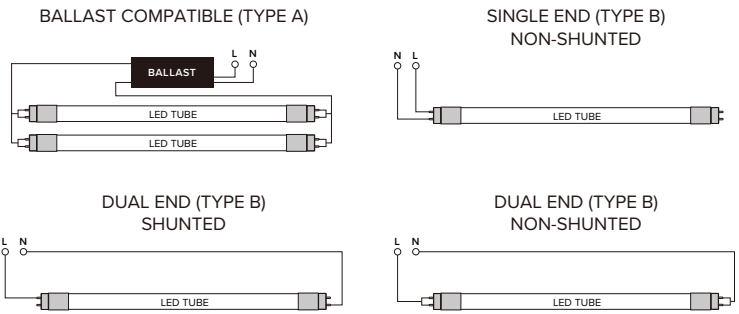

### Ordering Guide:

<b>ESL</b>	-	<b>T8</b>	-	<b>GDT</b>	-	<b>18W</b>	-	<b>F</b>	<b>3</b>	
ESL		T8		TYPE		WATTS		LENS	GENERATION	KELVIN
		T8 Tube		Glass Dual-Mode Tube 4 Foot		18W (18 Watts)		F (Frosted)	3 (3rd Generation)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

\*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2020 ESL Vision, LLC. All rights reserved. Rev. 04/17/2020

**Catalog Data:**

ITEM#	KELVIN	LINE VOLTAGE			0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
		WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)
ESL-T8-GDT-18W-F330	3000K	18.0W	2,795	155	14.4W	1,951	136	19.8W	2,474	125	13.3W	1,698	127
ESL-T8-GDT-18W-F335	3500K	18.4W	2,812	153	14.5W	1,951	134	19.8W	2,609	132	13.3W	1,691	127
ESL-T8-GDT-18W-F340	4000K	18.4W	2,769	151	14.5W	1,948	134	19.9W	2,645	133	13.4W	1,690	126
ESL-T8-GDT-18W-F350	5000K	18.6W	2,836	153	14.6W	1,917	131	19.9W	2,602	131	13.2W	1,676	127

\*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

ITEM#	KELVIN	DLC QPL CODE
ESL-T8-GDT-18W-F330	3000K	P23822J1
ESL-T8-GDT-18W-F335	3500K	PLZ2FALR
ESL-T8-GDT-18W-F340	4000K	PNDEBFG3
ESL-T8-GDT-18W-F350	5000K	P3C8797N

