




WALL PACK SERIES

OUTDOOR FIXTURE



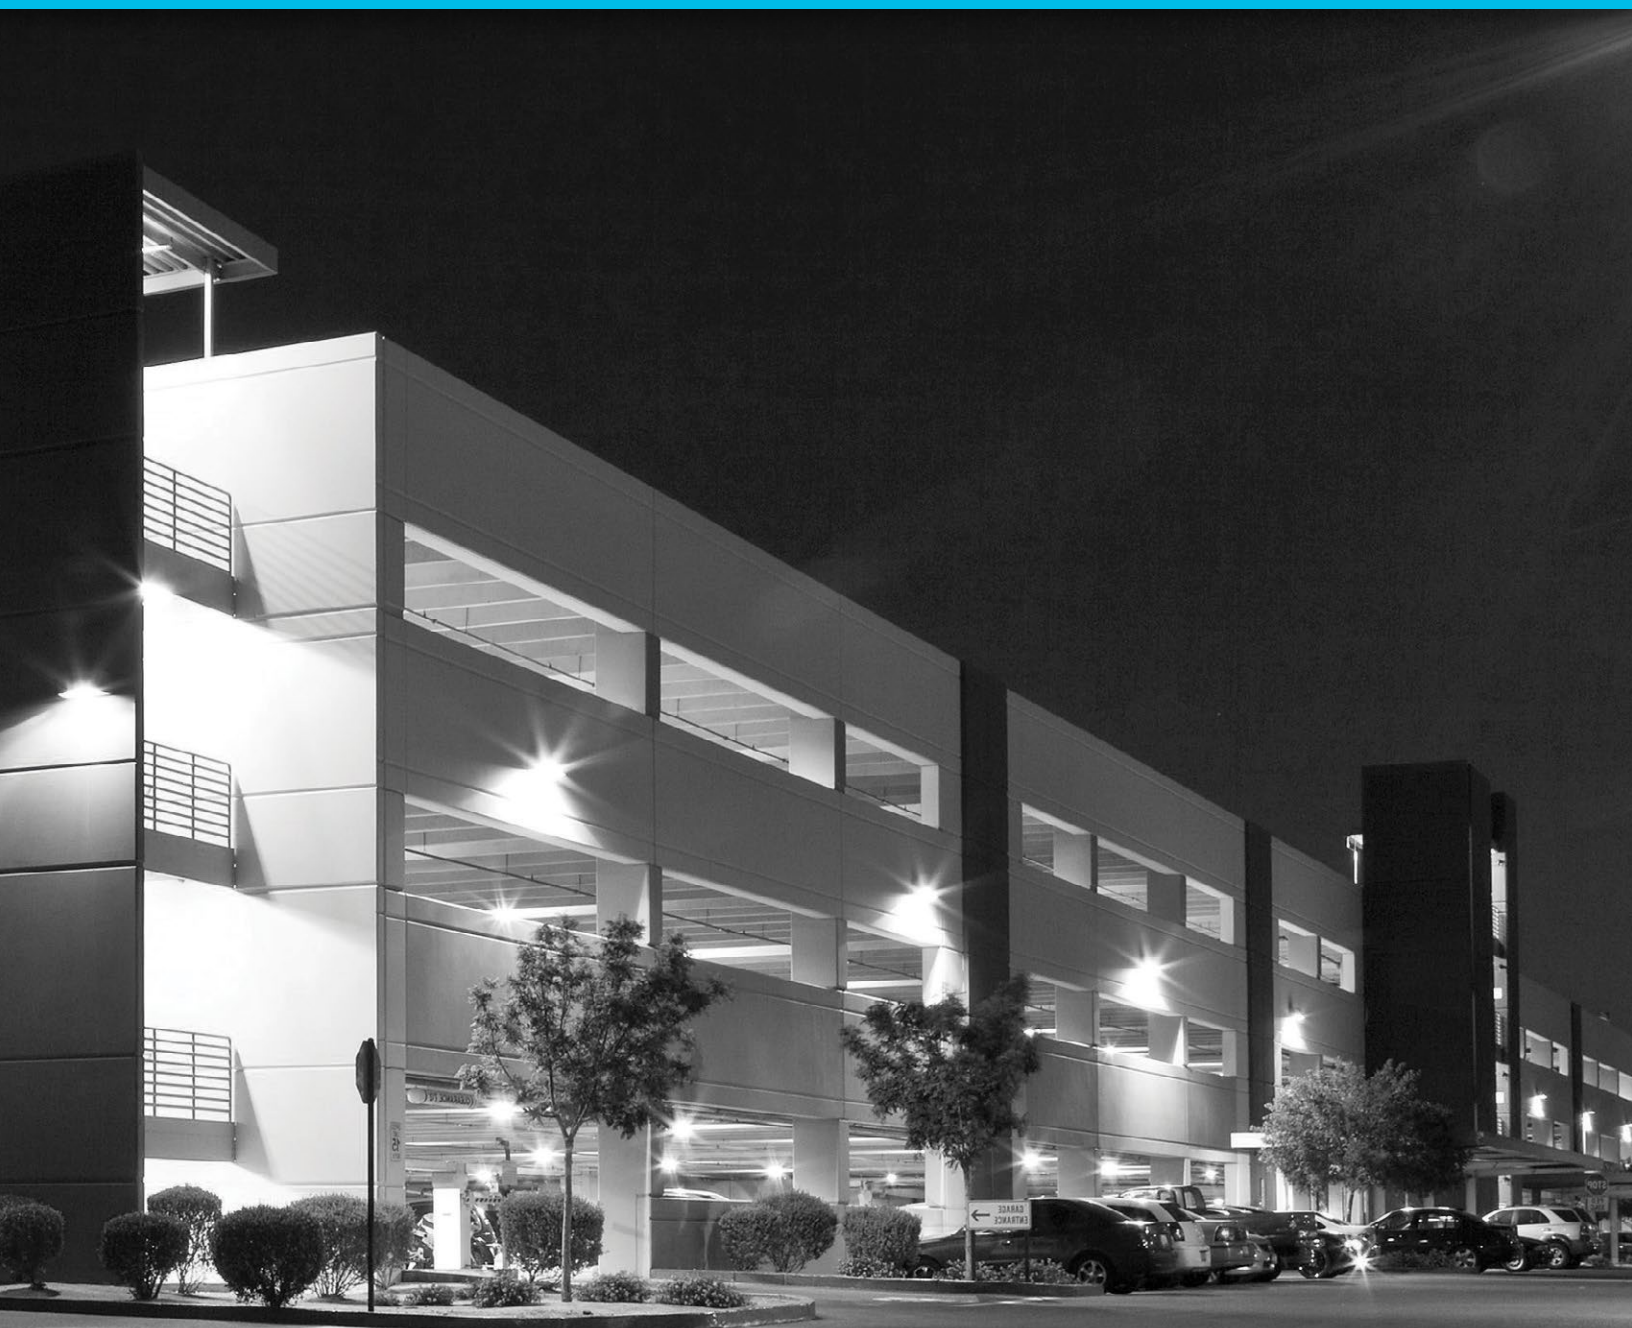

FCWP SERIES

MOUNTING

- 1/2" Threaded Knockouts
- Direct to Electrical Box
- Flush Wall Mount
- Suitable for Wet Locations



OPTICS

- Molded Prismatic Lens for Uniform Coverage
- UV Impact Resistant Polycarbonate Lens
- Standard Full Cutoff IESNA Compliant Reflector (FCWP Series Only)
- 3000K, 4000K and 5000K



17 WATT AND 25 WATT OPTIONS

- External Emergency Backup
- Internal Photocell*
- *Standard on 17W and 25W Versions
- Suitable for Wet Locations
- 4000K and 5000K

WP SERIES



CONSTRUCTION

- Die-Cast Aluminum Housing
- High Performance Heat Sink
- Weathertight LED Driver Housing
- Continuous Gasket Seal
- LEDs Mounted to and Protected by Aluminum Housing with Easy Driver Access Hinged Door
- Bronze or White Finishes (Other Finish Options Available Upon Request)





OPTIONS

SENSORS



- ESL-WP-PC

Wall Pack Photocell (For 30W Wall Packs and Up)
- ESL-40CC-LDD

Occupancy Sensor, 0-10v Dimming, 8'-20' Mounting (For 30W Wall Packs and Up)

EMERGENCY



- ESL-EMG-BBU

Emergency BBU, 1100 Lumens, 90 min Backup, 120-277 VAC, Factory Installed

REMOTE CONTROL




- ESL-REM-100

Hand Held Remote to control ESL-40CC-LDD

FCWP PRODUCT DIMENSIONS

45 | 60 | 90 | 120 WATTS

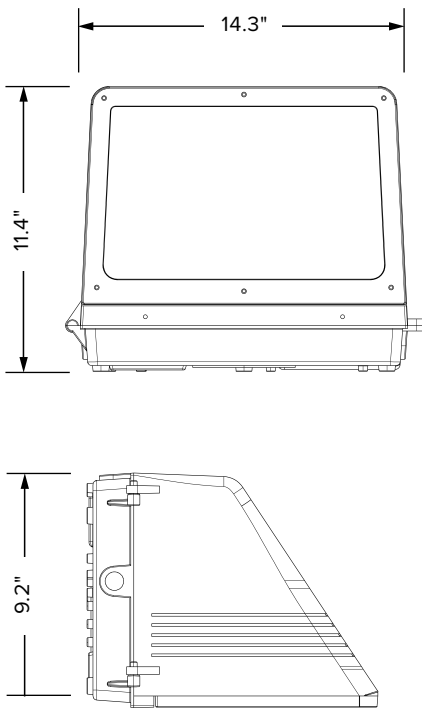

FULL CUTOFF WALL PACK ORDERING GUIDE

ESL	-	FCWP	-	1	(xx)	-		-	
ESL	-	TYPE	-	GENERATION	KELVIN	-	VOLTAGE	-	FINISH
				45W (45 Watts) 60W (60 Watts) 90W (90 Watts) 120W (120 Watts)	1 (1st Generation) 30 (3000K) 40 (4000K) 50 (5000K)		Blank (120-277V) HV (277-480V)		Blank (Bronze) WH (White)


45 | 60 | 90 | 120 WATTS

	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
45 WATT	ESL-FCWP-45W-1xx	142	6,688	3000K (30) 4000K (40) 5000K (50)	120-277 VAC
60 WATT	ESL-FCWP-60W-1xx	144	9,019	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC
90 WATT	ESL-FCWP-90W-1xx	145	12,989	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC
120 WATT	ESL-FCWP-120W-1xx	142	17,090	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC




WP PRODUCT DIMENSIONS


17 | 25 WATT

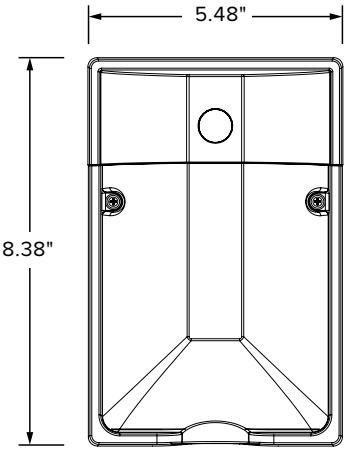

30 | 45 | 60 | 90 WATT

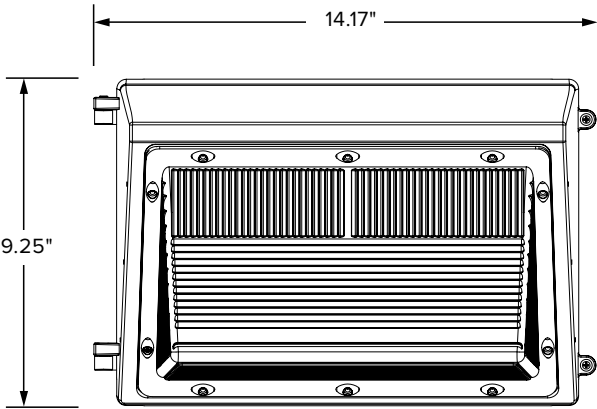

120 WATT

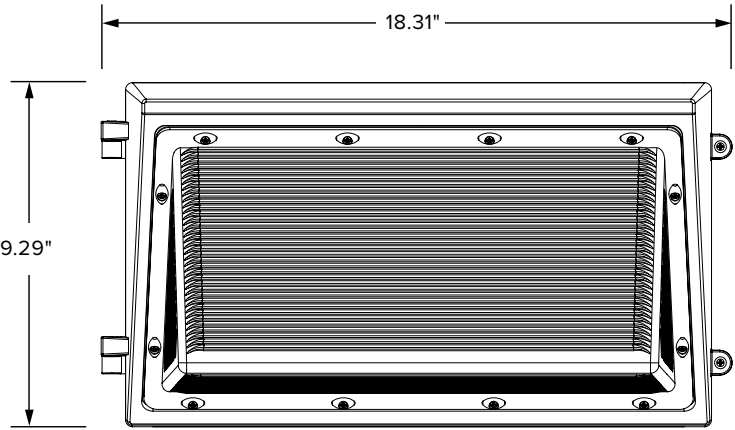

WALL PACK ORDERING GUIDE

ESL	-	WP	-		-	(xx)	-		-			
ESL	-	TYPE	-	WATTS	-	GENERATION	-	KELVIN	-	VOLTAGE	-	FINISH
				17W (17 Watts) 25W (25 Watts) 30W (30 Watts) 45W (45 Watts) 60W (60 Watts) 90W (90 Watts) 120W (120 Watts)		3 (3rd Generation) 4 (4th Generation)		30 (3000K) 40 (4000K) 50 (5000K)		Blank (120-277V) HV (277-480V)		Blank (Bronze) WH (White)

17 | 25 WATT

17 | 25 WATT

	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
17 WATT	ESL-WP-17W-3xx	115	1,950	4000K (40) 5000K (50)	120-277 VAC
25 WATT	ESL-WP-25W-3xx	104	2,600	4000K (40) 5000K (50)	120-277 VAC

30 | 45 | 60 | 90 WATT

	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
30 WATT	ESL-WP-30W-4xx	145	4,319	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC
45 WATT	ESL-WP-45W-4xx	142	6,197	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC
60 WATT	ESL-WP-60W-4xx	142	8,653	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC
90 WATT	ESL-WP-90W-4xx	140	12,266	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC

120 WATT

	PRODUCTS	MAX lm/W	MAX LUMENS	AVAILABLE KELVIN (xx)	AVAILABLE VOLTAGE
120 WATT	ESL-WP-120W-4xx	140	16,454	3000K (30) 4000K (40) 5000K (50)	120-277 VAC HV - 277-480 VAC



WWW.ESLVISION.COM

888.493.5559

Headquarters
1136 S 3600 W
Salt Lake City, UT, USA

Atlanta
6371 Corley Road
Norcross, GA, USA