


Key Features & Benefits:

- Reduces Light Pollution and Adverse Effects on Wildlife
- Utilizes Existing Fixtures for Fast and Cost Effective Installation
- Indoor and Outdoor Applications:
 - Beach Front & Waterways
 - Airports
 - Commercial & Retail
 - Parking Lots & Buildings
 - Food & Beverage Production
- 10 Year Warranty
- Optimized Pin Array Heatsink
- Overheat Shutdown
- L70 Lifetime >100,000 Hours
- Intelligent Thermal Control
- Compatible with Networked Lighting Control Qualified Systems



Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

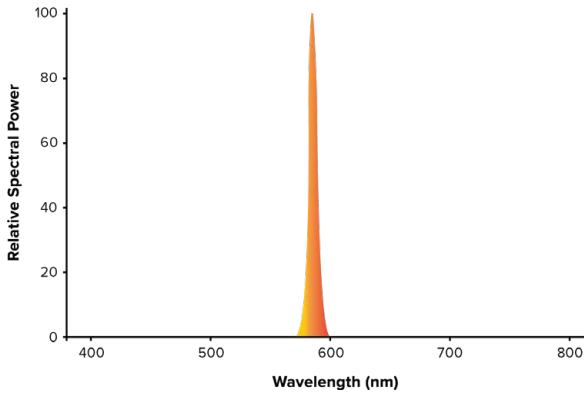

Technical Specifications:

Light Specifications

- Lumen Output: Up to 16,000 Lumens
- Wavelength (nanometers): 590nm
- CRI: >75
- Rated Life (hrs): 100,000 Hours
- IES Classification: Fixture Dependent
- Dimensions (LxWxH): 8.6" x 5.7" x 2.5"
- Weight Without Driver (lbs): 1.7

Driver Specifications


- Power: 200 Watts
- Input Voltage: 120-277 VAC | HV - 347-480 VAC
- Input Current @120V: 1.67A
- Input Current @277V: 0.72A
- Input Current @480V: 0.42A
- Operating Temperature: -40°F to 176°F (-40°C to 80°C)
- Non-Dimmable Driver Dimensions - (LxWxH): 9.6" x 2.7" x 1.53"
- 0-10v Dimmable Driver Dimensions - (LxWxH): 9.6" x 2.7" x 1.53"

High Voltage Driver Dimensions - (LxWxH): 10" x 2.7" x 1.53"
 0-10v Dimmable High Voltage Driver Dimensions - (LxWxH): 10" x 2.7" x 1.53"

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	WAVELENGTH	INPUT VOLTAGE
ESL-MUR-200W-3-590NM	200W	16,000	590 nm	120-277 VAC
ESL-MUR-200W-3-590NM-HV	200W	16,000	590 nm	347-480 VAC


Ordering Guide:

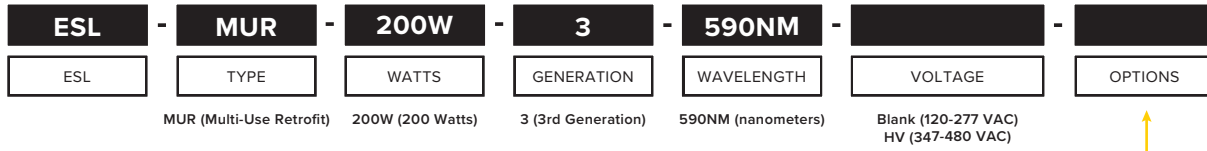

Options (Add as Suffix):

- ESL-SPD-277-1 Surge Protector; (100-277 VAC)
- ESL-480V-SD01 480 Volt Step Down Transformer
- ESL-3OCC IP65 High Bay 0-10v Dimming Sensor. 8'- 50' Mounting, Wire From Side
- ESL-3OCCB IP65 High Bay 0-10v Dimming Sensor. 8'- 50' Mounting, Wire From Top
- ESL-4OCC-LDD Occupancy Sensor, 0-10v Dimming, 8'-20' Mounting
- ESL-REM-100 Hand Held Remote

Dimensions:

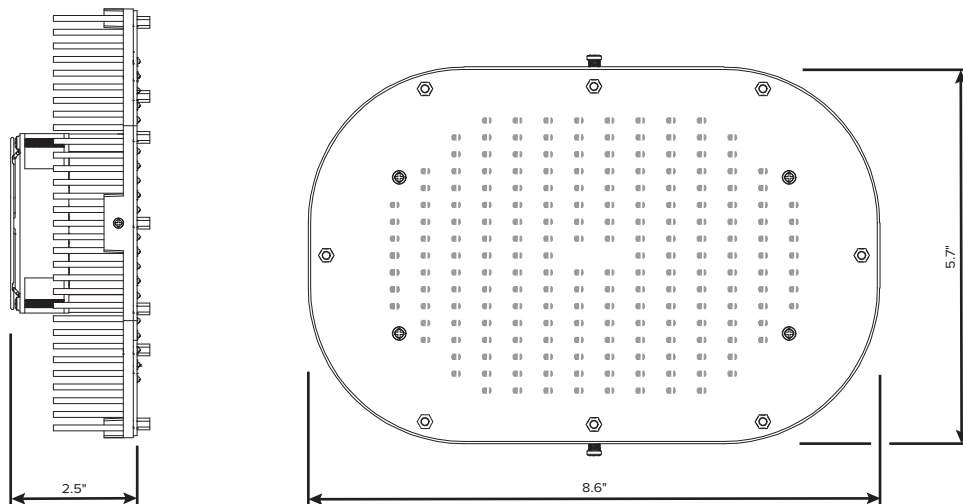

Standard Driver Dimensions:

