KONEX SERIES

ESL-KNX-RPP-002

WARNING

Risk of electric shock. Disconnect main power at circuit breaker before installing or servicing the fixture


- 1. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- 2. To prevent wiring damage or abrasion. Do not expose wiring to edges of sheet metal or other sharp objects.
- 3. High Voltage. This device must be installed by a qualified installer or electrician. Follow all applicable electrical codes for installation.

INSTRUCTIONS

1. Turn off power circuit breaker or test that power is off before wiring.

NOTE: Use a non-metal electrical enclosure for best wireless communication performance

2. Follow the below wiring diagram for installation

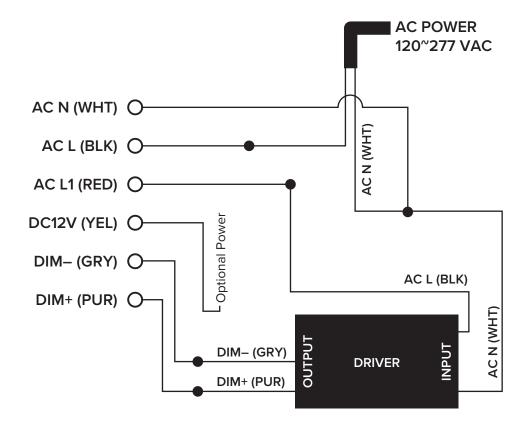

3. Connect wires with wire nuts and cap any unused wires.

- 4. Restore power to the circuit.
- 5. Use the ESL Vision APP to learn in the device.

Note: The cumulative leakage current of less than 3.5mA on the control circuit.