

Key Features & Benefits:

- Double Ended or Single Ended Wiring
- Glass Construction with Shatterproof Coating
- Integral Driver (Isolated)

Project: _____ Date: _____


Catalog #: _____

Notes: _____

Product Specifications:




Wattage: 12 Watts
 Lumen Output: Up to 1,740 Lumens
 Efficacy (lm/W): Up to 145 Lumens per Watt
 Kelvin: 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >80
 Input Voltage: 120–277 VAC
 Material: Glass with Shatterproof Coating
 Power Factor: >0.9
 Rated Life (hrs): 50,000 Hours
 Base Type: G13
 Operating Temperature: -4°F – 113°F
 Tube Dimensions (ØxL): 1.14" x 47.22"
 Tube Weight (lbs): 0.62 Pounds

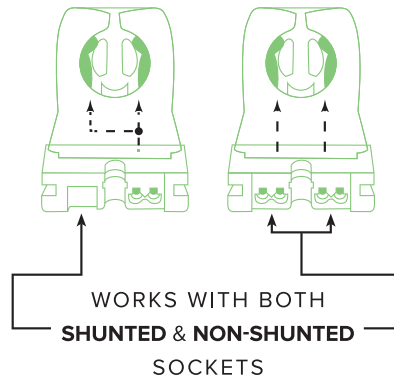


T8B Wire Diagrams (Type B):

Before Upgrade:

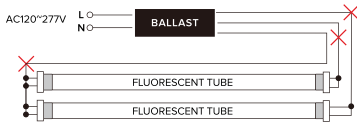

After Upgrade:

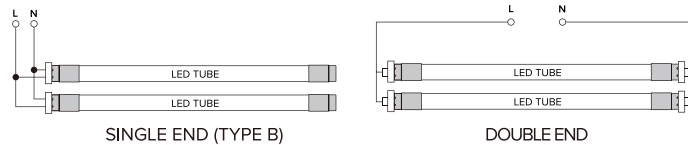

Ordering Guide:

ESL	T8	TYPE	WATTS	LENS	GENERATION	KELVIN
ESL	T8	B4	12W	F	1	(xx)
	T8 Tube	Glass Line Voltage Tube 4 Foot	(12W) 12 Watts	(F) Frosted	(1) 1st Generation	(35) 3500 Kelvin (40) 4000 Kelvin (50) 5000 Kelvin



Catalog Data:

ITEM#	KELVIN	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	DLC QPL CODE
ESL-T8B4-12W-F135	3500K	12W	1,740	145	PEADIVZF
ESL-T8B4-12W-F140	4000K	12W	1,740	145	PDU0TR9C
ESL-T8B4-12W-F150	5000K	12W	1,740	145	PVKS43Y

