

Key Features & Benefits:


- Dual-Mode, Works With or Without Electronic Ballast
- Rugged Aluminum Construction
- Integral Driver (Isolated)



Product Specifications:


Wattage: 15 Watts
 Lumen Output: Up to 1,875 Lumens
 Efficacy (lm/W): Up to 125 Lumens per Watt
 Kelvin: 5000K
 Color Rendering Index (CRI): >80
 Input Voltage: 120–277 VAC
 Material: Aluminum and Plastic
 Power Factor: >0.9
 Rated Life (hrs): 50,000 Hours
 Base Type: G13
 Operating Temperature: -4°F – 113°F (-20°C – 45°C)
 Tube Dimensions (ØxL): 1.1" x 47.12"
 Tube Weight (lbs): 0.71 Pounds

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

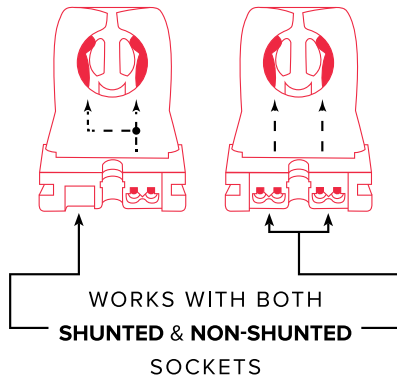


T8BC Wire Diagrams (Type AB):

Before Upgrade:

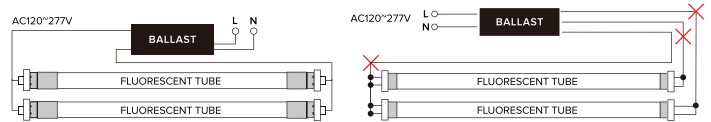

After Upgrade:

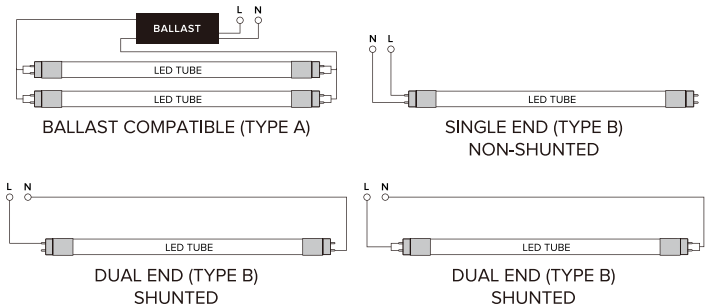

Ordering Guide:

ESL	-	T8	-	BC4	-	15W	-	C	-	1	-	50
ESL	-	T8	-	TYPE	-	WATTS	-	LENS	-	GENERATION	-	KELVIN
		T8 Tube		Dual-Mode Tube 4 Foot		15W (15 Watts)		C (Clear)		1 (1st Generation)		50 (5000 Kelvin)

Catalog Data:

ITEM#	KELVIN	LINE VOLTAGE				0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR		
		VOLTAGE	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)	WATTS	LUMEN OUTPUT	(lm/W)
ESL-T8BC4-15W-C150	5000K	120	15.21	2058	135.36	23.53	2086	88.66	22.61	2050	90.65	37.54	4154	110.66
		277	14.93	2066	138.44	24.6	2078	84.47	23.68	2043	88.27	37.02	4118	111.23

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide