

Illumination:

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

Electrical:

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Surface mount back plate fits most standard size junction boxes and snaps into place.
- Suitable for wall or ceiling mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Options:

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).

Warranty / Listing:

One year warranty on all electronics and housing.
 UL Listed for damp locations (0°C – 30°C).
 Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA,
 Local and State Codes.

Project: _____


Date: _____

Catalog #: _____

Notes: _____



Dimensions:

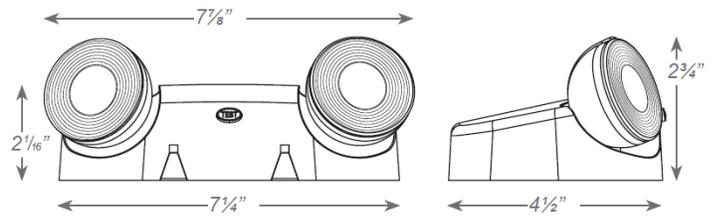

Catalog Data:

Sample Part Number: E1

MODEL	HOUSING COLOR		OPTIONS	
E-1	Blank	White	RC	Remote Capacity ¹
	B	Black	SPV	120/230 Volt 50/60Hz
			HL	High Lumen LED ¹

NOTES:

¹ -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Electrical Information:

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
E-1	0.33	0.33	0.37	0.046	0.044	0.052
E-1 RC/HL	0.52	0.52	0.60	0.068	0.068	0.070

Remote Lamp Compatibility:

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			MRHLED	RHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED	
				MV		6V	12V	6V	12V	6V	12V	6V	12V		
E-1-RC	3.6V	1W	X	X											
E-1-HL	3.6V	0.5W	X												