

### Key Features & Benefits:

- Slim Profile
- 120V TRIAC Dimmable
- Field Adjustable Kelvin (2700K, 3000K, 3500K, 4000K, 5000K)
- Compatible with 3/0 & 4/0 J-Boxes

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Product Specifications:

Power: 15 Watts  
 Lumen Output: 1,200 Lumens  
 Efficacy (lm/W): Up to 80 Lumens per Watt  
 Kelvin Selectable: 2700K, 3000K, 3500K, 4000K, 5000K  
 CRI: >90  
 Power Frequency: 50/60Hz  
 Power Factor: >0.8  
 Operating Temperature: -4°F–122°F (-20°C–50°C)  
 Input Voltage: 120 VAC  
 Estimate L70 Lifetime 120,000 Hours calculated per TM21  
 Warranty: 5 Year Warranty  
 Product Weight: 13.05oz



**KELVIN SELECTABLE**




### Ordering Guide:

ESL	TYPE	SIZE	WATTAGE	GENERATION	KELVIN
ESL	DSK	(dd)	(yy)W	3	2750
	(DSK) Disk	(6)" Round	15W	(3) 3rd Generation	(2750) 2700K, 3000K, 3500K, 4000K, 5000K

### Catalog Data:

ITEM#	WATTAGE	KELVIN SELECTABLE	LUMENS	EFFICACY lm/W	INPUT VOLTAGE	DIMENSIONS (LxWxH)
ESL-DSK-6-15W-32750	15W	2700K 3000K 3500K 4000K 5000K	1,200	80	120 VAC	7.32"x7.32"x2.93"

**Fixture Dimensions:**

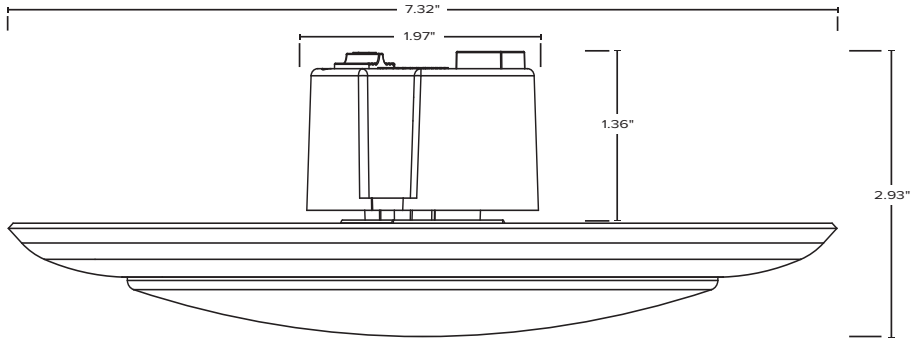

**Lumen Ambient Temperature (LAT) Multipliers:**

AMBIENT		LUMEN MULTIPLIER
0 °C	32 °F	1.02
10 °C	50 °F	1.01
20 °C	68 °F	1.00
25 °C	77 °F	1.00
30 °C	86 °F	1.00
40 °C	104 °F	0.99
50 °C	122 °F	0.96

**Selectable Kelvin Operation:**

15W

