

Project: _____ Date: _____

Catalog #: _____

Notes: _____

Illumination:

- Ultra bright, energy efficient, long life Red or Green LED.

Electrical:

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



Mounting:

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

Warranty / Listing:


Five year warranty on all electronics and housing. Battery pro rated for five years.

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for damp locations (0°C – 50°C).

Certified to CEC under Title 20 Regulations.

Dimensions:

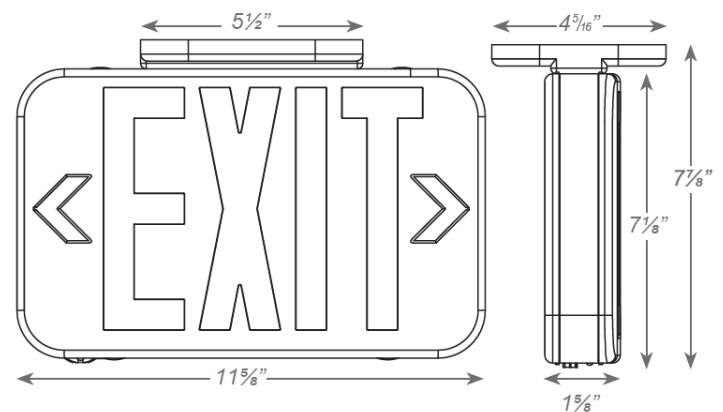

Catalog Data:

Sample Part Number: EZRXTU2RWEM

SALIDA face plate option available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
EZRXTU	2 <i>Universal Single/ Double Face</i>	R Red	W White	(blank) AC Only
		G Green	B Black	EM Battery Backup

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Electrical Information:

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZRXTU-RED/GREEN/EM	1.0	1.0	0.09	0.09