

Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical:

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Aluminum mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount.

Housing:

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field. Quick-snap face plate closure.

Options:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with “Assembled in the USA” under the Buy American Act.

Project: _____

Date: _____

Catalog #: _____


Notes: _____



Warranty / Listing:

Five year warranty on all electronics and housing. Battery prorated for five years.
 Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 UL Listed for damp locations (0°C – 50°C).
 Certified to CEC under Title 20 Regulations.

Dimensions:

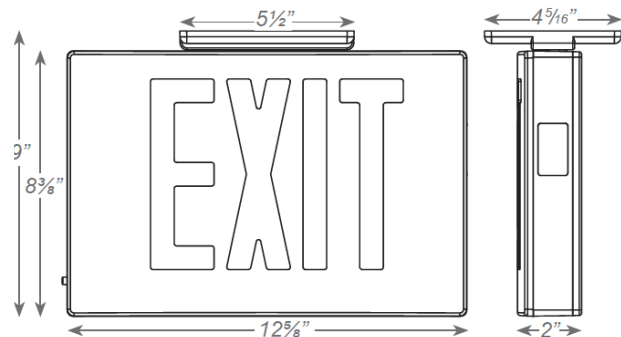

Catalog Data:

Sample Part Number: KXTEU1RBAEM

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	FACE PANEL	BATTERY	OPTIONS
KXTEU	1 Single Face	R Red	W White	W White	(blank) AC-Only	SDT Self-Diagnostics ¹
	2 Double Face	G Green	B Black	B Black	EM Battery Backup	2C Dual Circuit Operation ²
	3 Universal Single/Double Face		A Aluminum	A Aluminum		TP Tamper-Proof USA Assembled In USA

Special voltage options available. Check with your Best Lighting Representative.

¹ Available only with EM units.

² Available only with AC units.

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Electrical Information:

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
KXTEU-RED/EM/2C/SDT	3.2	3.6	0.031	0.019
KXTEU-GREEN/EM/2C/SDT	3.8	4.4	0.033	0.017