

Illumination:

- Two fully adjustable 1.0 watt white LED lamp heads.
- High performance chrome-plated metal reflectors and plastic lens for optimal light distribution.

Electrical:

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Remote capacity of 10.0 watts standard.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Bar hangers on the back box for recessed mount.
- Compatible with drop ceiling mount installations.

Housing:

- Durable 20-gauge steel trim plate in white or black finish.
- Trim securely attached to housing with spring clips.

Warranty / Listing:

Five year warranty on all electronics and housing. Battery prorated for two years.
 Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 UL Listed for dry locations. (25°C)



Catalog Data:

Sample Part Number: LEDR-7

*Special Voltage options available.
 Check with your Best Lighting representative.*

Project: _____


Date: _____

Catalog #: _____

Notes: _____



Dimensions:

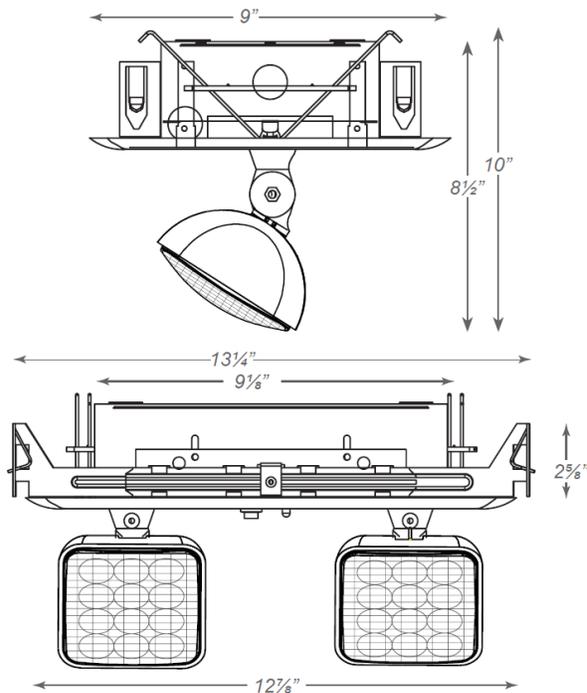

MODEL	HOUSING COLOR	
LEDR-7	(blank)	White
	B	Black

