

Project: _____ Date: _____

Catalog #: _____

Notes: _____

Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical:

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing:

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout Chevron directional indicators.

Options:


- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.



Warranty / Listing:

Five year warranty on all electronics and housing. Battery prorated for five years.
 Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 UL Listed for damp locations (0°C – 50°C).
 Certified to CEC under Title 20 Regulations.

Dimensions:

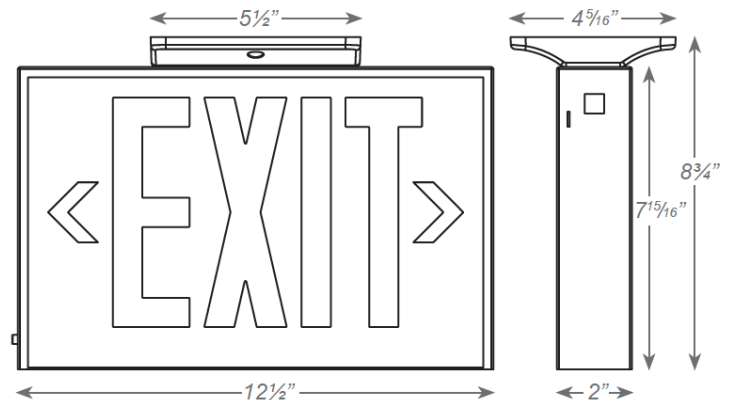

Catalog Data:

Sample Part Number: SXTEU2RWEM

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
SXTEU	2 <i>Universal Single/ Double Face</i>	R Red	W White	(blank) AC-Only	SDT Self-Diagnostics ¹
		G Green	B Black	EM Battery Backup	

¹ Available only with EM units.

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

Electrical Information:

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
SXTEU-RED/GREEN/EM/SDT	3.8	3.8	0.034	0.020