

### Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

### Electrical:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Mounting:

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### Housing:

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

### Options:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- Custom: Signs available with requested “special” wording.

### Catalog Data:

Sample Part Number: WLEZXTEU1RWEM-CW

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_



### Warranty / Listing:


Five year warranty on all electronics and housing. Battery prorated for five years.

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for wet locations (-20°C – 50°C).

Certified to CEC under Title 20 Regulations.

### Dimensions:

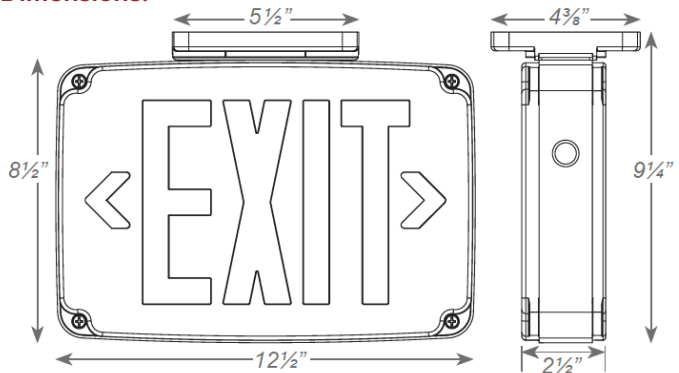

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
WLEZXTEU	1 Single Face	R Red	W White (with white faceplate)	(blank) AC-Only	SDT Self-Diagnostics <sup>1</sup>
	2 Double Face	G Green	B Black (with black faceplate)	EM-CW Battery Backup (Cold Weather Standard)	2C Dual Circuit Operation <sup>2</sup>
			G Gray (with white faceplate)		TP Tamper-Proof
					CUSTOM Custom Wording

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Catalog #: \_\_\_\_\_  
 Notes: \_\_\_\_\_

**Electrical Information:**

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
WLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
WLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011