

Key Features & Benefits:

- Resistant to Shock and Vibration
- Emergency Back Up Capable
- IK10 Impact Rated
- ABS Certified
- Marine Rated Powder Coating
- Standard 10kV Surge Protection

Product Specifications:

Power: 20–80 Watts
 Lumen Output: Up to 11,200 Lumens
 Efficacy (lm/W): Up to 140 Lumens per Watt
 Kelvin: 3000K, 4000K, 5000K
 CRI: >70
 Power Frequency: 50/60Hz
 Power Factor: >0.9
 Operating Temperature: -40°F–140°F (-40°C–60°C)
 Input Voltage: MV 120–277 VAC, HV 200–480 VAC,
 DC12–48V
 Life Span: >150,000 Hours
 Warranty: 7 Year Warranty with 10 Year Option
 Product Weight:
 8.82 lbs — Small
 12.13 lbs — Large

Certifications & Ratings:

Class I, Division 2, Groups A,B,C,D
 Class II, Division 2, Groups F,G
 Class III
 UL 1598, UL 1598A — Standard for Luminaries for
 Installation on Marine Vessels
 UL844 — Standard for Luminaries for Use in
 Hazardous Locations
 IK10
 ABS Certified
 Marine Rating Powder Coated

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____



Ordering Guide:

ESL	TYPE	SIZE	WATTAGE	HAZARD LEVEL	KELVIN	INPUT VOLTAGE	BEAM ANGLE	OPTIONS
ESL	HZLHB	(sz)	(yy)W	2	(xx)	(zz)	(bb)	
	(HZLHB) Hazardous Linear High Bay	(S) Small (L) Large	20W 40W 60W 80W	(2) Class 1 Division 2	(30) 3000K (40) 4000K (50) 5000K	(Blank) MV 120–277 VAC (HV) 200–480 VAC (DC12) DC12–48V	(60D) (90D) (120D) Default	

FACTORY INSTALLED OPTIONS


ESL-HZLHB-EMG Emergency Back Up Unit for Hazardous Linear High Bay Series

Catalog Data:


ITEM#	WATTAGE	KELVIN (xx)	LUMENS	EFFICACY lm/W	INPUT VOLTAGE	DIMENSIONS (LxWxH)
ESL-HZLHB-S20W-2xx-zz-bb	20W	(30) 3000K	2,800	140	(Blank) MV 100–277V (DC12) DC12–48V	24"x4.7"x9.5"
ESL-HZLHB-S40W-2xx-zz-bb	40W	(40) 4000K	5,600	140	(Blank) MV 100–277V (HV) 200–480V (DC12) DC12–48V	47"x4.7"x9.5"
ESL-HZLHB-L60W-2xx-zz-bb	60W	(50) 5000K	8,400	140		
ESL-HZLHB-L80W-2xx-zz-bb	80W		11,200	140		

Lighting Distribution:


40 Degree

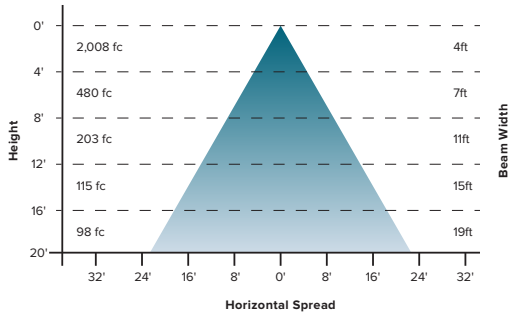


90 Degree

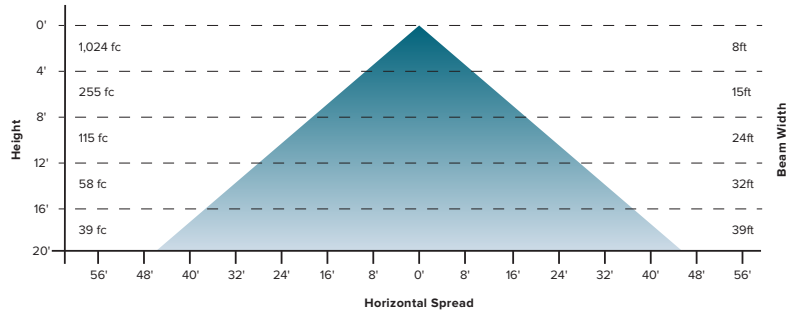

60 Degree

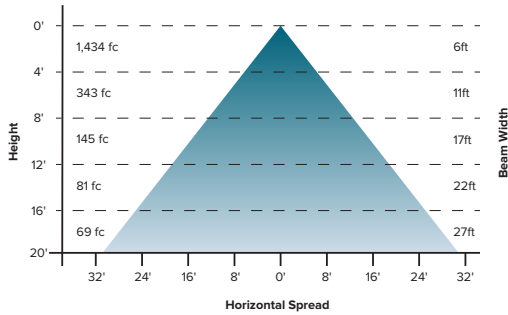


120 Degree

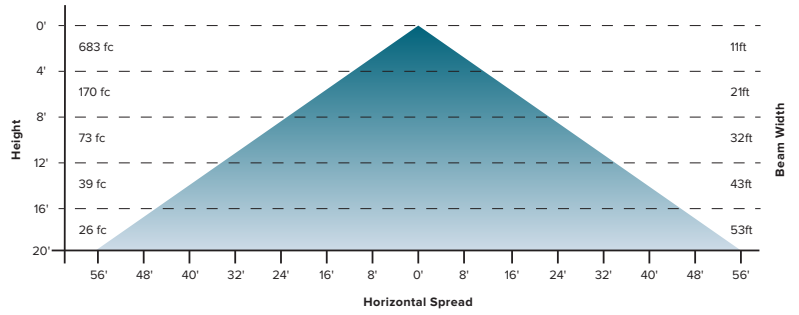




Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT		LUMEN MULTIPLIER
0 °C	32 °F	1.02
10 °C	50 °F	1.01
20 °C	68 °F	1.00
25 °C	77 °F	1.00
30 °C	86 °F	1.00
40 °C	104 °F	0.99
50 °C	122 °F	0.96

Fixture Dimensions:

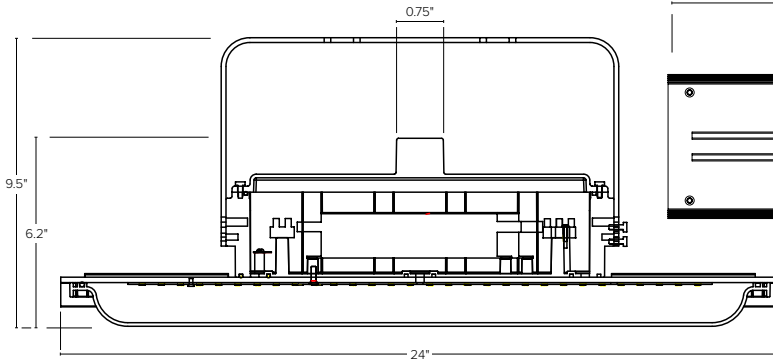


Small

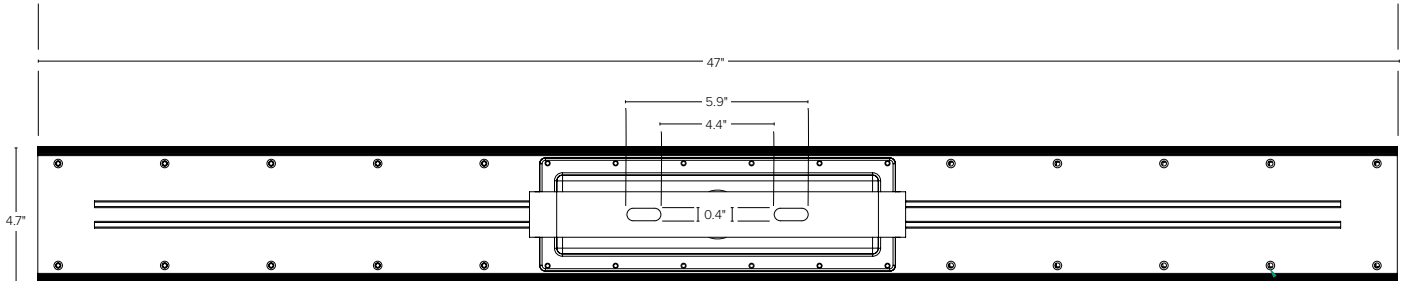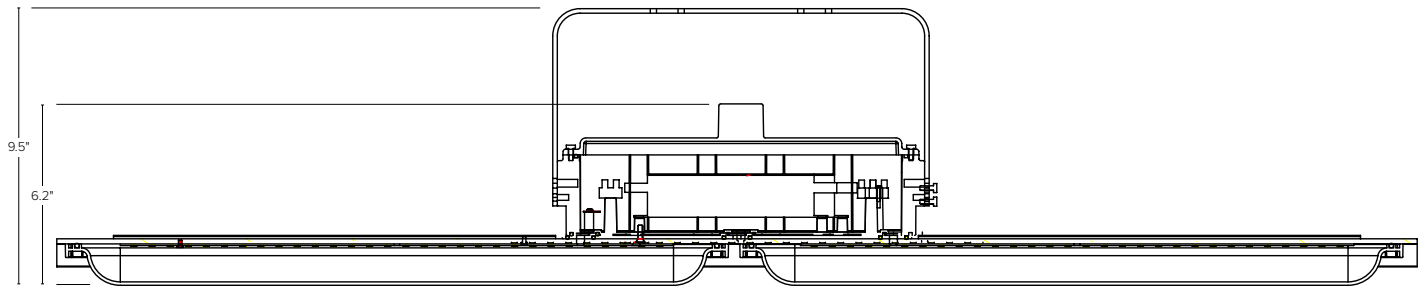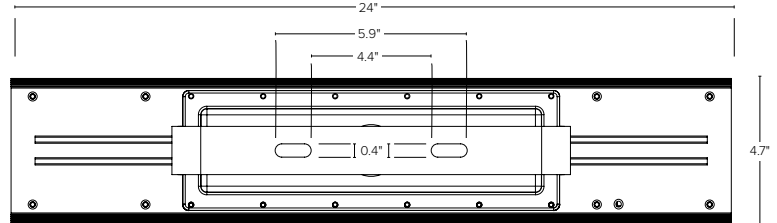

Large

Mounting Diagrams:

Ceiling Mounting



Pole Pendant Mounting

