



PRODUCT CATALOG

Volume #24

LAMPS

HID REPLACEMENT

SELECTABLE CL LAMP	4
------------------------------	---

GENERAL LAMPS

A19 LAMP	5
BR LAMP	5
PAR LAMP	5
CHANDELIER LAMP	5

TUBES

TYPE B TUBES	6
TYPE AB TUBES	7

RETROFITS

MUR

MULTI-USE RETROFIT	10
590 NM AMBER MULTI-USE RETROFIT	11

LINEAR RETROFITS

640 INTELLISENSE™ SINGLE BASKET TROFFER RETROFIT	12
860 SELECTABLE STRIP RETROFIT	12

DOWNLIGHTS

SLIM DOWNLIGHT (WAFER)	14
OPTUS COMMERCIAL CAN.	14
DISK	15
5CCT OCCUPANCY DISK	15
5CCT DECORATIVE DISKS	16
RESIDENTIAL TRIM LIGHT	17
DOWNLIGHT ROUGH-IN PLATE	17
GIMBAL DOWNLIGHT	18
GIMBAL DOWNLIGHT RETROFIT	18

INDOOR FIXTURES

LINEAR

601 INTELLISENSE™ STRIPS	20
801 SELECTABLE STRIPS	20
810 DECORATIVE WRAP	21
SELECTABLE VAPOR TIGHT	21

PANELS

620 INTELLISENSE™ PANEL	22
821 SELECTABLE PANEL	22
822 SELECTABLE PANEL	23

TROFFERS

630 INTELLISENSE™ SINGLE BASKET TROFFER	24
---	----

LED READY

LED READY FIXTURES	24
------------------------------	----

HIGH BAYS

INTELLISENSE™ LINEAR HIGH BAY.	25
ROUND HIGH BAY.	26
ECONOMY ROUND HIGH BAY	26

OUTDOOR FIXTURES

AREA LIGHTS

VERSA AREA LIGHT	28
----------------------------	----

FLOODS

FLOOD LIGHT	30
-----------------------	----

CANOPY

CANOPY	30
------------------	----

WALL PACKS

MINI WALL PACK	31
WALL PACK	31
FULL CUTOFF WALL PACK	31

ARCHITECTURAL FIXTURES

GEOMETRIC WALL PACKS	32
HALF-MOON WALL PACKS	32
POST TOP	32
CYLINDER WALL MOUNT	33

BARN LIGHTS

DUSK TO DAWN BARN LIGHT	33
-----------------------------------	----

HAZARDOUS LIGHTING

CLASS 1 DIVISION 1 HAZARDOUS SERIES	34
CLASS 1 DIVISION 2 HAZARDOUS SERIES	35

SPORTS LIGHTING

SPORT LIGHT	36
-----------------------	----

EMERGENCY

EMG DRIVERS

EMERGENCY DRIVERS	40
EMERGENCY HOTSPOT	41
EMERGENCY COMPATIBILITY	42

CONTROLS

CONTROLS

STAND-ALONE CONTROLS.	44
INTELLISENSE™ CONTROLS	45

LAST CHANCE

GET 'EM BEFORE THEY'RE GONE	47
---------------------------------------	----

Lamps



ESL
VISION

LAMPS


SELECTABLE CL LAMP

The CL has evolved! ESL Vision's CL Series of lamps not only maintains its small and versatile form factor; it is now kelvin selectable as well. Choose from 3000K, 4000K or 5000K with a simple slide switch. The removable mogul base makes it a breeze to go from an E39 to E26.


- ✓ **BETTER PRICE**
Save an average of 23% per lamp over the competition!
- ✓ **BETTER OPTIONS**
Three kelvin options in a single lamp!
- ✓ **BETTER SOLUTION**
The best form factor with selectable kelvin!



**TWO WATTAGE
SELECTABLE SIZES**
9W—12W—18W
12W—18W—27W

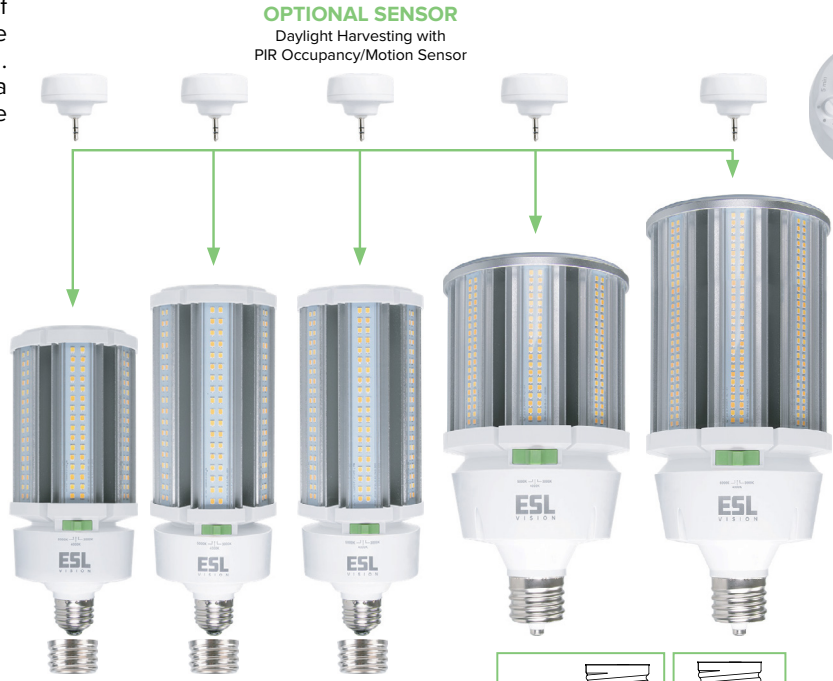

EXCLUSIVE
E39—E26 Adapter Included
with Lamps up to 55 Watts



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CL-0918W-53050-S-M	9W—12W—18W	3000K—4000K—5000K	2,615	145	120—277 VAC	16
ESL-CL-0918W-53050-EX39	9W—12W—18W		2,615	145	120—277 VAC	16
ESL-CL-1227W-53050-S-M	12W—18W—27W	3000K—4000K—5000K	2,915	145	120—277 VAC	16
ESL-CL-1227W-53050-EX39	12W—18W—27W		2,915	145	120—277 VAC	16

* 5000K Lumen and Efficacy data listed. See specification sheet for other kelvin information.



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CL-36W-53050-S-M	36W	3000K—4000K—5000K	4,680	130	120—277 VAC	16
ESL-CL-36W-53050-EX39	36W		4,680	130	120—277 VAC	16
ESL-CL-46W-53050-S-M	46W	3000K—4000K—5000K	5,850	127	120—277 VAC	16
ESL-CL-46W-53050-EX39	46W		5,850	127	120—277 VAC	16
ESL-CL-55W-53050-S-M	55W	3000K—4000K—5000K	7,020	127	120—277 VAC	16
ESL-CL-55W-53050-EX39	55W		7,020	127	120—277 VAC	16
ESL-CL-80W-53050-EX39	80W	3000K—4000K—5000K	10,400	130	120—277 VAC	6
ESL-CL-120W-53050-EX39	120W	3000K—4000K—5000K	15,600	130	120—277 VAC	6

* 5000K Lumen and Efficacy data listed. See specification sheet for other kelvin information.

FIELD INSTALLED ACCESSORIES

ESL-3DHOC-LV PIR occupancy/motion sensor for CL 5



A19 LAMP



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CASE QTY	
ESL-A19-6W-12750	6W	2700K—3000K—3500K—4000K—5000K	480	80	48	
ESL-A19-9W-12750	9W	2700K—3000K—3500K—4000K—5000K	800	89	48	
ESL-A19-11W-12750	11W	2700K—3000K—3500K—4000K—5000K	1,100	100	48	
ESL-A19-15W-12750	15W	2700K—3000K—3500K—4000K—5000K	1,600	107	48	
ESL-A19-9W-12750-GU24	9W	2700K—3000K—3500K—4000K—5000K	800	89	48	

BR LAMP



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CASE QTY	
ESL-BR20-6W-12750	6W	2700K—3000K—3500K—4000K—5000K	450	75	48	
ESL-BR30-8W-12750	8.5W	2700K—3000K—3500K—4000K—5000K	650	76	48	
ESL-BR40-13W-12750	13W	2700K—3000K—3500K—4000K—5000K	1,050	81	24	

PAR LAMP



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	CASE QTY	
ESL-PAR20-7W-12750	7W	2700K—3000K—3500K—4000K—5000K	500	71	48	
ESL-PAR30-10W-12750	10W	2700K—3000K—3500K—4000K—5000K	750	75	48	
ESL-PAR38-13W-12750	13W	2700K—3000K—3500K—4000K—5000K	1,050	81	24	

CHANDELIER LAMP



ITEM#	WATTAGE	KELVIN	LUMEN OUTPUT	EFFICACY (lm/w)	CASE QTY	
ESL-CANDLE-4W-130	4W	3000K	500	125	96	

TYPE B TUBES

The T8B is a direct line voltage tube suitable for single or double-ended wiring. This glass constructed tube has a shatterproof coating. ESL Vision has the most comprehensive line of Type B tubes in T8 or T5 sizes, include both selectable and non-selectable options, and offer a wide kelvin range.

T8 Selectable CCT



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	BASE	CASE QTY	PALLET QTY	
2 FOOT									
ESL-T8B2-7W-F13550	7W	3500K—4000K—5000K	950	136	120–277 VAC	G13	25	1,600	
ESL-T8B2-7W-F13065	7W	3000K—3500K—4000K—5000K—6500K	1,000	143	120–277 VAC	G13	25	1,600	
3 FOOT									
ESL-T8B3-12W-F13065	12W	3000K—3500K—4000K—5000K—6500K	1,550	129	120–277 VAC	G13	25	1,350	
4 FOOT									
ESL-T8B4-12W-F14065	12W	4000K—5000K—6500K	1,800	144	120–277 VAC	G13	25	1,350	
ESL-T8B4-12W-F13065	12W	3000K—3500K—4000K—5000K—6500K	1,800	144	120–277 VAC	G13	25	1,350	
ESL-T8B4-18W-F13065	18W	3000K—3500K—4000K—5000K—6500K	2,700	146	120–277 VAC	G13	25	1,350	
8 FOOT									
ESL-T8B8-38W-F14065	38W	4000K—5000K—6500K	5,400	142	120–277 VAC	Fa8	10	800	
ESL-T8B8-38W-F14065-R17D	38W	4000K—5000K—6500K	5,500	145	120–277 VAC	R17D	10	800	

T8 Non-Selectable



ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	BASE	CASE QTY	PALLET QTY	
4 FOOT									
ESL-T8B4-12W-F1xx	12W	(35) 3500K, (40) 4000K, (50) 5000K	1,850	154	120–277 VAC	G13	25	1,350	
ESL-T8B4-18W-F1xx	18W	(35) 3500K, (40) 4000K, (50) 5000K	2,750	153	120–277 VAC	G13	25	1,350	
8 FOOT									
ESL-T8B8-38W-F150	38W	5000K	5,500	142	120–277 VAC	Fa8	10	800	

T5 Selectable CCT



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	BASE	CASE QTY	PALLET QTY	
4 FOOT									
ESL-T5HOB4-25W-F14065	25W	4000K—5000K—6500K	3,500	140	120–277 VAC	G5	25	1,350	

TYPE AB TUBES

Type AB tubes work with or without the electronic ballast. The T8AB 2 foot, 4 foot and newly introduced U-Bends are glass constructed tubes with a shatterproof coating for safety. The T8BC is an industrial grade tube with aluminum construction for durability in the harshest conditions.

T8 Selectable CCT



G13

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	BASE	CASE QTY	PALLET QTY	
2 FOOT									
ESL-T8AB2-9W-F13065	9.5W	3000K—3500K— 4000K—5000K—6500K	1,450	153	120–277 VAC	G13	25	1,350	
4 FOOT									
ESL-T8AB4-12W-F13065	12.8W	3000K—3500K— 4000K—5000K—6500K	1,950	150	120–277 VAC	G13	25	1,350	

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL5-CLW-5W	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install
--------------------	---

T8 Non-Selectable



G13

T8BC Industrial Tube

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	BASE	CASE QTY	PALLET QTY	
4 FOOT									
ESL-T8AB4-12W-F1xx	12W	(35) 3500K, (40) 4000K, (50) 5000K	1,950	150	120–277 VAC	G13	25	1,350	
INDUSTRIAL GRADE									
2 FOOT									
ESL-T8BC2-8W-C250	8W	5000K	1,000	125	120–277 VAC	G13	25	1,600	
4 FOOT									
ESL-T8BC4-15W-C250	15W	5000K	1,875	125	120–277 VAC	G13	25	800	

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL5-CLW-5W	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install
--------------------	---

T8 U-Bend Selectable CCT



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	BASE	CASE QTY	PALLET QTY	
STANDARD									
ESL-T8UAB-13W-F13550	13W	3000K—3500K— 4000K—5000K—6500K	1,450	153	120–277 VAC	G13	24	800	
NARROW									
ESL-T8NUAB-13W-F13550	13W	3000K—3500K— 4000K—5000K—6500K	1,950	150	120–277 VAC	G13	24	800	

FIELD INSTALLED ACCESSORIES


ESL-EMG-SL5-CLW-5W	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install
--------------------	---



SO MANY TUBES!

ESL Vision offers a complete line of tubes for any application.

Available Bases:




Available Sizes:




Type B Wire Diagrams:

Type B tubes are direct line voltage, suitable for single or double-ended wiring.

Before Upgrade:




After Upgrade:




Type AB Wire Diagrams:

Type AB tubes work with or without the electronic ballast.

Before Upgrade:



After Upgrade:

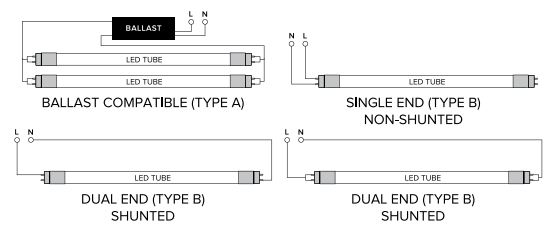

Pick Your Kelvin

	3000K	3500K	4000K	5000K	6500K
7 WATTS			ESL-T8B2-7W-F13550		
			ESL-T8B2-7W-F13065		
8 WATTS				ESL-T8BC2-8W-C250	
9 WATTS			ESL-T8AB2-9W-F13065		
			ESL-T8B3-12W-F13065		
			ESL-T8B4-12W-F13065		
12 WATTS			ESL-T8B4-12W-F14065		
		ESL-T8AB4-12W-F135	ESL-T8AB4-12W-F140	ESL-T8AB4-12W-F150	
		ESL-T8B4-12W-F135	ESL-T8B4-12W-F140	ESL-T8B4-12W-F150	
			ESL-T8AB4-12W-F13065		
13 WATTS			ESL-T8UAB-13W-F13550		
			ESL-T8NUAB-13W-F13550		
15 WATTS				ESL-T8BC4-15W-C250	
18 WATTS			ESL-T8B4-18W-F13065		
		ESL-T8B4-18W-F135	ESL-T8B4-18W-F140	ESL-T8B4-18W-F150	
25 WATTS				ESL-T5HOB4-25W-F14065	
38 WATTS				ESL-T8B8-38W-F14065	
				ESL-T8B8-38W-F14065-R17D	
				ESL-T8B8-38W-F150	
	2 FOOT	3 FOOT	4 FOOT	8 FOOT	U-BEND




Retrofits




MULTI-USE RETROFIT

ESL Vision's most versatile retrofit is the MUR (Multi-Use Retrofit). With multiple mounting options this can be used to retrofit a number of existing fixtures. Optional surge protection and occupancy sensors are available.

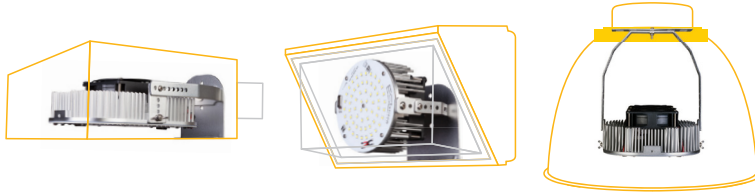


ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-MUR-45W-3xx	45W	(30) 3000K	5,778	128	120-277 VAC	8
ESL-MUR-45W-3xx-HV		(40) 4000K (50) 5000K	5,615	124	277-480 VAC	8
ESL-MUR-75W-3xx	75W	(30) 3000K	10,008	133	120-277 VAC	6
ESL-MUR-75W-3xx-HV		(40) 4000K (50) 5000K	9,949	133	277-480 VAC	6
ESL-MUR-105W-3xx	105W	(30) 3000K	13,901	132	120-277 VAC	6
ESL-MUR-105W-3xx-HV		(40) 4000K (50) 5000K	13,434	128	277-480 VAC	6
ESL-MUR-120W-3xx	120W	(30) 3000K	15,500	129	120-277 VAC	6
ESL-MUR-120W-3xx-HV		(40) 4000K (50) 5000K	15,138	126	277-480 VAC	6
ESL-MUR-150W-3xx	150W	(30) 3000K	20,520	137	120-277 VAC	6
ESL-MUR-150W-3xx-HV		(40) 4000K (50) 5000K	20,174	134	277-480 VAC	6
ESL-MUR-200W-3xx	200W	(30) 3000K	25,837	129	120-277 VAC	6
ESL-MUR-200W-3xx-HV		(40) 4000K (50) 5000K	25,475	127	277-480 VAC	6
ESL-MUR-280W-3xx	280W	(30) 3000K	40,004	143	120-277 VAC	4
ESL-MUR-280W-3xx-HV		(40) 4000K (50) 5000K	41,062	147	277-480 VAC	4
ESL-MUR-350W-3xx	350W	(30) 3000K	47,030	123	120-277 VAC	4
ESL-MUR-350W-3xx-HV		(40) 4000K (50) 5000K	49,194	123	277-480 VAC	4

* 5000K Lumen and Efficacy data listed. See specification sheet for other kelvin information.

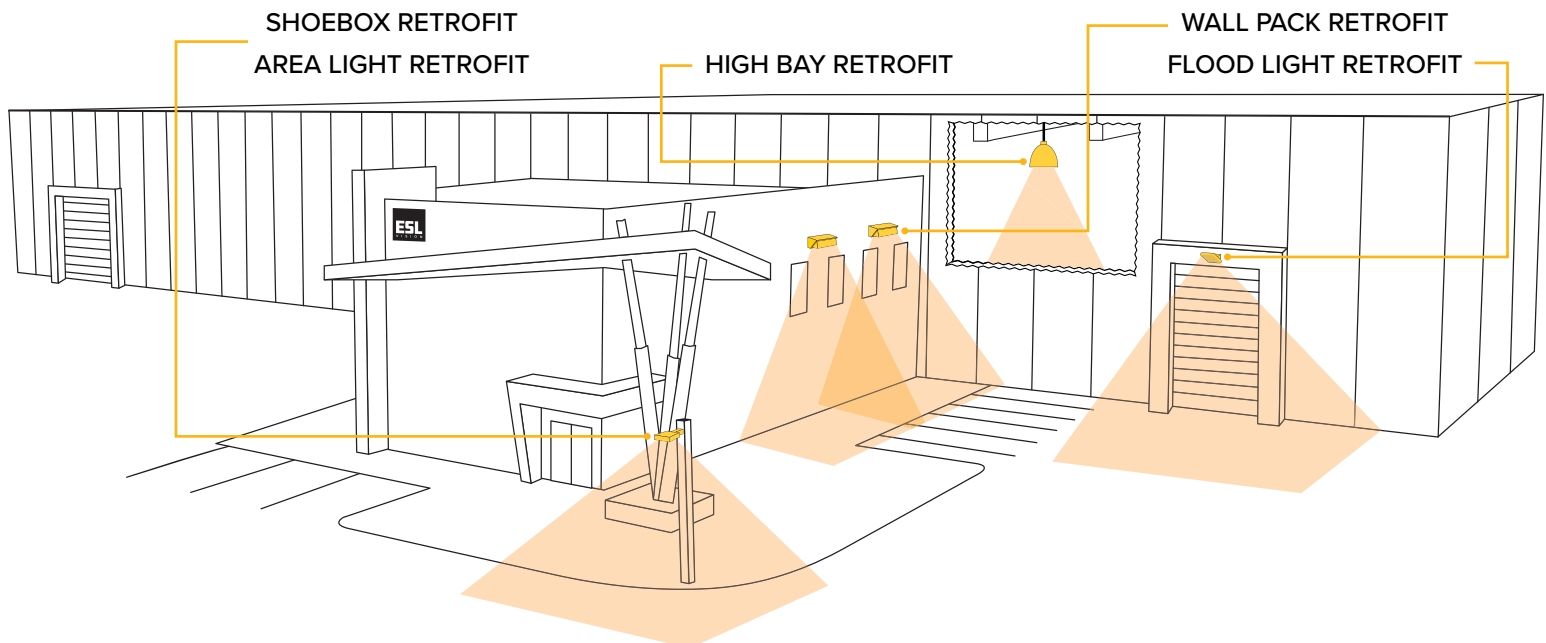

590 NM AMBER MULTI-USE RETROFIT

Reduce light pollution and adverse effects on wildlife with our 590NM MUR that emits no visible white light. Perfect retrofit for sensitive Dark Sky applications.



ITEM#	WATTAGE	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-MUR-45W-3-590NM	45W	3,473	90	120–277 VAC	8
ESL-MUR-45W-3-590NM-HV				277–480 VAC	8
ESL-MUR-75W-3-590NM	75W	6,014	90	120–277 VAC	6
ESL-MUR-75W-3-590NM-HV				277–480 VAC	6
ESL-MUR-105W-3-590NM	105W	8,600	90	120–277 VAC	6
ESL-MUR-105W-3-590NM-HV				277–480 VAC	6
ESL-MUR-120W-3-590NM	120W	9,720	90	120–277 VAC	6
ESL-MUR-120W-3-590NM-HV				277–480 VAC	6
ESL-MUR-150W-3-590NM	150W	12,150	90	120–277 VAC	6
ESL-MUR-150W-3-590NM-HV				277–480 VAC	6
ESL-MUR-200W-3-590NM	200W	16,000	90	120–277 VAC	6
ESL-MUR-200W-3-590NM-HV				277–480 VAC	6

FIELD INSTALLED ACCESSORIES FOR MUR AND AMBER MUR


ESL-SPD-300V-10KV-1	Hard-wired surge protector; (100–300 VAC) maximum discharge current: 10kA
ESL-SPD-480V-10KV-1	Hard-wired surge protector; (480 VAC) maximum discharge current: 10kA
ESL-480V-SD01	480V step-down transformer
ESL-4OCC-LDD	Occupancy sensor, on/off control, 50% step dimming for 30/60W, 8'–20' mounting
ESL-REM-100	Hand-held remote

Check This Out!

SELECTABLE VAPOR TIGHT

A VAPOR TIGHT THAT'S EASY TO INSTALL? YEP!

Get ready for the most versatile and easy to install Vapor Tight yet! Available in 3 sizes, they are all kelvin and wattage selectable and feature durable, tamper-resistant stainless steel hardware.

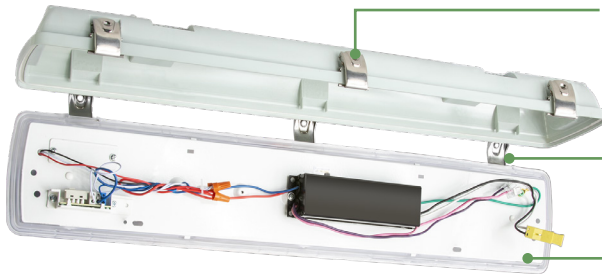

CONSTRUCTION

- Fully gasketed, polycarbonate housing
- Stainless steel latches and mounting hardware

INSTALLATION

- Hinged assembly for single-person installation and easy maintenance

OPTICS

- UV stabilized, high impact translucent lens for maximum light output
- Integrated lens and LED module board



640 INTELLISENSE™ SINGLE BASKET TROFFER RETROFIT

NEW!

ESL Vision's new IntelliSense™ series of fixtures feature a built-in receptacle for simple plug-n-play controls. Add simple occupancy and daylight harvesting features with our SoloSense™ remote operated controls, or network controls with our app operated MultiSense™ Bluetooth controls.



INTELLISENSE™

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY	
ESL-ISS-640-14-2030W-3550K	20W—25W—30W	3500K—4000K—5000K	4,500	150	120–277 VAC	64	
ESL-ISS-640-22-2030W-3550K	25W—30W—35W	3500K—4000K—5000K	4,500	150	120–277 VAC	64	
ESL-ISS-640-24-2040W-3550K	25W—30W—35W	3500K—4000K—5000K	5,250	150	120–277 VAC	30	

FACTORY INSTALLED OPTIONS

EM5	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install (SL3)
EM9	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)

FIELD INSTALLED ACCESSORIES

ESL-EMG-KIT1-8W	Emergency backup battery kit unit, 8-watt output, 90-minute minimum, 100–277VAC input, high efficacy LED module with 1,200 lm output power
ESL-ISS-SSEN-01	SoloSense™ plug and play 4 wire stand alone PIR + daylight harvesting sensor for 600 series
ESL-ISS-REM-01	SoloSense™ remote
ESL-ISS-MSEN-01	MultiSense™ plug and play 4 wire network PIR + daylight harvesting sensor 600 series
ESL-ISS-PP-01	MultiSense™ network zone controller AC 120–277 VAC 20A
ESL-ISS-WS-B3B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-WS-A3B-01	MultiSense™ network wall switch AC powered 3 buttons
ESL-ISS-WS-B8B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-EMG-LC-01	MultiSense™ network AC emergency lighting controller 120–277 VAC UL924
ESL-ISS-MSEN-06	IntelliSense™ MultiSense™ with PIR Occupancy and Daylight Harvesting, indoor use as ceiling sensor, IP20
ESL-ISS-GTW-01	MultiSense™ network ceiling sensor real time clock & energy monitoring dongle

860 SELECTABLE STRIP RETROFIT

Upgrade an existing strip housing with the 860 Series Selectable Strip Retrofit. The 860 fixtures are all kelvin and wattage selectable and are easily adjusted with a dip switch.

Sold in
PAIRS

8-foot ships in a 4-foot box!



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY	
4' STRIP RETROFIT KIT — 2 FIXTURES PER BOX, SOLD IN PAIRS							
ESL-CSS-860-4-2240W-3550K	22W—30W—40W	3500K—4000K—5000K	5,200	130	120–277 VAC	80	
8' STRIP RETROFIT KIT							
ESL-CSS-860-8-4575W-3550K	45W—60W—75W	3500K—4000K—5000K	9,750	130	120–277 VAC	40	

FACTORY INSTALLED OPTIONS

EM5	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install (SL3)
EM9	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)
40CC	Occupancy sensor, on/off control, 50% step dimming for 30/60W, 8 to 20-foot mounting


FIELD INSTALLED ACCESSORIES

ESL-REM-100	Hand-held remote
-------------	------------------

Premier

PRODUCTS AND SERVICE

Driven by innovation and customer service, ESL Vision has an in-house production line to customize fixtures in just days, not weeks. We are a step ahead of the crowd with a large selection of adjustable and network controlled fixtures and control options. Keeping everyone in mind from the installer to the end-user, our solutions are easy to install and appeal to any aesthetic.



Downlights



SLIM DOWNLIGHT (WAFER)

The latest Wafer Series is 5 CCT field selectable, 120V Triac dimmable and has an expanded offering of sizes and trim kits, sure to suit any interior.

Field Installable Trim Kits: Black, Bronze, Copper & Brushed Nickel




ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY
3" ROUND							
ESL-WFR-R3-6W-32750-WH	6W	2700K—3000K—3500K—4000K—5000K	442	74	120 VAC	18	1,350
4" ROUND							
ESL-WFR-R4-9W-32750-WH	9W	2700K—3000K—3500K—4000K—5000K	637	71	120 VAC	12	768
6" ROUND							
ESL-WFR-R6-12W-32750-WH	12W	2700K—3000K—3500K—4000K—5000K	1,026	86	120 VAC	12	540

FIELD INSTALLED ACCESSORIES

ESL-WFR3-3-Tff	3-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-4-Tff	4-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-6-Tff	6-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-RDL-4-RKIT-001	4-inch new construction pre-mounting plate
ESL-RDL-6-RKIT-001	6-inch new construction pre-mounting plate
ESL-WFR3-EXT-10FT	10-foot long extension wire
ESL-WFR3-EXT-20FT	20-foot long extension wire

OPTUS COMMERCIAL CAN

ESL Vision's Optus Series of fixtures are both kelvin and wattage selectable, offering the utmost in versatility. The four sizes each feature 3 lumen levels and 4 kelvin settings. The 24" flexible MC whip with cable snap connector makes installation fast and easy.

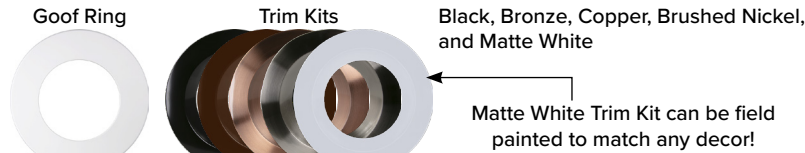

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY
ESL-OPT-4-0712W-23050K	7W—9W—12W	3000K—3500K—4000K—5000K	1,000	89	120—277 VAC	4	480
ESL-OPT-6-0919W-23050K	9W—12W—19W	3000K—3500K—4000K—5000K	2,000	105	120—277 VAC	4	360
ESL-OPT-8-1129W-23050K	11W—19W—29W	3000K—3500K—4000K—5000K	3,000	105	120—277 VAC	4	160
ESL-OPT-10-1836W-23050K	18W—27W—36W	3000K—3500K—4000K—5000K	4,000	111	120—277 VAC	4	120

FACTORY INSTALLED OPTIONS

EM8	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100—347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery. (SL6)
-----	--

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL6-CSC-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100—347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.
ESL-OPT2-4-Tff	4-inch Optus field installable trim kit
ESL-OPT2-6-Tff	6-inch Optus field installable trim kit
ESL-OPT2-8-Tff	8-inch Optus field installable trim kit
ESL-OPT2-10-Tff	10-inch Optus field installable trim kit
ESL-OPT2-4-RING	4 to 6-inch Extender goof ring
ESL-OPT2-6-RING	6 to 8-inch Extender goof ring
ESL-OPT2-8-RING	8 to 10-inch Extender goof ring
ESL-OPT2-10-RING	10 to 12-inch Extender goof ring
ESL-RDL-4-RKIT-001	4-inch new construction pre-mounting plate
ESL-RDL-6-RKIT-001	6-inch new construction pre-mounting plate
ESL-RDL-8-RKIT-001	8-inch new construction pre-mounting plate

Finishes: ff = Trim Color: Black (BK), (BZ) Bronze, Copper (CP), Brushed Nickel (BN), Matte White (MW)

Copyright © 2024 ESL Vision, LLC. All rights reserved. Rev: 08/14/2024



888.493.5559



info@eslvision.com




www.eslvision.com

DISK

ESL Vision's LED DISK Series features 5CCT kelvin selectability for effortless adjustment of the color temperature. We've gone the extra mile to provide unmatched quality, incorporating details purposefully designed to enhance long-term performance and ensure a seamless and hassle-free installation.

Available in White or Bronze finishes.

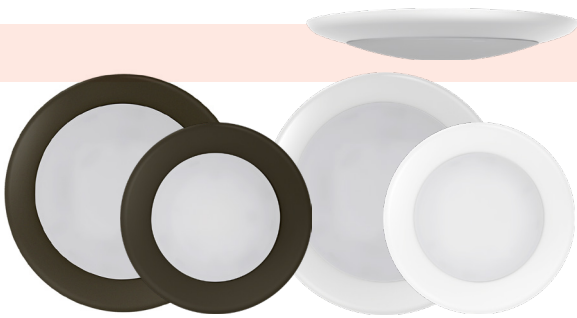



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY	
4" ROUND								
ESL-DSK-4-10W-42750	10W	2700K—3000K—3500K—4000K—5000K	650	65	120 VAC	24	1,260	
ESL-DSK-4-10W-42750-BZ			650	65	120 VAC	24	1,260	
6" ROUND								
ESL-DSK-6-15W-42750	15W	2700K—3000K—3500K—4000K—5000K	1,100	67	120 VAC	24	864	
ESL-DSK-6-15W-42750-BZ			1,100	67	120 VAC	24	864	

5CCT OCCUPANCY DISK

This LED Occupancy Disk has the same slim, driver on-board design as the LED Disk with a built-in PIR motion sensor and five kelvin selections. Save energy with the selectable time delay dip switch. The extra thick foam insert protects against bugs and provides an extra buffer for textured or uneven surfaces. Suitable for ceiling or wall mount installations.




ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY
6" ROUND							
ESL-ODSK-6-15W-12750-DA	15W	2700K—3000K—3500K—4000K—5000K	1,100	73	120 VAC	24	864

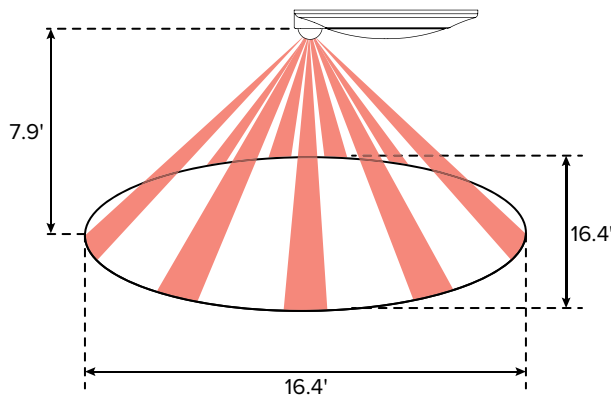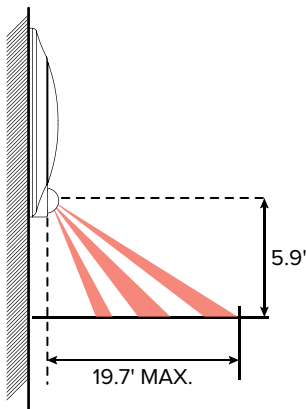


5CCT DECORATIVE DISKS

The Decorative Disk Series (DDSK) features a slim, low-profile design that helps modernize any room. An edge-lit design and glare control diffuser provides an optimal light distribution. The new DDSK also boasts the addition of a multi-volt Dual Dimming model which has both Triac and 0–10V Dimming.



Kelvin Selectable Switch

Quick-Connect Battery




Field Installable Trim Kits Match Any Decor

Black, Bronze, Brushed Nickel, Copper and Matte White



Matte White bezel
can be field painted
to match any decor!

Emergency and Standard DDSKs have the same profile and sleek design



Built-In EMG Test Button



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	DIM	CASE QTY	PALLET QTY
5" ROUND								
ESL-DDSK-R5-11W-12750	11.5W	2700K–3000K–3500K–4000K–5000K	700	61	120 VAC	TRIAC	12	900
ESL-DDSK-R5-11W-12750-MV	11.5W	2700K–3000K–3500K–4000K–5000K	700	61	120–277	DUAL	12	900
5" SQUARE								
ESL-DDSK-S5-11W-12750	11.5W	2700K–3000K–3500K–4000K–5000K	700	61	120 VAC	TRIAC	12	900
7" ROUND								
ESL-DDSK-R7-14W-12750	14W	2700K–3000K–3500K–4000K–5000K	840	73	120 VAC	TRIAC	12	648
ESL-DDSK-R7-14W-12750-EMG	14W	2700K–3000K–3500K–4000K–5000K	840	73	120 VAC	TRIAC	8	648
ESL-DDSK-R7-14W-12750-MV	14W	2700K–3000K–3500K–4000K–5000K	840	73	120–277	DUAL	12	648
ESL-DDSK-R7-14W-12750-MV-EMG	14W	2700K–3000K–3500K–4000K–5000K	840	73	120–277	DUAL	8	648
7" SQUARE								
ESL-DDSK-S7-14W-12750	14W	2700K–3000K–3500K–4000K–5000K	840	73	120 VAC	TRIAC	12	648
9" ROUND								
ESL-DDSK-R9-20W-12750	20W	2700K–3000K–3500K–4000K–5000K	1,260	63	120 VAC	TRIAC	8	400
ESL-DDSK-R9-20W-12750-EMG	20W	2700K–3000K–3500K–4000K–5000K	1,260	63	120 VAC	TRIAC	8	400
ESL-DDSK-R9-20W-12750-MV	20W	2700K–3000K–3500K–4000K–5000K	1,260	63	120–277	DUAL	8	400
9" SQUARE								
ESL-DDSK-S9-20W-12750	20W	2700K–3000K–3500K–4000K–5000K	1,260	63	120 VAC	TRIAC	8	400
11" ROUND								
ESL-DDSK-R11-25W-12750	25W	2700K–3000K–3500K–4000K–5000K	1,680	67	120 VAC	TRIAC	8	320
11" SQUARE								
ESL-DDSK-S11-25W-12750	25W	2700K–3000K–3500K–4000K–5000K	1,680	67	120 VAC	TRIAC	8	320

FIELD INSTALLED ACCESSORIES

ESL-DDSK1-R5-Tff	5-inch round DDSK field installable trim kit
ESL-DDSK1-R7-Tff	7-inch round DDSK field installable trim kit
ESL-DDSK1-R9-Tff	9-inch round DDSK field installable trim kit
ESL-DDSK1-R11-Tff	11-inch round DDSK field installable trim kit

Finishes: ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP), Matte White (MW)

*Contact ESL Representative for more information regarding lead times for Square Trim Kits and options for EMG units.




RESIDENTIAL TRIM LIGHT

Upgrading any existing can to a kelvin selectable LED fixture is as easy as 1—2—3 with our new Residential Trim Lights! It's as simple to install as a light bulb — no tools required.

Field Installable Trim Kits Match Any Decor

Black, Brushed Nickel, and Copper



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY	
4" ROUND								
ESL-RTLB-4-10W-12750-WH	10W	2700K—3000K—3500K—4000K—5000K	780	78	120 VAC	36	756	
ESL-RTLS-4-10W-12750-WH			780	78	120 VAC	36	756	
6" ROUND								
ESL-RTLB-6-15W-12750-WH	15W	2700K—3000K—3500K—4000K—5000K	1,200	80	120 VAC	36	360	
ESL-RTLS-6-15W-12750-WH			1,200	80	120 VAC	36	360	





FIELD INSTALLED ACCESSORIES

ESL-RTLS-4-Tff	Trim for RTL, smooth bevel, 4-inch
ESL-RTLB-4-Tff	Trim for RTL, baffled bevel, 4-inch
ESL-RTLS-6-Tff	Trim for RTL, smooth bevel, 6-inch
ESL-RTLB-6-Tff	Trim for RTL, baffled bevel, 6-inch

Finishes: ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN)

DOWNLIGHT ROUGH-IN PLATE

The Rough-in Plate is ideal for new construction, pre-wiring or easy layout planning. Sturdy cold rolled steel construction fits up to 24" stud/joist spacings and allows for safe installation of the fixture & driver. Compatible with the Wafer, Optus and CCR.

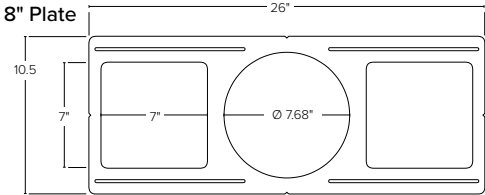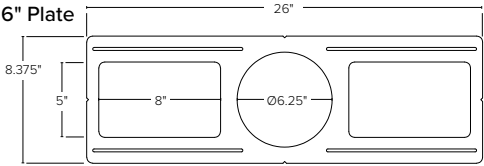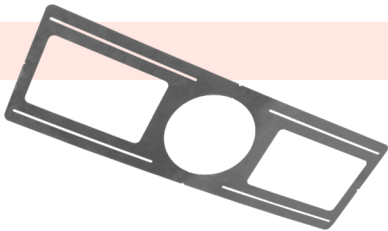

ITEM#	DESCRIPTION	DIMENSIONS	
ESL-RDL-4-RKIT-001	4" New construction pre-mounting plate	26" x 9.375" x 0.125"	
ESL-RDL-6-RKIT-001	6" New construction pre-mounting plate	26" x 8.375" x 0.125"	
ESL-RDL-8-RKIT-001	8" New construction pre-mounting plate	26" x 10.50" x 0.125"	

*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2024 ESL Vision, LLC. All rights reserved. Rev: 08/14/2024

GIMBAL DOWNLIGHT

COMING
SOON

Discover the perfect flush-mount ceiling fixture to enhance any space. Designed to seamlessly match our other downlight offerings, these fixtures tilt 90 degrees and rotate up to 360 degrees, making them ideal for highlighting art or brightening dark corners. Durable, efficient, and adaptable, ESL Vision Gimbals bring dynamic lighting possibilities to our downlight collection.



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY	
4" ROUND								
ESL-GBL-4-9W-12750-WH	9W	2700K—3000K—3500K— 4000K—5000K	955	107	120 VAC	24	864	
ESL-GBL-4-9W-12750-BK			955	107	120 VAC	24	864	
6" ROUND								
ESL-GBL-6-12W-12750-WH	12W	2700K—3000K—3500K— 4000K—5000K	1,240	138	120 VAC	24	360	
ESL-GBL-6-12W-12750-BK			1,240	138	120 VAC	24	360	

GIMBAL DOWNLIGHT RETROFIT

COMING
SOON

For those looking to upgrade existing lighting, our Gimbal Retrofit kit is the ideal solution. It includes all the features of the Gimbal in a convenient kit that retrofits nearly any E26 ceiling can. With a specialized mounting bracket and E26 adapter, transforming your current setup into a versatile, high-performance lighting system has never been easier.



ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY	PALLET QTY	
4" ROUND								
ESL-GBLR-4-10W-12750-WH	10W	2700K—3000K—3500K— 4000K—5000K	720	80	120 VAC	24	864	
ESL-GBLR-4-10W-12750-BK			720	80	120 VAC	24	864	
6" ROUND								
ESL-GBLR-6-16W-12750-WH	16W	2700K—3000K—3500K— 4000K—5000K	1,200	100	120 VAC	24	288	
ESL-GBLR-6-16W-12750-BK			1,200	100	120 VAC	24	288	

New!

5CCT DECORATIVE DISK

ESL Vision brings you the most complete series of Decorative Disks ever. The new 5 CCT Selectable Kelvin DDSK Series is available in 120V Triac Dimming.

Field Installable Trim





Kelvin Selectable Switch



Built-in Occupancy



Built-in Emergency

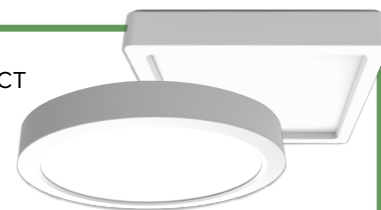

Indoor Fixtures



601 INTELLISENSE™ STRIPS

NEW!



ESL Vision's new IntelliSense™ series of fixtures feature a built-in receptacle for simple plug-n-play controls. Add simple occupancy and daylight harvesting features with our SoloSense™ remote operated controls, or network controls with our app operated MultiSense™ Bluetooth controls.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
2' SELECTABLE STRIP FIXTURE						
ESL-ISS-601-2-1525W-3550K	15W—20W—25W	3500K—4000K—5000K	3,750	150	120–277 VAC	6
4' SELECTABLE STRIP FIXTURE						
ESL-ISS-601-4-2040W-3550K	20W—30W—40W	3500K—4000K—5000K	6,000	150	120–277 VAC	6
8' SELECTABLE STRIP FIXTURE						
ESL-ISS-601-8-3055W-3550K	30W—40W—55W	3500K—4000K—5000K	8,250	150	120–277 VAC	4
ESL-ISS-601-8-70100W-3550K	70W—85W—100W	3500K—4000K—5000K	15,000	150	120–277 VAC	4

FACTORY INSTALLED OPTIONS

EM5	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install (SL3-CLW)
EM9	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)

FIELD INSTALLED ACCESSORIES

ESL-ACCS-WG-2FT-01	601 strip wireguard for 2-foot
ESL-ACCS-WG-4FT-01	601 strip wireguard for 4-foot and 8-foot
ESL-ACCS-JCVH-3FT-S2	Jack Chain with V-hooks, 3 feet, set of 2
ESL-ACCS-JCVH-3FT-S3	Jack Chain with V-hooks, 3 feet, set of 3
ESL-ACCS-AC-10FT-S2	3M adjustable aircraft cable kit, 10 feet, set of 2
ESL-ACCS-AC-10FT-S3	3M adjustable aircraft cable kit, 10 feet, set of 3
ESL-ACCS-CRA-01	Connecting piece for runs

INTELLISENSE™ ACCESSORIES

ESL-ISS-SSEN-01	SoloSense™ plug and play 4 wire stand alone PIR + daylight harvesting sensor for 600 series
ESL-ISS-REM-01	SoloSense™ remote
ESL-ISS-MSEN-01	MultiSense™ plug and play 4 wire network PIR + daylight harvesting sensor 600 series
ESL-ISS-PP-01	MultiSense™ network zone controller AC 120–277 VAC 20A
ESL-ISS-WS-B3B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-WS-A3B-01	MultiSense™ network wall switch AC powered 3 buttons
ESL-ISS-WS-B8B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-EMG-LC-01	MultiSense™ network AC emergency lighting controller 120–277 VAC UL924
ESL-ISS-MSEN-06	IntelliSense™ MultiSense™ with PIR Occupancy and Daylight Harvesting, indoor use as ceiling sensor, IP20
ESL-ISS-GTW-01	MultiSense™ network ceiling sensor real time clock & energy monitoring dongle

801 SELECTABLE STRIPS

The 801 Selectable Strip is kelvin and wattage selectable utilizing a simple dip switch to select the perfect color temperature for any setting.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CSS-801-2-1525W-3050K	15W—20W—25W	3000K—4000K—5000K	3,250	130	120–277 VAC	6
ESL-CSS-801-4-3445W-3050K	34W—38W—45W	3000K—4000K—5000K	5,850	130	120–277 VAC	6
ESL-CSS-801-8-6590W-3050K	65W—75W—90W	3000K—4000K—5000K	11,700	130	120–277 VAC	4

FACTORY INSTALLED OPTIONS

EM5	NOT AVAILABLE FOR 2 FOOT FIXTURE. Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install (SL3-CLW)
EM9	NOT AVAILABLE FOR 2 FOOT FIXTURE. Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)
5DHOC	Bi-Level daylight harvesting and occupancy microwave sensor 12V–24 VDC


FIELD INSTALLED ACCESSORIES

ESL-ACCS-JCVH-3FT-S2	Jack Chain with V-hooks, 3 feet, set of 2
ESL-ACCS-JCVH-3FT-S3	Jack Chain with V-hooks, 3 feet, set of 3
ESL-ACCS-AC-10FT-S2	3M adjustable aircraft cable kit, 10 feet, set of 2
ESL-ACCS-AC-10FT-S3	3M adjustable aircraft cable kit, 10 feet, set of 3



810 DECORATIVE WRAP

The ESL 810 Series is both kelvin and wattage selectable and features an innovative, cost-saving design with easy installation.

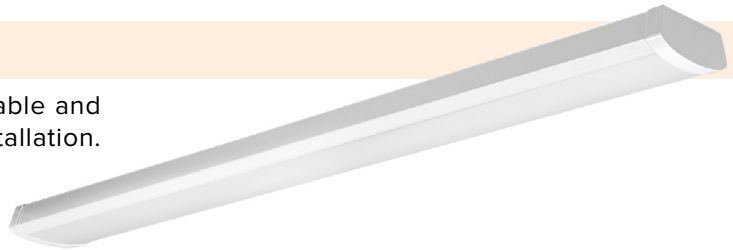

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CSS-810-4-3248W-3550K	32W—40W—48W	3500K—4000K—5000K	5,520	115	120–277 VAC	4


FACTORY INSTALLED OPTIONS

EM9	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)
1DHOC	Stand alone daylight harvesting and occupancy sensor. Use REM-100 for programming

SELECTABLE VAPOR TIGHT

The latest Vapor Tight in ESL Vision's lineup is the most versatile yet! Available in 3 sizes, they are all kelvin and wattage selectable and feature durable, tamper-resistant stainless steel hardware. The hinged design of the lens makes single-person installation a breeze!

Installation Made Easy!

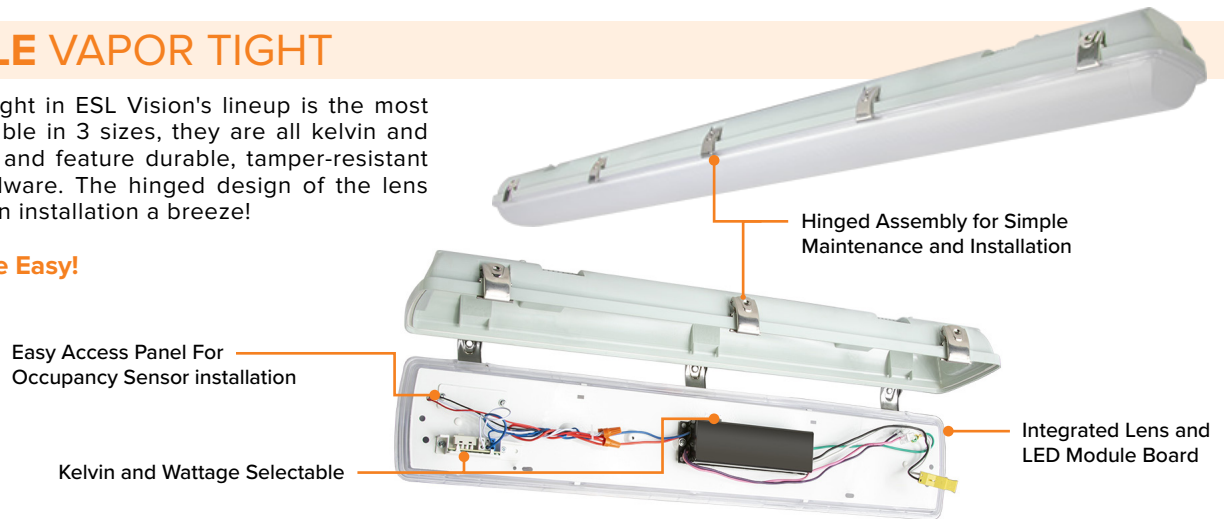

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
2 FOOT						
ESL-VP2-2030W-13050	20W—25W—30W	3000K—4000K—5000K	3,900	130	120–277 VAC	4
4 FOOT						
ESL-VP4-3854W-13050	38W—46W—54W	3000K—4000K—5000K	7,020	130	120–277 VAC	4
8 FOOT						
ESL-VP8-6590W-13050	65W—75W—90W	3000K—4000K—5000K	11,700	130	120–277 VAC	4

FACTORY INSTALLED OPTIONS

EM5	NOT AVAILABLE FOR 2 FOOT FIXTURE. Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install (SL3)
EM9	NOT AVAILABLE FOR 2 FOOT FIXTURE. Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Ttl 20 (SL1-OTB)
5DHOC	Bi-Level daylight harvesting and occupancy microwave sensor 12V–24 VDC

FIELD INSTALLED ACCESSORIES

ESL-ACCS-JCVH-3FT-S2	Jack Chain with V hooks, 3-feet
ESL-ACCS-JCVH-3FT-S3	Jack Chain with V-hooks, 3-feet
ESL-ACCS-AC-10FT-S2	3M adjustable aircraft cable kit, set of 2, 10-feet
ESL-ACCS-AC-10FT-S3	3M adjustable aircraft cable kit, set of 2, 10-feet
ESL-REM-100	Hand-held remote




620 INTELLISENSE™ PANEL

NEW!

INTELLISENSE™

ESL Vision's new IntelliSense™ enabled panel is kelvin and wattage selectable and features a built-in receptacle for easy field installation of the SoloSense™ and MultiSense™ controls.

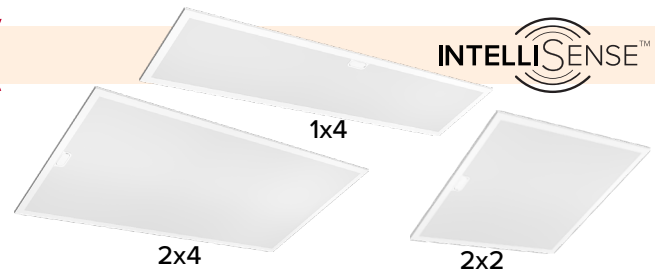

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY	
ESL-ISS-620-14-1525W-3550K	15W—20W—25W	3500K—4000K—5000K	3,750	150	120—277 VAC	96	
ESL-ISS-620-22-1525W-3550K	15W—20W—25W	3500K—4000K—5000K	3,750	150	120—277 VAC	96	
ESL-ISS-620-24-2040W-3550K	20W—30W—40W	3500K—4000K—5000K	6,000	150	120—277 VAC	48	

FACTORY INSTALLED OPTIONS

EM8	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100—347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery. (SL6)
-----	--

FIELD INSTALLED ACCESSORIES

ESL-ACCS-14-SMK-02	Surface mount kit for 1x4
ESL-ACCS-22-SMK-02	Surface mount kit for 2x2
ESL-ACCS-24-SMK-02	Surface mount kit for 2x4
ESL-ACCS-14-FLK-01	Flange mount kit for 1x4
ESL-ACCS-22-FLK-01	Flange mount kit for 2x2
ESL-ACCS-24-FLK-01	Flange mount kit for 2x4
ESL-ACCS-ACHK-S2	Aircraft hanging kit, 10-ft


INTELLISENSE™ ACCESSORIES

ESL-ISS-SSEN-01	SoloSense™ plug and play 4 wire stand alone PIR + daylight harvesting sensor for 600 series
ESL-ISS-REM-01	SoloSense™ remote
ESL-ISS-MSEN-01	MultiSense™ plug and play 4 wire network PIR + daylight harvesting sensor 600 series
ESL-ISS-PP-01	MultiSense™ network zone controller AC 120—277 VAC 20A
ESL-ISS-WS-B3B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-WS-A3B-01	MultiSense™ network wall switch AC powered 3 buttons
ESL-ISS-WS-B8B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-EMG-LC-01	MultiSense™ network AC emergency lighting controller 120—277 VAC UL924
ESL-ISS-MSEN-06	IntelliSense™ MultiSense™ with PIR Occupancy and Daylight Harvesting, indoor use as ceiling sensor, IP20
ESL-ISS-GTW-01	MultiSense™ network ceiling sensor real time clock & energy monitoring dongle

821 SELECTABLE PANEL

The back-lit Selectable Panel is both kelvin and wattage selectable which makes it perfect for multiple applications.

Sold in sets of two (2) per box (4 per case)

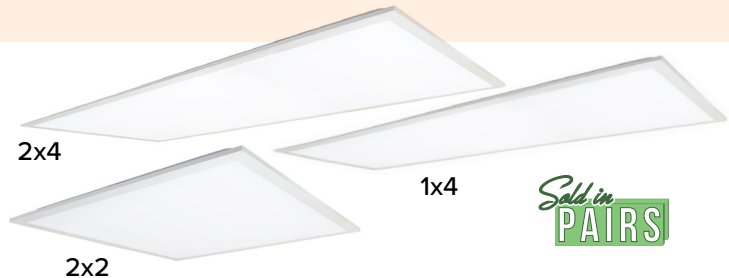

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY	
1x4 SELECTABLE PANEL — 2 FIXTURES PER BOX							
ESL-CSS-821-14-2030W-3550K	20W—25W—30W	3500K—4000K—5000K	3,750	125	120—277 VAC	96	
2x2 SELECTABLE PANEL — 2 FIXTURES PER BOX							
ESL-CSS-821-22-2030W-3550K	20W—25W—30W	3500K—4000K—5000K	3,750	125	120—277 VAC	96	
2x4 SELECTABLE PANEL — 2 FIXTURES PER BOX							
ESL-CSS-821-24-3040W-3550K	30W—35W—40W	3500K—4000K—5000K	5,040	125	120—277 VAC	48	
ESL-CSS-821-24-4060W-3550K	40W—50W—60W	3500K—4000K—5000K	7,500	125	120—277 VAC	48	

FACTORY INSTALLED OPTIONS

EM8	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100—347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery. (SL6-CSC)
-----	--

FIELD INSTALLED ACCESSORIES


ESL-CSS-821-22-SMK	821 Panel surface mount kit for 2x2
ESL-CSS-821-24-SMK	821 Panel surface mount kit for 2x4
ESL-CSS-821-14-SMK	821 Panel surface mount kit for 1x4
ESL-ACCS-22-FLK-01	Flange kits for 2x2
ESL-ACCS-24-FLK-01	Flange kits for 2x4
ESL-ACCS-14-FLK-01	Flange kits for 1x4
ESL-ACCS-ACHK-S2	Aircraft hanging kit



822 SELECTABLE PANEL

The back-lit Selectable Panel is both kelvin and wattage selectable which makes it perfect for multiple applications.

Sold in sets of two (2) per box

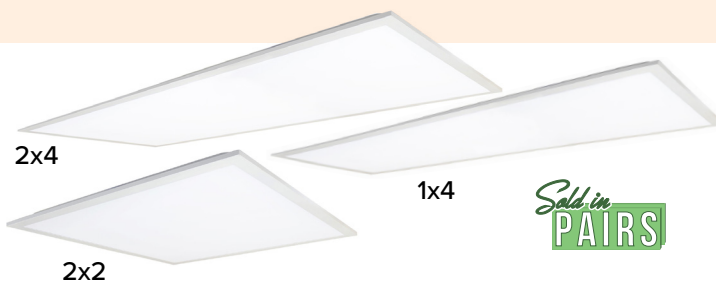

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
1x4 SELECTABLE PANEL — 2 FIXTURES PER BOX						
ESL-CSS-822-14-2030W-3550K	20W—25W—30W	3500K—4000K—5000K	3,750	125	120–277 VAC	96
2x2 SELECTABLE PANEL — 2 FIXTURES PER BOX						
ESL-CSS-822-22-2030W-3550K	20W—25W—30W	3500K—4000K—5000K	3,750	125	120–277 VAC	96
2x4 SELECTABLE PANEL — 2 FIXTURES PER BOX						
ESL-CSS-822-24-3040W-3550K	30W—35W—40W	3500K—4000K—5000K	5,040	125	120–277 VAC	48

FACTORY INSTALLED OPTIONS

EM15	Emergency backup battery unit, auto test function, 15-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, enclosed box, UL listed for factory or field install, Li-ion battery. (SL6-JB)
------	---


FIELD INSTALLED ACCESSORIES

ESL-ACCS-14-SMK-01	821 Panel surface mount kit for 1x4
ESL-ACCS-22-SMK-01	821 Panel surface mount kit for 2x2
ESL-ACCS-24-SMK-01	821 Panel surface mount kit for 2x4
ESL-ACCS-14-FLK-01	Flange kits for 1x4
ESL-ACCS-22-FLK-01	Flange kits for 2x2
ESL-ACCS-24-FLK-01	Flange kits for 2x4
ESL-ACCS-ACHK-S2	Aircraft hanging kit

New!

EASY TO INSTALL EMG FOR THE 822 PANEL

Discover ESL Vision's latest innovation in EMG technology. Tailored for contractors, this EMG-SL6-JB battery backup combines time and cost efficiency with the reliable safety features you need. The exclusive OpenAccess Wiring Chamber and pre-wired flexible conduit simplifies installation, and redefines ease of use in the field.

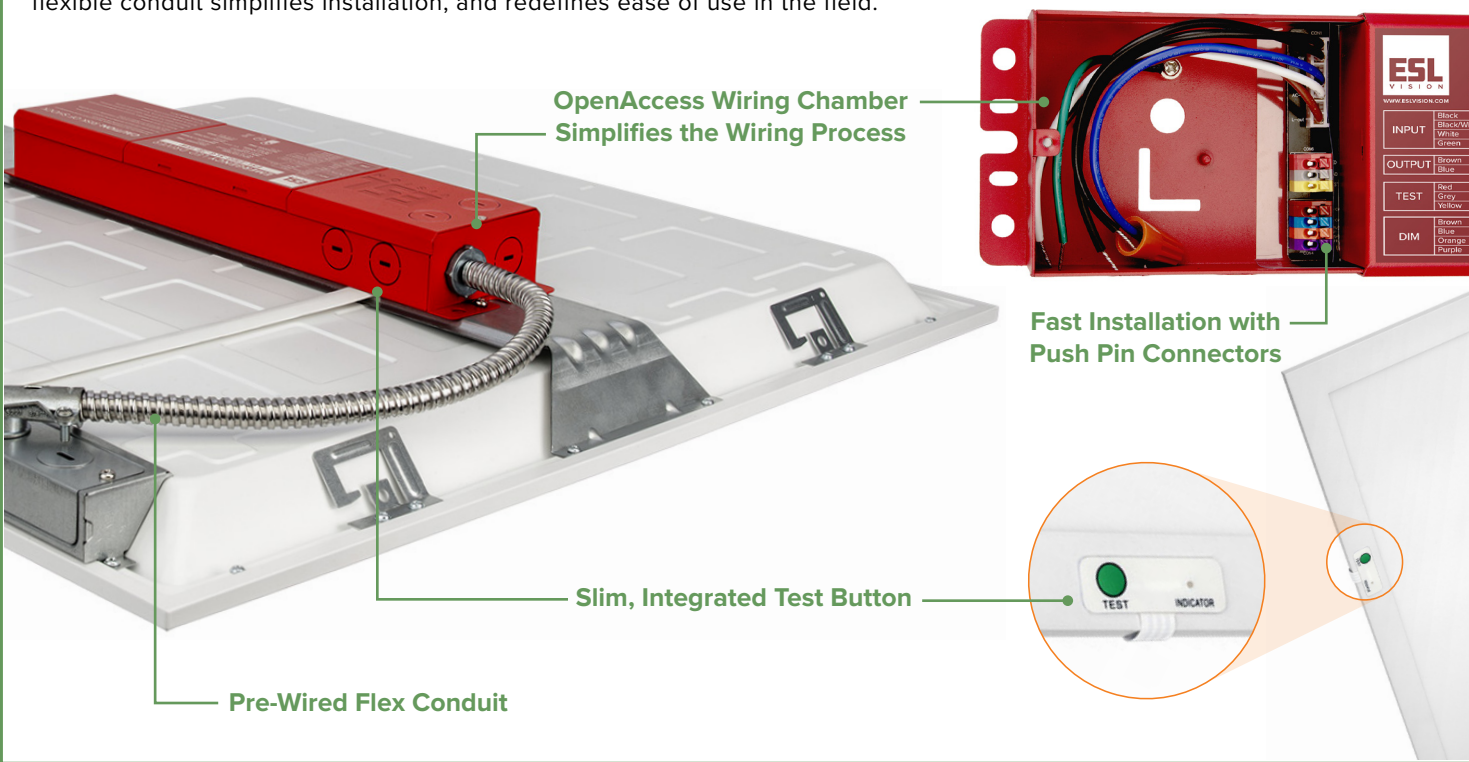


630 INTELLISENSE™ SINGLE BASKET TROFFER

NEW!

INTELLISENSE™

ESL Vision's new IntelliSense™ series of fixtures feature a built-in receptacle for simple plug-n-play controls. Add simple occupancy and daylight harvesting features with our SoloSense™ remote operated controls, or network controls with our app operated MultiSense™ Bluetooth controls.

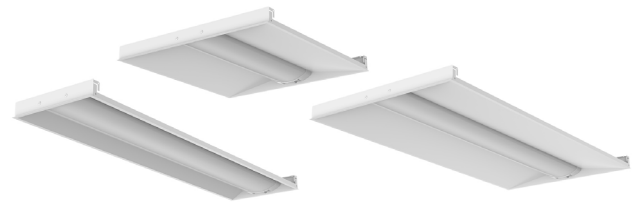

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY	
ESL-ISS-630-14-1835W-3550K	18W—26W—35W	3500K—4000K—5000K	3,750	125	120–277 VAC	60	
ESL-ISS-630-22-1835W-3550K	18W—26W—35W	3500K—4000K—5000K	3,750	125	120–277 VAC	66	
ESL-ISS-630-24-2644W-3550K	26W—35W—44W	3500K—4000K—5000K	5,000	125	120–277 VAC	32	

FACTORY INSTALLED OPTIONS

EM5	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install (SL3)
EM9	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)

FIELD INSTALLED ACCESSORIES

ESL-ACCS-14-SMK-03	Troffer surface mount kit for 1x4
ESL-ACCS-22-SMK-03	Troffer surface mount kit for 2x2
ESL-ACCS-24-SMK-03	Troffer surface mount kit for 2x4
ESL-ACCS-14-FLK-01	Troffer flange kit for 1x4
ESL-ACCS-22-FLK-01	Troffer flange kit for 2x2
ESL-ACCS-24-FLK-01	Troffer flange kit for 2x4
ESL-ACCS-14-LENS-01	Replacement lens for troffer 1x4
ESL-ACCS-22-LENS-01	Replacement lens for troffer 2x2
ESL-ACCS-24-LENS-01	Replacement lens for troffer 2x4

INTELLISENSE™ ACCESSORIES

ESL-ISS-SSEN-01	SoloSense™ plug and play 4 wire stand alone PIR + daylight harvesting sensor for 600 series
ESL-ISS-REM-01	SoloSense™ remote
ESL-ISS-MSEN-01	MultiSense™ plug and play 4 wire network PIR + daylight harvesting sensor 600 series
ESL-ISS-PP-01	MultiSense™ network zone controller AC 120–277 VAC 20A
ESL-ISS-WS-B3B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-WS-A3B-01	MultiSense™ network wall switch AC powered 3 buttons
ESL-ISS-WS-B8B-01	MultiSense™ network wall switch battery powered 3 buttons
ESL-ISS-EMG-LC-01	MultiSense™ network AC emergency lighting controller 120–277 VAC UL924
ESL-ISS-MSEN-06	IntelliSense™ MultiSense™ with PIR Occupancy and Daylight Harvesting, indoor use as ceiling sensor, IP20
ESL-ISS-GTW-01	MultiSense™ network ceiling sensor real time clock & energy monitoring dongle

LED READY FIXTURES

LED-ready T8 strip fixtures are an excellent option for large, commercial spaces looking to upgrade their facility to high-efficiency LED strips. ESL Vision offers these fixtures with or without T8 LED tubes.



F304



F314



F414



WBS4



NBS4

Fixture housings only. LEDs are sold separately.

ITEM #	DESCRIPTION
ESL-F304-BL-TB	304 Fixture, 2.1" x 48" x 3.1", stairwell/ decorative strip, 1 lamp LED T8 ready (LEDs sold separately)
ESL-F314-BL-TB	314 Fixture, 4.8" x 48" x 4.33", stairwell/ decorative strip, 2 lamp LED T8 ready (LEDs sold separately)
ESL-F414-BL-TB	414 Fixture, 8.25" x 48" x 2.75", wrap-around, 2 lamp, LED T8 ready (LEDs sold separately)
ESL-WBS4-BL-TB	Wide Body Strip 4', 4.25" x 48" x 2", strip fixture, 2 lamp LED T8 ready (LEDs sold separately)
ESL-NBS4-BL-TB	Narrow Body Strip 4', 2.92" x 48" x 1.78", strip fixture, 1 lamp LED T8 ready (LEDs sold separately)



INTELLISENSE™ LINEAR HIGH BAY

Introducing our most advanced Linear High Bay series—designed for peak performance in any industrial setting. These high bays offer the most versatile range of kelvin and wattage selectability, delivering up to 61,000 lumens in our smallest form factor yet.



Slimmest Yet — only 1.77" Tall!



Next Level Lighting Control



SOLOSENSE™

MULTISENSE™

Simple stand-alone occupancy control of a single fixture, programmable with a remote.

Bluetooth enabled Network lighting control. Group fixtures, create scenes and set schedules, all programmable with our app.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY	
ESL-LHB-75130W-44050	75W—105W—130W	4000K—4500K—5000K	20,432	173	120–277 VAC	180	
ESL-LHB-130170W-44050	130W—155W—170W	4000K—4500K—5000K	26,653	174	120–277 VAC	80	
ESL-LHB-170255W-44050	170W—210W—255W	4000K—4500K—5000K	39,263	176	120–277 VAC	60	
ESL-LHB-255400W-44050	255W—310W—400W	4000K—4500K—5000K	61,842	171	120–277 VAC	60	

FACTORY INSTALLED OPTIONS

EM15	ONLY FOR USE WITH 75130W OR 130170W. Emergency backup battery unit, auto test function, 15-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, enclosed box, UL listed for factory or field install, Lithium battery.
EM30	ONLY FOR USE WITH 170255W OR 255400W. Emergency backup battery unit, auto test function, 30-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, enclosed box, UL listed for factory or field install, Lithium battery.

FIELD INSTALLED ACCESSORIES

ESL-ISS-MSEN-03	Bluetooth enabled PIR occupancy–daylight sensor for LHB4
ESL-ISS-SSEN-03	Stand alone PIR occupancy–daylight sensor for LHB4
ESL-EMG-SL6-JB-15W	Emergency backup battery unit for ESL-LHB-75130W-44050 and ESL-LHB-130170W-44050
ESL-EMG-SL6-JB-30W	Emergency backup battery unit for ESL-LHB-170255W-44050 and ESL-LHB-255400W-44050
ESL-LHB4-1-WG	Wireguard for ESL-LHB-75130W-44050
ESL-LHB4-2-WG	Wireguard for ESL-LHB-130170W-44050
ESL-LHB4-3-WG	Wireguard for ESL-LHB-170255W-44050
ESL-LHB4-4-WG	Wireguard for ESL-LHB-255400W-44050
ESL-LHB4-PM-01	Pendant mount for LHB4
ESL-LHB4-SM-01	Surface mount for LHB4
ESL-LHB4-1-LENS	Replacement lens for ESL-LHB-75130W-44050
ESL-LHB4-2-LENS	Replacement lens for ESL-LHB-130170W-44050
ESL-LHB4-3-LENS	Replacement lens for ESL-LHB-170255W-44050
ESL-LHB4-4-LENS	Replacement lens for ESL-LHB-255400W-44050
ESL-ACCS-AC-10FT-S2-02	10-foot air craft cable mount for LHB4
ESL-ISS-REM-01	Hand-held remote for SoloSense™ controls



ROUND HIGH BAY

ROSWELL
VOL. 2 SERIES

This RHB is suitable for wet conditions and can be easily upgraded for wireless network controlling which makes it the perfect choice for any large area.



Available in White, Bronze or Black Finishes



ITEM#	SELECTABLE WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-RHB-100200W-240-ff-bbD	100W—120W—150W—200W	4000K	28,578	146	120–277 VAC	63
ESL-RHB-100200W-240-HV-ff-bbD		4000K	28,578	146	277–480 VAC	63
ESL-RHB-100200W-250-ff-bbD		5000K	29,585	149	120–277 VAC	63
ESL-RHB-100200W-250-HV-ff-bbD		5000K	29,585	149	277–480 VAC	63

Finishes: ff = (BK) Black, (WH) White, (BZ) Bronze Lens: bb = (120D) 120 Degrees – Default, (60D) 60 Degrees

FACTORY INSTALLED OPTIONS

CS3W6P	Cord set, 3 conductor, 18 gauge, white, 6-foot length, straight blade plug
CS3B6P	Cord set, 3 conductor, 18 gauge, black, 6-foot length, straight blade plug
CS3B6TL5	Cord set, 3 conductor, 18 gauge, black, 6-foot length, twist lock, NEMA I5–15 (120 VAC)
CS3B6TL6	Cord set, 3 conductor, 18 gauge, black, 6-foot length, twist lock, NEMA I6–15 (240 VAC)
CS3B6TL7	Cord set, 3 conductor, 18 gauge, black, 6-foot length, twist lock, NEMA I7–15 (277 VAC)
EM30	Emergency backup battery unit, auto test function, 30-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed cylinder wet-rated, UL listed for factory or field install, Title 20

FIELD INSTALLED ACCESSORIES

ESL-9OCC-LV-HDD	High bay occupancy sensor for twist connect, 12V input, daylight harvesting, 40ft mount, microwave, step dimming
ESL-6OCC	High bay occupancy sensor for twist connect receptacles, 12–24 VDC, daylight harvesting, 40 ft mounting, PIR sensor
ESL-ACCS-CMA2	Conduit mount adapter for Roswell Series. 3/4" NPT. Side hole allows for wiring in conduit
ESL-RHB1-ff-YM	Yoke mount for Roswell Series: (BK) black finish, (WH) white finish, (BZ) bronze finish
ESL-RHB1-WG-BKBZ	Wire guard cover for Roswell Series. Black finish. Field installed.
ESL-RHB1-WG-WH	Wire guard cover for Roswell Series. White finish. Field installed.
ESL-RHB1-ARF-90	Aluminum reflector for Roswell Series. 90 degree beam angle. Field installed.
ESL-RHB1-LOOP	Stainless steel eye bolt mount
ESL-RHB1-6SCBL	6' safety cable
ESL-EMG-REM1	Hand-held remote to programmer for EM30
ESL-REM-100	Hand-held remote for 9OCC, 6OCC

ECONOMY ROUND HIGH BAY

ESL Vision introduces the new Economy Round High Bay. Available in two finishes and three wattage sizes, each features a removable shorting cap for ESL Vision's signature Twist Lock sensors.



White



Black



ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-ERHB-90W-150-ff-90D	90W	5000K	15,783	162	120–277 VAC	90
ESL-ERHB-135W-150-ff-90D	135W	5000K	22,080	162	120–277 VAC	90
ESL-ERHB-180W-150-ff-90D	180W	5000K	29,959	162	120–277 VAC	72

Finishes: ff = (BK) Black, (WH) White

FACTORY INSTALLED OPTIONS

CS3W6P	Cord set, 3 conductor, 18 gauge, white, 6-foot length, straight blade plug
CS3B6P	Cord set, 3 conductor, 18 gauge, black, 6-foot length, straight blade plug
CS3B6TL5	Cord set, 3 conductor, 18 gauge, black, 6-foot length, twist lock, NEMA I5–15 (120 VAC)
CS3B6TL6	Cord set, 3 conductor, 18 gauge, black, 6-foot length, twist lock, NEMA I6–15 (240 VAC)
CS3B6TL7	Cord set, 3 conductor, 18 gauge, black, 6-foot length, twist lock, NEMA I7–15 (277 VAC)
EM30	Emergency backup battery unit, auto test function, 30-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed cylinder wet-rated, UL listed for factory or field install, Title 20

FIELD INSTALLED ACCESSORIES

ESL-9OCC-LV-HDD	High bay occupancy sensor for twist connect, 12V input, daylight harvesting, 40ft mount, microwave, step dimming
ESL-6OCC	High bay occupancy sensor for twist connect receptacles, 12–24VDC, daylight harvesting, 40 ft mounting, PIR sensor
ESL-ACCS-CMA2	Conduit mount adapter for ERHB Series. 3/4" NPT. Side hole allows for wiring in conduit
ESL-RHB1-LOOP	Stainless steel eye bolt mount
ESL-ERHB1-ff-TM	Trunnion mount for ERHB Series: (BK) black finish, (WH) white finish, (BZ) bronze finish
ESL-ERHB1-WG-BKBZ	Wire guard cover for ERHB Series. Black finish. Field installed.
ESL-ERHB1-WG-WH	Wire guard cover for ERHB Series. White finish. Field installed.
ESL-ERHB1-ARF-S	Aluminum reflector for ERHB Series. 90W and 135W. Field installed.
ESL-ERHB1-ARF-L	Aluminum reflector for ERHB Series. 180W. Field installed.
ESL-ERHB1-PCRF-S	PC reflector for ERHB Series 90W and 135W
ESL-ERHB1-PCRF-L	PC reflector for ERHB Series 180W
ESL-EMG-REM1	Hand-held remote to program EM30
ESL-REM-100	Hand-held remote for 9OCC, 6OCC

*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2024 ESL Vision, LLC. All rights reserved. Rev: 08/14/2024



888.493.5559



info@eslvision.com



www.eslvision.com

Outdoor Fixtures




ESL
VISION

OUTDOOR FIXTURES

VERSA AREA LIGHT

Upgrade your outdoor space with Versa—the ultimate Area Light. Kelvin and wattage selectable for complete control over light output and color temperature. The high impact polycarbonate optics and a rugged, anodized aluminum housing ensure durability in any weather condition. Designed from the ground up for flexibility and ease of use, Versa allows for single person installation, making it the most convenient and versatile choice for your lighting needs.

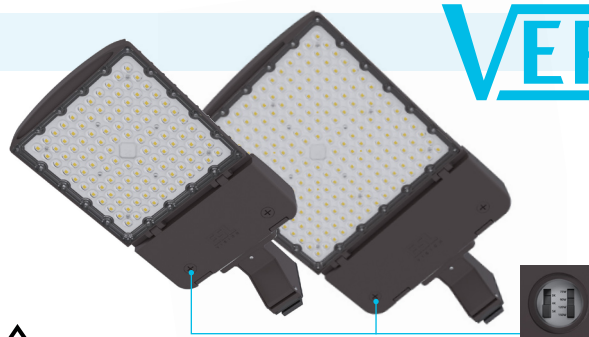

VERSA

Wattage & Kelvin
Selectable



Energy rebates based on the highest wattage of a fixture can be maximized with our **Factory Fixed** options.

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-AL-75150W-13050-ffNM-bb						45
ESL-AL-75150W-13050-BZAM-bb						45
ESL-AL-75150W-13050-ffSF-bb	75W—90W—120W—150W	3000K—4000K—5000K	23,100	171	120—277 VAC	45
ESL-AL-75150W-13050-ffUDM-bb						45
ESL-AL-75150W-13050-ffYM-bb						45
ESL-AL-75150W-13050-ffFUDM-bb						45
ESL-AL-75150W-13050-HV-ffNM-bb						45
ESL-AL-75150W-13050-HV-BZAM-bb	75W—90W—120W—150W	3000K—4000K—5000K	23,100	171	200—528 VAC	45
ESL-AL-75150W-13050-HV-ffSF-bb						45
ESL-AL-75150W-13050-HV-ffUDM-bb						45
ESL-AL-75150W-13050-HV-ffYM-bb						45
ESL-AL-75150W-13050-HV-ffFUDM-bb						45
ESL-AL-200320W-13050-ffNM-bb						33
ESL-AL-200320W-13050-BZAM-bb						33
ESL-AL-200320W-13050-ffSF-bb	200W—240W—280W—320W	3000K—4000K—5000K	49,280	171	120—277 VAC	33
ESL-AL-200320W-13050-ffUDM-bb						33
ESL-AL-200320W-13050-ffYM-bb						33
ESL-AL-200320W-13050-ffFUDM-bb						33
ESL-AL-200320W-13050-HV-ffNM-bb						33
ESL-AL-200320W-13050-HV-BZAM-bb	200W—240W—280W—320W	3000K—4000K—5000K	49,280	171	200—528 VAC	33
ESL-AL-200320W-13050-HV-ffSF-bb						33
ESL-AL-200320W-13050-HV-ffUDM-bb						33
ESL-AL-200320W-13050-HV-ffYM-bb						33
ESL-AL-200320W-13050-HV-ffFUDM-bb						33

Finishes: ff=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black Mounts: mm=(NM) No Mount, (AM) All Mounts (*available for Bronze (BZ) only), (SF) Slip Fitter, (UDM) Universal Direct Mount, (YM) Yoke Mount, (FUDM) Fixed Universal Direct Mount
Lenses: bb=(T3) Type 3 is standard, (T2) Type 2, (T4) Type 4, (T5) Type 5

FACTORY INSTALLED OPTIONS

PC	On/Off photocell (120—277 VAC)
PCHV	On/Off photocell (347—538 VAC)


FIELD INSTALLED ACCESSORIES

ESL-OCCP-LV-01	Stand-alone PIR occupancy sensor, 12V—24 VDC, uses REM-100 for programming, wet rated, white finish, field installable
ESL-AL3-ffSF	Slip Fitter Mount / ff=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black
ESL-AL3-ffUDM	Universal Direct Mount; knuckle mount with flat, 4" round and 5" round adapters
ESL-AL3-ffYM	Yoke Mount / ff=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black
ESL-AL3-ffFUDM	Fixed Universal Direct Mount; non-articulating mount with flat, 4" round and 5" round adapters
ESL-BBG2001-5	Bird Spike, 2 foot sections, 5" width
ESL-AL3-HSS-S-ff	House Side Shield for 75150W
ESL-AL3-HSS-L-ff	House Side Shield for 200320W


Finishes: ff=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black

Customized Lighting Distribution with Rotatable Lens


The Versa Series gives you even more flexibility with light distribution. By rotating the lens 90° one way or the other, you can easily customize your light distribution.




(T2) TYPE 2



(T3) TYPE 3 (standard)



(T4) TYPE 4




(T5) TYPE 5




Complete Lighting Control Comes in 2 Sizes!

- Kelvin & Wattage Selectable or Factory Fixed



Easy Select
3000K—4000K—5000K
75—90—120—150W



Easy Select
3000K—4000K—5000K
200—240—280—320W


- Standard 120–277 VAC or HV 200–528 VAC
- Rotatable Optic for Uniform Lighting
- Integrated NEMA Receptacle
- Included Shorting Cap

Expertly Crafted

- Rugged Aluminum Housing
- High Impact Polycarbonate Optics
- Deep Heatsink for Optimal Heat Dissipation

Find the Perfect Finish

- Bronze, White, Grey or Black Finish IN STOCK!



No More Guesswork!

Versa can ship with the exact mount you need, or choose our All Mounts option and have everything you need in one package.



(AM) All Mounts
Universal Direct Mount
Slip Fitter Mount
Yoke Mount
Shorting Cap



(UDM)
Universal Direct Mount
Shorting Cap



(SF)
Slip Fitter
Shorting Cap



(YM)
Yoke Mount
Shorting Cap



(NM) No Mount
Shorting Cap



(FUDM)
Fixed Universal
Direct Mount
Shorting Cap

Whats in the Box?

Each mount configuration ships along with the included shorting cap.
Ordering the optional Photocell as well? *We'll put that in the box too!*

VERSA




Innovative Mounting Hardware

- Multiple Mount Options
- Designed for Single Person Installation



FLOOD LIGHT

The new Flood Light is incredibly versatile being both kelvin and wattage selectable. It also has a built-in, replaceable photocell that is easily deactivated with an on/off switch. Built tough with a rugged die cast aluminum housing, this little light packs a big punch with it's high lumen output.

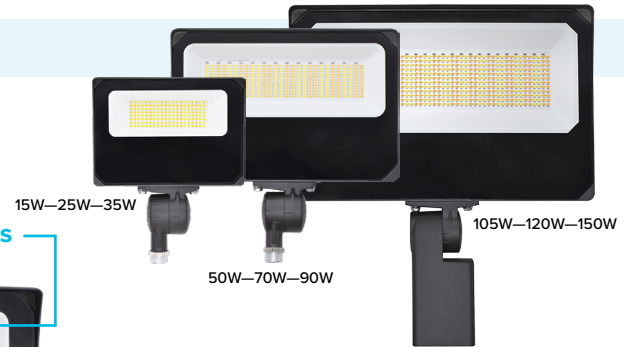

Energy rebates based on the highest wattage of a fixture can be maximized with our Factory Fixed options.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	FINISH (ff)	MOUNTING	CASE QTY
ESL-FLD-1535W-13050-ff	15W-25W-35W	3000K-4000K-5000K	4,830	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	6
ESL-FLD-5090W-13050-ff	50W-70W-90W	3000K-4000K-5000K	12,420	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	6
ESL-FLD-105150W-13050-ff	105W-120W-150W	3000K-4000K-5000K	20,400	136	(BZ) Bronze (WH) White	Slip Fitter & Yoke	6

FIELD INSTALLED OPTIONS

ESL-FL1-S-WG	Wire guard for 1535 Flood Light
ESL-FL1-M-WG	Wire guard for 5090 Flood Light
ESL-FL1-L-WG	Wire guard for 105150 Flood Light
ESL-FL1-S-VSH	Vandal shield for 1535 Flood Light
ESL-FL1-M-VSH	Vandal shield for 5090 Flood Light
ESL-FL1-L-VSH	Vandal shield for 105150 Flood Light
ESL-ACCS-PC-003	Photocell replacement for FLD Flood Light
ESL-SPD-300V-10KV	Surge protector

CANOPY

ESL Vision's LED Canopy Series offers the most versatile outdoor overhead lighting with built-in selectable wattage and kelvin. The durable wet-rated design will withstand the elements and is energy efficient with long-lasting LED technology.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CP-3060W-43050-BZ	30W-40W-60W	3000K-4000K-5000K	7,296	125	120-277 VAC	6
ESL-CP-3060W-43050-GR	30W-40W-60W	3000K-4000K-5000K	7,296	125	120-277 VAC	6

FACTORY INSTALLED OPTIONS

EM8	Emergency backup battery unit, auto test function, 18-watt output, 90-minute minimum, 100-347 VAC input, 170 VDC output, wet-rated box, UL listed for factory or field install, lithium battery (BOX1)
DHOC	Stand-alone daylight harvesting and occupancy sensor. Uses REM-100 for programming
PC	Button photocell

FIELD INSTALLED ACCESSORIES

ESL-EMG-BOX1-EXT-8W	Emergency backup battery unit, auto test function, 18-watt output, 90-minute minimum, 100-347 VAC input, 170 VDC output, wet-rated box, UL listed for factory or field install, lithium battery
ESL-REM-100	Hand-held remote for the DHOC
ESL-ACCS-PC-001	Button photocell




MINI WALL PACK

Keep your building's perimeter bright with ESL Vision's Mini Wall Pack. The built-in photocell will both increase efficiency and safety by automatically turning off the fixture during the day and back on at night. The photocell can easily be disabled for areas that need continuous lighting.

MULTI-WATT
SELECTABLE
WATTAGE

3CCT
SELECTABLE
KELVIN



Available in White or Bronze



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-MWP-0815W-13050-ff	8W—12W—15W	3000K—4000K—5000K	2,100	140	120–277 VAC	10
ESL-MWP-1530W-13050-ff	15W—20W—30W	3000K—4000K—5000K	4,200	140	120–277 VAC	10

WALL PACK

Two styles to cover any application. The Traditional Wall Pack (gen 5) can mount anywhere and can retrofit existing fixtures. The EZ Wall Pack (gen 6) has an easy French cleat mount, slim profile and is great for new construction.



EZ (gen 6)



Traditional (gen 5)

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
TRADITIONAL (GEN 5)						
ESL-WP-1545W-53050	15W—30W—40W—45W	3000K—4000K—5000	6,525	145	120–277 VAC	66
ESL-WP-30100W-53050	30W—60W—90W—100W	3000K—4000K—5000	14,120	141	120–277 VAC	66

FACTORY INSTALLED OPTIONS

EM9	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)
PC	Button photocell

FIELD INSTALLED ACCESSORIES

ESL-EMG-SL1-OTB-9W	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20
ESL-ACCS-PC-001	Button photocell



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
EZ (GEN 6)						
ESL-WP-4070W-63050-ff	40W—55W—70W	3000K—4000K—5000	9,491	137	120–277 VAC	63
ESL-WP-70100W-63050-ff	70W—85W—100W	3000K—4000K—5000	13,611	138	120–277 VAC	63

KEY: ff = BZ (Bronze), WH (White)

FACTORY INSTALLED OPTIONS

EMG	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)
11OCC	Occupancy Sensor for 6th gen WP

FULL CUTOFF WALL PACK

ESL Vision's LED Full Cut Off Wall Pack has a two-piece aluminum housing with easy driver access and features a built-in, replaceable, photocell. 10kV surge protection comes standard with optional emergency backup.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-FCWP-2555W-23050-ff	25W—40W—55W	3000K—4000K—5000	6,897	125	120–277 VAC	54
ESL-FCWP-65110W-23050-ff	65W—85W—110W	3000K—4000K—5000	13,174	125	120–277 VAC	36

ff = BZ (Bronze), WH (White)

FACTORY INSTALLED OPTIONS

EMG	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)
11OCC	Occupancy Sensor for 2nd gen FCWP

*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2024 ESL Vision, LLC. All rights reserved. Rev: 08/14/2024



888.493.5559



info@eslvision.com



www.eslvision.com

GEOMETRIC WALL PACKS

COMING
SOON

Enhance architectural exteriors with the stylish Geometric Wall Pack. Ideal for design-focused environments, it offers Kelvin & Wattage Selectable options and comes IntelliSense™ enabled. Features include our patent-pending built-in, replaceable photocell, a Quick-Mount Plate with a built-in level, and a "Visual Comfort" lens for a soft, welcoming glow.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-WPTP-2565W-13050-BZ	24W—44W—65W	3000K—4000K—5000K	8,060	124	120—277 VAC	32
ESL-WPTP-2565W-13050-WH	24W—44W—65W	3000K—4000K—5000K	8,060	124	120—277 VAC	32

FACTORY INSTALLED OPTIONS

EM9 Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120—277 VAC input, 10—300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)


FIELD INSTALLED ACCESSORIES

ESL-ISS-MSEN-03 IntelliSense™ MultiSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40
ESL-ISS-SSEN-03 IntelliSense™ SoloSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40

HALF-MOON WALL PACKS

COMING
SOON

Our sleek Half Moon Wall Pack provides an alternative look for outdoor spaces where aesthetics matter. With all of the features of our Geometric Wall Pack, it's dual-lens design offers additional versatility with Up Only, Down Only, and Up & Down lighting modes.

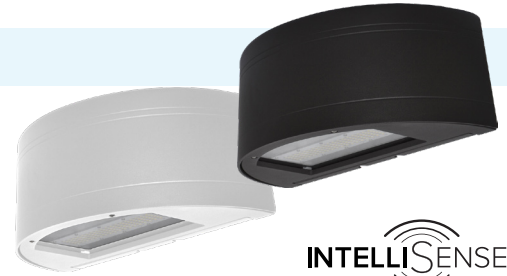

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-WPHM-2565W-13050-BZ	24W—44W—65W	3000K—4000K—5000K	8,060	124	120—277 VAC	32
ESL-WPHM-2565W-13050-WH	24W—44W—65W	3000K—4000K—5000K	8,060	124	120—277 VAC	32

FACTORY INSTALLED OPTIONS

EM9 Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120—277 VAC input, 10—300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20 (SL1-OTB)

FIELD INSTALLED ACCESSORIES

ESL-ISS-MSEN-03 IntelliSense™ MultiSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40
ESL-ISS-SSEN-03 IntelliSense™ SoloSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40

POST TOP

COMING
SOON

Beautify any outdoor environment from the ground up with our chic Post Top Lights. Suitable for various locations, these versatile fixtures feature Kelvin and Wattage Selectability, a PIR Occupancy Sensor and a robust UV Polycarbonate Optic Lens. Featuring our patent-pending built-in replaceable photocells, these lights lend elegance to their surroundings with cutting-edge technology.



ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-PT-4580W-13050-BZ	45W—60W—80W	3000K—4000K—5000K	11,400	130	120—277 VAC	8
ESL-PT-100160W-13050-BZ	100W—125W—160W	3000K—4000K—5000K	19,800	124	120—277 VAC	8



CYLINDER WALL MOUNT

COMING
SOON

Refine entryways, facades, and more with our elegant Wall Cylinders, designed to enhance any exterior. Features include kelvin & wattage selectability, our patent-pending built-in replaceable photocell, and customizable bi-directional light settings. Available in four contemporary finishes, our Wall Cylinders combine form and function adding a touch of sophistication to your outdoor lighting design.



Matte Silver



Bronze



White



Black




ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	CASE QTY
ESL-CYL-R3-15W-13050-MSWM	15W	3000K–4000K–5000K	1,700	113	120–277 VAC	12
ESL-CYL-R3-15W-13050-WHWM	15W	3000K–4000K–5000K	1,700	113	120–277 VAC	12
ESL-CYL-R3-15W-13050-BKWM	15W	3000K–4000K–5000K	1,700	113	120–277 VAC	12
ESL-CYL-R3-15W-13050-BZWM	15W	3000K–4000K–5000K	1,700	113	120–277 VAC	12
ESL-CYL-R4-20W-13050-MSWM	20W	3000K–4000K–5000K	2,640	132	120–277 VAC	6
ESL-CYL-R4-20W-13050-WHWM	20W	3000K–4000K–5000K	2,640	132	120–277 VAC	6
ESL-CYL-R4-20W-13050-BKWM	20W	3000K–4000K–5000K	2,640	132	120–277 VAC	6
ESL-CYL-R4-20W-13050-BZWM	20W	3000K–4000K–5000K	2,640	132	120–277 VAC	6
ESL-CYL-R6-35W-13050-MSWM	35W	3000K–4000K–5000K	5,075	145	120–277 VAC	6
ESL-CYL-R6-35W-13050-WHWM	35W	3000K–4000K–5000K	5,075	145	120–277 VAC	6
ESL-CYL-R6-35W-13050-BKWM	35W	3000K–4000K–5000K	5,075	145	120–277 VAC	6
ESL-CYL-R6-35W-13050-BZWM	35W	3000K–4000K–5000K	5,075	145	120–277 VAC	6

DUSK TO DAWN BARN LIGHT

COMING
SOON

Introducing the Dusk 2 Dawn from ESL Vision: the ultimate choice for versatile outdoor lighting. Its multi-mount design allows for easy wall or pole mounting, ensuring flexibility for any application. With superior light distribution and robust weather protection, it's the perfect blend of efficiency and reliability. Choose the Dusk 2 Dawn for cost-effective, dependable outdoor lighting solutions.

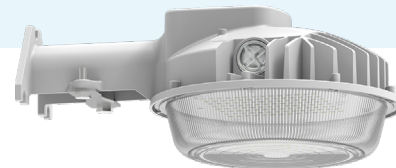

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY
ESL-D2D-1030W-13050	10W–20W–30W	3000K–4000K–5000K	4,500	148	120–277 VAC	6
ESL-D2D-4080W-13050	40W–60W–80W	3000K–4000K–5000K	11,000	148	120–277 VAC	6




CLASS 1 DIVISION 1 HAZARDOUS SERIES

Designed to work in actively explosive environments, the Class 1 Division 1 Hazardous Series of fixtures are ready to handle hazardous conditions and concentrations of flammable combustible vapors, liquids and gases. These fixtures are resistant to shock and vibration, IK10 impact rate, ABS Certified and come standard with 10kV surge protection.



FLOOD



ROUND HIGH BAY



LINEAR HIGH BAY



JELLY JAR



EXIT

ITEM#	WATTAGE	KELVIN (xx)	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY			
FLOOD									
ESL-HZFL-S20W-1xx	20W	(30) 3000K (40) 4000K (50) 5000K	2,800	140	(BLANK) MV 100–277 VAC (HV) 200–480 VAC	42			
ESL-HZFL-S40W-1xx ESL-HZFL-S40W-1xx-HV	40W		5,600	140		42			
ESL-HZFL-S60W-1xx ESL-HZFL-S60W-1xx-HV	60W		8,400	140		42			
ESL-HZFL-S80W-1xx ESL-HZFL-S80W-1xx-HV	80W		11,200	140		42			
ESL-HZFL-L100W-1xx† ESL-HZFL-L100W-1xx-HV†	100W		14,000	140		33			
ESL-HZFL-L120W-1xx† ESL-HZFL-L120W-1xx-HV†	120W		16,800	140		33			
ESL-HZFL-L150W-1xx† ESL-HZFL-L150W-1xx-HV†	150W		21,000	140		33			
ESL-HZFL-L200W-1xx† ESL-HZFL-L200W-1xx-HV†	200W		28,000	140		33			
ROUND HIGH BAY									
ESL-HZRHB-S40W-1xx†	40W		(30) 3000K (40) 4000K (50) 5000K	2,800		140	(BLANK) MV 100–277 VAC (HV) 200–480 VAC	66	
ESL-HZRHB-S60W-1xx† ESL-HZRHB-S60W-1xx-HV†	60W	8,400		140	66				
ESL-HZRHB-S80W-1xx† ESL-HZRHB-S80W-1xx-HV†	80W	11,200		140	66				
ESL-HZRHB-M100W-1xx† ESL-HZRHB-M100W-1xx-HV†	100W	14,000		140	78				
ESL-HZRHB-M150W-1xx† ESL-HZRHB-M150W-1xx-HV†	150W	21,000		140	78				
ESL-HZRHB-L200W-1xx† ESL-HZRHB-L200W-1xx-HV†	200W	28,000		140	37				
ESL-HZRHB-L240W-1xx† ESL-HZRHB-L240W-1xx-HV†	240W	33,600		140	37				
ESL-HZRHB-L280W-1xx† ESL-HZRHB-L280W-1xx-HV†	280W	39,200		140	37				
LINEAR HIGH BAY									
ESL-HZLHB-S20W-1xx†	20W	(30) 3000K (40) 4000K (50) 5000K	2,800	140	(BLANK) MV 100–277 VAC (HV) 200–480 VAC	31			
ESL-HZLHB-S40W-1xx† ESL-HZLHB-S40W-1xx-HV†	40W		5,600	140		31			
ESL-HZLHB-S60W-1xx† ESL-HZLHB-S60W-1xx-HV†	60W		8,400	140		31			
ESL-HZLHB-L80W-1xx† ESL-HZLHB-L80W-1xx-HV†	80W		11,200	140		17			
ESL-HZLHB-L100W-1xx† ESL-HZLHB-L100W-1xx-HV†	100W		14,000	140		17			
ESL-HZLHB-L120W-1xx† ESL-HZLHB-L120W-1xx-HV†	120W		16,800	140		17			
JELLY JAR									
ESL-HZJJ-10W-1xx	10W	(30) 3000K (40) 4000K (50) 5000K	1,400	140	(BLANK) MV 120–277 VAC	85			
ESL-HZJJ-20W-1xx	20W		2,800	140		85			
ESL-HZJJ-30W-1xx	30W		4,200	140		85			
ESL-HZJJ-40W-1xx	40W		5,600	140		85			
ESL-HZJJ-50W-1xx	50W		7,000	140		85			
EXIT									
ESL-HZEX-3W-1cc††	3W	(RD) Red (GR) Green (YW) Yellow	1,400	140	(BLANK) MV 120–277 VAC	38			
ESL-HZEX-5W-1cc††	5W		2,800	140		38			

*Additional Voltage: (DC12) DC12–48V available upon request

†Built-in emergency is available ††Built-in emergency is standard on Exit Fixtures



CLASS 1 DIVISION 2 HAZARDOUS SERIES

Designed to work in passively explosive environments, the Class 1 Division 2 Hazardous Series of fixtures can handle hazardous conditions and concentrations of flammable combustible vapors, liquids and gases that may occur under abnormal situations. These fixtures are resistant to shock and vibration, IK10 impact rate, ABS Certified and come standard with 10kV surge protection.



FLOOD



ROUND HIGH BAY



LINEAR HIGH BAY



ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	PALLET QTY		
FLOOD								
ESL-HZFL-S20W-2xx	20W	(30) 3000K (40) 4000K (50) 5000K	2,800	140	(BLANK) MV 100–277 VAC (HV) 200–480 VAC	80		
ESL-HZFL-S40W-2xx	40W		5,600	140		80		
ESL-HZFL-S60W-2xx ESL-HZFL-S60W-2xx-HV	60W		8,400	140		80		
ESL-HZFL-M80W-2xx† ESL-HZFL-S80W-2xx-HV†	80W		11,200	140		73 80		
ESL-HZFL-M100W-2xx† ESL-HZFL-M100W-2xx-HV†	100W		14,000	140		73		
ESL-HZFL-L120W-2xx† ESL-HZFL-L120W-2xx-HV†	120W		16,800	140		36		
ESL-HZFL-L150W-2xx† ESL-HZFL-L150W-2xx-HV†	150W		21,000	140		36		
ESL-HZFL-L200W-2xx† ESL-HZFL-L200W-2xx-HV†	200W		28,000	140		36		
ESL-HZFL-XL250W-2xx† ESL-HZFL-XL250W-2xx-HV†	250W		35,000	140		41		
ESL-HZFL-XL300W-2xx† ESL-HZFL-XL300W-2xx-HV†	300W		42,000	140		41		
ESL-HZFL-XL400W-2xx† ESL-HZFL-XL400W-2xx-HV†	400W		56,000	140		41		
ROUND HIGH BAY								
ESL-HZRHB-S20W-2xx	20W		(30) 3000K (40) 4000K (50) 5000K	2,800		140	(BLANK) MV 100–277 VAC (HV) 200–480 VAC	66
ESL-HZRHB-S40W-2xx ESL-HZRHB-S40W-2xx-HV	40W			5,600		140		66
ESL-HZRHB-M60W-2xx ESL-HZRHB-M60W-2xx-HV	60W	8,400		140	78			
ESL-HZRHB-M80W-2xx ESL-HZRHB-M80W-2xx-HV	80W	11,200		140	78			
ESL-HZRHB-L100W-2xx† ESL-HZRHB-L100W-2xx-HV†	100W	14,000		140	37			
ESL-HZRHB-L120W-2xx† ESL-HZRHB-L120W-2xx-HV†	120W	16,800		140	37			
ESL-HZRHB-L150W-2xx† ESL-HZRHB-L150W-2x-HV†	150W	21,000		140	37			
ESL-HZRHB-L200W-2xx† ESL-HZRHB-L200W-2xx-HV†	200W	28,000		140	37			
ESL-HZRHB-XL250W-2xx† ESL-HZRHB-XL250W-2xx-HV†	250W	33,600		140	29			
ESL-HZRHB-XL300W-2xx† ESL-HZRHB-XL300W-2xx-HV†	300W	39,200		140	29			
ESL-HZRHB-XL400W-2xx† ESL-HZRHB-XL400W-2xx-HV†	400W	56,000		140	29			
LINEAR HIGH BAY								
ESL-HZLHB-S20W-2xx†	20W	(30) 3000K (40) 4000K (50) 5000K		2,800	140	(BLANK) MV 100–277 VAC (HV) 200–480 VAC		31
ESL-HZLHB-S40W-2xx† ESL-HZLHB-S40W-2xx-HV†	40W			5,600	140			31
ESL-HZLHB-L60W-2xx† ESL-HZLHB-L60W-2xx-HV†	60W		8,400	140	17			
ESL-HZLHB-L80W-2xx† ESL-HZLHB-L80W-2xx-HV†	80W		11,200	140	17			

*Additional Voltage: (DC12) DC12–48V available upon request
†Built-in Emergency is available



SPORT LIGHT

Introducing STADIA, the revolutionary new sports light from ESL Vision. Crafted with high-impact polycarbonate optics and a powder coated, die-cast aluminum body for extreme durability, this versatile light delivers exceptional brightness and clarity and offers a wide range of options to achieve the ideal illumination for your venue. With optional network integration for light management and versatile mounting choices, the STADIA series is destined to be your MVP for many seasons to come.




550 WATTS

STADIA



Wide Voltage 200–528VAC

for 208, 240, 277, 347,
& 480VAC Installations

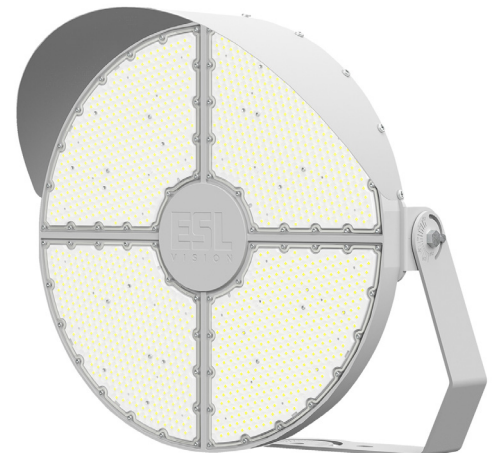

850 WATTS



ITEM#	WATTAGE	KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE (zz)	PALLET QTY
ESL-SPT-550W-250-20	550W	5000K	88,937	162	200–528 VAC	10
ESL-SPT-550W-250-30			88,811	161		10
ESL-SPT-550W-250-40			87,733	161		10
ESL-SPT-550W-250-50			88,608	161		10
ESL-SPT-850W-250-20	850W	5000K	145,117	171	200–528 VAC	10
ESL-SPT-850W-250-30			144,100	170		10
ESL-SPT-850W-250-40			143,210	168		10
ESL-SPT-850W-250-50			142,032	167		10

FACTORY INSTALLED OPTIONS



DIM10-087-06	Metal-cased 5–24V, DC powered wireless control module, 0–10V or DALI2, 2 sensor interfaces. (External antenna required, sold separately.)
KIT-ANT18-02	Outdoor antenna straight, 18" cable, 14mm bulkhead, O-ring

FIELD INSTALLED ACCESSORIES

ESL-SPT-LASER	Stadia aiming laser
CBSSW-450-002	Central Base Station — NEMA enclosure, 5-button switch, includes SS450, RoHS


Precision LIGHTING LAYOUTS

ESL Vision offers lighting layouts with illuminance calculations and aiming diagrams for pin-point precision in creating the optimal lighting for any venue. Plan, price, bid and present your projects with confidence!

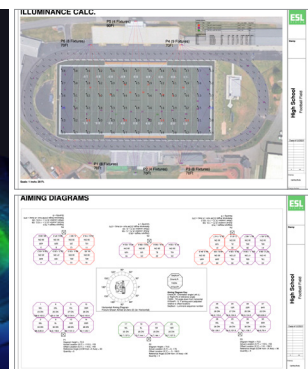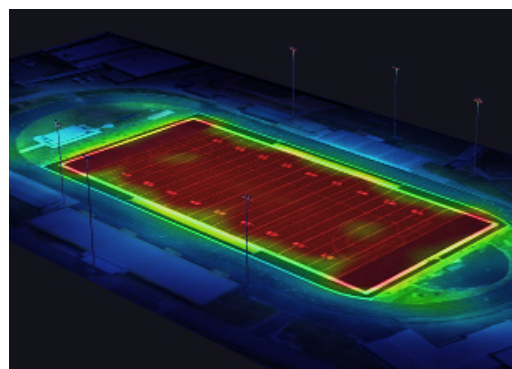


NEXT-LEVEL STADIUM LIGHTING!

Featuring dual surge protection and wide voltage adaptability, STADIA provides unparalleled reliability and flexibility in challenging environments. Its 0–10V dimming and optional network integration give you complete control over your lighting, while dynamic lighting effects create a stunning visual experience for players and fans alike.

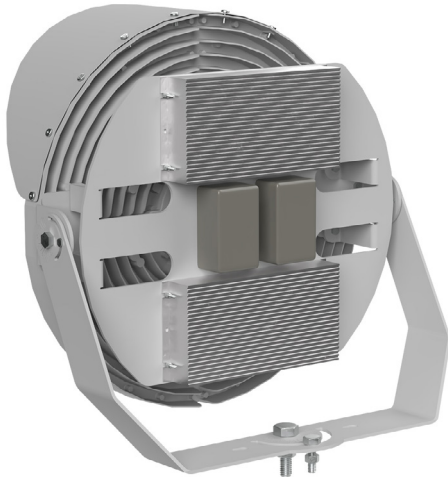

850W Dual Drivers

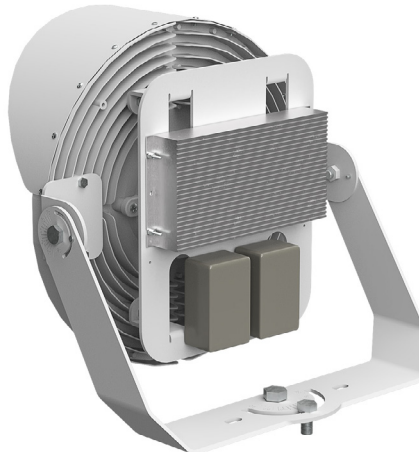

550W Single Driver

DUAL SURGE PROTECTION

- 20kV Stand-Alone, 6kV Built-In

WIDE VOLTAGE INPUT

- 200–528 VAC
 - For 208, 240, 277, 347, and 480 VAC installations

0–10V DIMMING

OPTIONAL NETWORK INTEGRATION

- Wireless Controls
- Dynamic Lighting Effects

MULTIPLE MOUNTING CONFIGURATIONS

Driver Mounts




Classic:
ESL-SPT-550W-250-bb
ESL-SPT-850W-250-bb



Back Driver Mount
with Trunnion Fixture Mount:
ESL-SPT-550W-250-bb-DMTM
ESL-SPT-850W-250-bb-DMTM



Back Driver Mount
with Slip-fitter Fixture Mount:
ESL-SPT-550W-250-bb-DMSF
ESL-SPT-850W-250-bb-DMSF

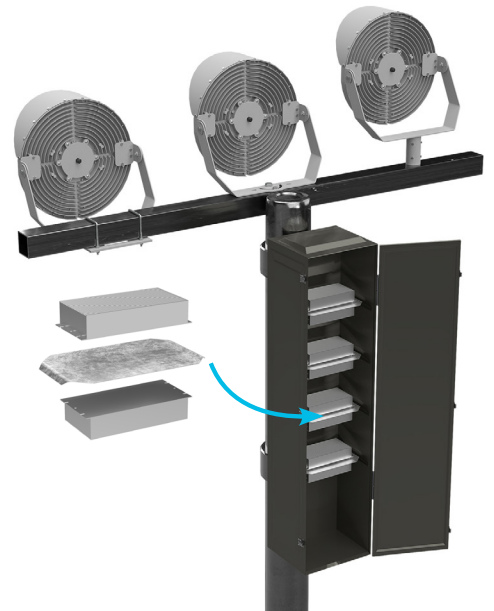

Fixture Mounts



Remote Driver Mount
with Diving Board Fixture Mount:
ESL-SPT-550W-250-bb-RMDB
ESL-SPT-850W-250-bb-RMDB



Remote Driver Mount
with Trunnion Fixture Mount:
ESL-SPT-550W-250-bb-RMTM
ESL-SPT-850W-250-bb-RMTM



Remote Driver Mount
with Slip-fitter Fixture Mount:
ESL-SPT-550W-250-bb-RMSF
ESL-SPT-850W-250-bb-RMSF

Bring More Excitement to the Big Game with

STADIA & SYNAPSE



SYNAPSE WIRELESS CONTROL SYSTEM

ESL Vision offers the Synapse Wireless Control System for our Stadia Lighting Series. This system utilizes integrated wireless controllers to connect each light to the Synapse SimplySnap Mesh Network. Here the status and programming of each light in the network can be addressed using a web browser based user interface. The user can choose to use **SimplySnap Local** or **SimplySnap Cloud LM-Base** to connect to each light in the system. The SNAP system offers enhanced back-up, management of multiple sites, outage notifications and performance reports.


- SIMPLE INSTALLATION ALLOWS FOR EASY PRE OR POST INSTALLATION
- WIRELESSLY CONTROL DYNAMIC LIGHTING SETTINGS FROM YOUR PHONE, COMPUTER OR BASE STATION
- CONTROL INDIVIDUAL FIXTURES OR GROUPS OF FIXTURES
- CREATE CUSTOM SCENES OR DYNAMIC BEHAVIORS

SimplySnap Local



- Local management of lights, zones, scenes and schedule
- No internet required
- Built-in WiFi AP or Ethernet
- Browser based app
- Push-button control (CBS)


SimplySnap Cloud LM-Base

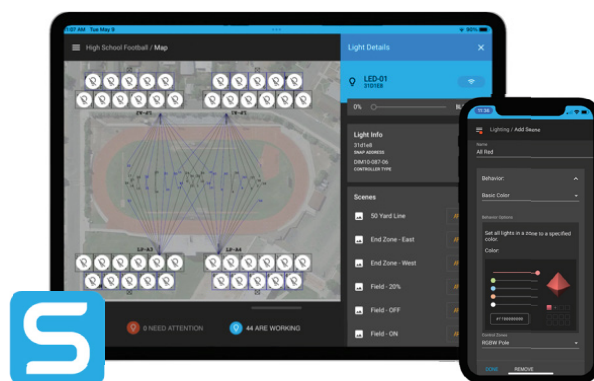

- Progressive web app
- Cloud map, scenes and schedules
- Access from anywhere
- Multi-site management
- Single UI across multiple gateways
- Energy reporting
- Cloud user account levels
- Automatic Backups

CONTACT YOUR REPRESENTATIVE TO LEARN MORE

Emergency

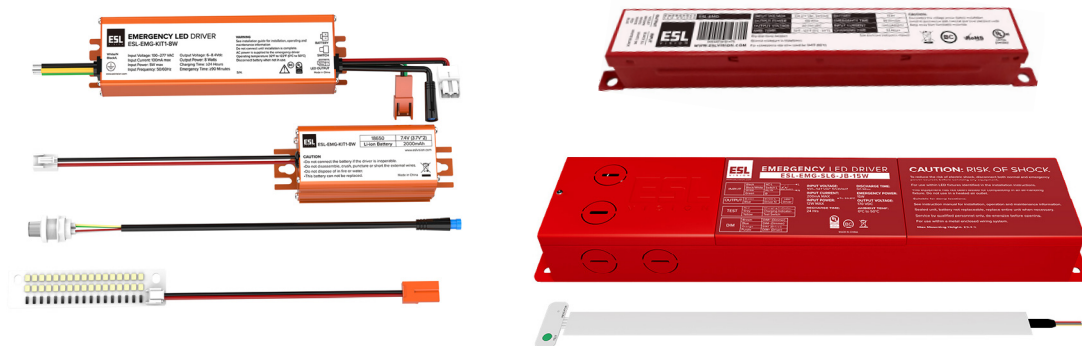

ESL
VISION

EMERGENCY

EMERGENCY DRIVERS

SL1-OTB — 9 WATT



- Field or Factory Installation — UL 924 and CSA C22.2 No.141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Slim profile design
- Compatible with AC input lamps and DC output drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- Lithium-ion battery (7–10 year life expectancy with >1000 charging cycles)
- 2-Wire illuminated test switch included

ITEM #	DESCRIPTION
ESL-EMG-SL1-OTB-9W	Emergency backup battery unit, auto test function, 9-watt output, 90-minute minimum, 120–277 VAC input, 10–300 VDC output, open terminal block wiring, UL listed for factory or field install, Title 20

SL5-CLW, SL3-CLW — 5 WATT



- Field or Factory Installation — UL 924 and CSA C22.2 No.141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- Lithium-ion battery (5 year limited warranty with 300 charging and discharging cycles)
- 2-Wire illuminated test switch included

ITEM #	DESCRIPTION
ESL-EMG-SL5-CLW-5W	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install
ESL-EMG-SL3-CLW-5W	Emergency backup battery unit, auto test function, 5-watt output, 90-minute minimum, 120–277 VAC input, 20–250 VDC output, closed-lead wiring, UL listed for factory or field install

SL6-CSC — 8 WATT, 18 WATT



- Field or Factory Installation — UL 924 and CSA C22.2 No.141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Slim profile design
- Compatible with AC input lamps and DC output drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- An illuminated test switch/charging indicator light is provided

ITEM #	DESCRIPTION
ESL-EMG-SL6-CSC-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.
ESL-EMG-SL6-CSC-18W	Emergency backup battery unit, auto test function, 18-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.

SL6-JB — 15 WATT, 30 WATT



- Field or Factory Installation—UL 924 and CSA C22.2 No. 141 emergency lighting compliant
- Meets CEC Title 20 (California Energy Commission) requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- Compatible with AC input lamps and DC output drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation
- Large wiring cavity simplifies the wiring process for contractors, saving time and effort during setup

ITEM #	DESCRIPTION
ESL-EMG-SL6-JB-15W	Emergency backup battery unit, auto test function, 15-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, enclosed box, UL listed for factory or field install, Lithium battery.
ESL-EMG-SL6-JB-30W	Emergency backup battery unit, auto test function, 30-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, enclosed box, UL listed for factory or field install, Lithium battery.

EMERGENCY DRIVERS

BOX1 — 8 WATT



- Field or Factory Installation – UL 924 and CSA C22.2 No 141 emergency lighting compliant
- Meets CEC Title 20 requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- High voltage input
- Constant power output provides 90 minutes of consistent egress lighting with no degradation
- Suitable for wet locations

ITEM #	DESCRIPTION
ESL-EMG-BOX1-EXT-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, wet-rated box, UL listed for factory or field install, lithium battery

HB2-CWR — 25 WATT



- Field or Factory Installation – UL 924 and CSA C22.2 No 141 emergency lighting compliant
- Meets CEC Title 20 requirements
- Monthly and yearly auto test function for reduced maintenance
- Meets or exceeds all NEC emergency lighting standards
- IP65 wet location listed
- For use with Round High Bay fixture with integrated 0–10V drivers
- Constant power output provides 90-minutes of consistent egress lighting with no degradation

ITEM #	DESCRIPTION
ESL-EMG-HB2-CWR-25W	Emergency backup battery unit, auto test function, 25-watt output, 90-minutes minimum, 100–347 VAC input, 170 VDC output, wet rated box, UL listed for factory or field install, Lithium battery.

EMERGENCY HOTSPOT

Turn nearly any fixture into an LED Emergency with ESL Vision's Emergency Hotspot. Producing an amazing 8 Watt and 1,200-Lumen output, this Hotspot provides generous light to a wide range of fixtures.

- Provides 90 Minutes Emergency Light
- Low Power Consumption
- Illuminated Test Switch
- Switches to Emergency Mode when Power Fails
- ROHS and FCC Part 15 Compliant

LED DRIVER

- Small Form Factor Size
- Low Power Consumption
- ROHS & FCC Part 15 Compliant

Li ION BATTERY

- Provides 90 minutes of Emergency Service
- Only 24 Hours for a Full Charge
- Activates in a Power Failure

TEST BUTTON

- Illuminated Test Button
- Easy Access for Monthly Testing

LED LIGHT STRIP

- Will Fit Nearly Any Luminaire
- 1,200 Lumens
- Simple Installation



ITEM #	DESCRIPTION
ESL-EMG-KIT1-8W	Emergency backup battery kit unit, 8-watt output, 90-minute minimum, 100–277 VAC input, high efficacy LED module with 1,200lm output power

EMERGENCY COMPATIBILITY

SERIES/FIXTURE	FIELD INSTALLATION	FACTORY INSTALLATION	
		PRIMARY	SECONDARY
T8 Lamps Type B and AB	ESL-EMG-SL5-CLW-5W	N/A	N/A
ID Series (all T8 Tubes)	ESL-EMG-KIT1-8W	ESL-EMG-KIT1-8W	
Optus (2nd Gen)	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL6-CSC-8W	
601 Strip	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
800 Strip	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
801 Strip	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
810 Wrap	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
822 Panels	ESL-EMG-SL6-JB-15W	ESL-EMG-SL6-JB-15W	ESL-EMG-SL6-CSC-8W
630 Troffer	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
830 Troffer	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
640 Troffer Retrofit	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
840 Troffer Retrofit	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
860 Strip Retrofit	ESL-EMG-SL6-CSC-8W	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
Vapor Tights (4-ft and 8-ft Only)	ESL-EMG-SL1-OTB-9	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL3-CLW-5W
LHB—Linear High Bays (4th Gen) (75130W and 130170W Only)	ESL-EMG-SL6-JB-15W	ESL-EMG-SL6-JB-15W	
LHB—Linear High Bays (4th Gen) (170255W and 255400W Only)	ESL-EMG-SL6-JB-30W	ESL-EMG-SL6-JB-30W	
RHB—Round High Bay	ESL-EMG-HB1-CWR-25W	ESL-EMG-HB1-CWR-25W	
ERHB—Economy Round High Bay	ESL-EMG-HB1-CWR-25W	ESL-EMG-HB1-CWR-25W	
Wall Packs (5th and 6th Gen)	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL1-OTB-9W	
Full Cut Off Wall Packs (2nd Gen)	ESL-EMG-SL1-OTB-9W	ESL-EMG-SL1-OTB-9W	
Canopy	ESL-EMG-BOX1-EXT-8W	ESL-EMG-BOX1-EXT-8W	

Drivers & Controls




STAND-ALONE CONTROLS



ITEM #	DESCRIPTION
ESL-20CC-HDO	Microwave occupancy sensor, 8' to 46' mounting
ESL-40CC-LDD	Microwave occupancy sensor, on/off control, 50% step dimming for 30/60W, 8' to 20' mounting
ESL-60CC	PIR high bay occupancy sensor for twist connect receptacles, 12–24 VDC, daylight harvesting, 40ft mounting
ESL-80CC-ODD-LV	PIR occupancy and photocell sensor, 0–10V dimming, 8' to 50' mounting
ESL-90CC-LV-HDD	Microwave high bay occupancy sensor for twist connect receptacles, 12V input, daylight harvesting, 40ft mounting, step dimming
ESL-110CC-LV-ff	Microwave occupancy sensor for 6th gen Wall Pack and 2nd gen FCWP / ff= (blank) White, (BR) Brown
ESL-OCCP-LV-01	Stand-alone PIR occupancy sensor, 12V–24 VDC, uses REM-100 for programming, wet rated, white finish, field installable
ESL-1DHOC-LV	Stand-alone microwave daylight harvesting and occupancy sensor
ESL-2DHOC-LV	Stand-alone microwave daylight harvesting and occupancy sensor. Program with dip switch or REM-100
ESL-3DHOC-LV	PIR occupancy and photocell sensor for CL 5
ESL-5DHOC-LV	Bi-Level microwave daylight harvesting and occupancy sensor, 12–24 VDC
ESL-PCOF	On/Off photocell (120–277 VAC)
ESL-PCOFHV	On/Off photocell (432–538 VAC)
ESL-RPC7	7-pin twist lock receptacle
ESL-PCSC	Shorting cap for photocell
ESL-ACCS-PC-001	Button photocell
ESL-REM-100	Hand-held remote

Introducing IntelliSense™ Controls

Our new line of controls offers a comprehensive solution for your lighting needs. Whether you need stand-alone or networked lighting control, these versatile and reliable options have you covered from Simple to Smart!

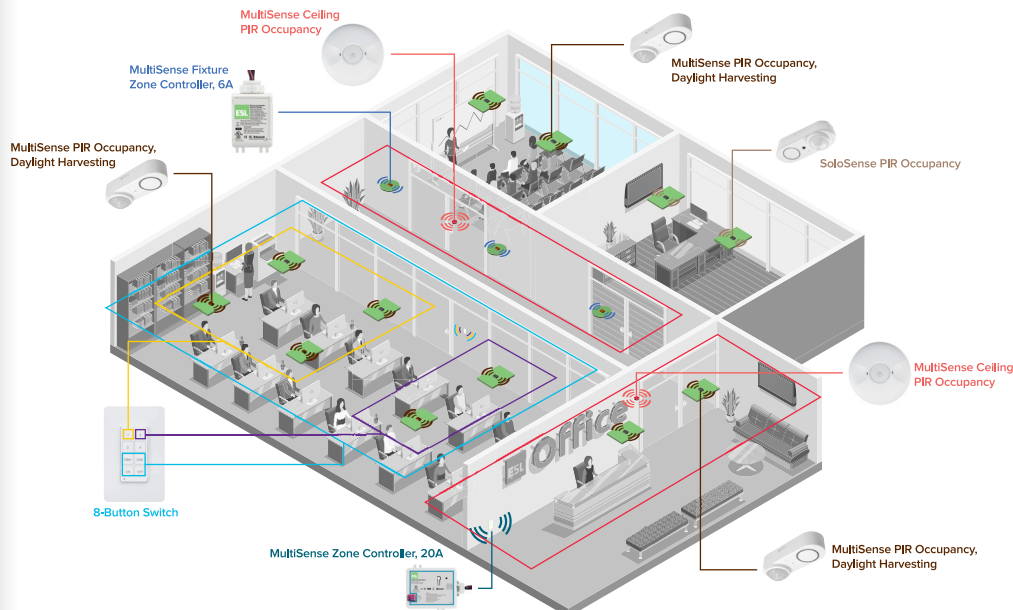

INTELLISENSE™ CONTROLS



This comprehensive family of controls integrates seamlessly with the new 600 Series of IntelliSense™ Quick-Connect fixtures. It offers both stand-alone and networked solutions, with compatibility expanding to support additional products in our line.



Bluetooth enabled network lighting control. Group fixtures, create scenes and set schedules, all programmable with our app.



ESL-ISS-MSEN-01 ESL-ISS-MSEN-03 ESL-ISS-MSEN-04 ESL-ISS-MSEN-06



ESL-ISS-MSEN-07 ESL-ISS-WS-A3B-01 ESL-ISS-WS-B3B-01 ESL-ISS-WS-B8B-01 ESL-ISS-PP-02 ESL-ISS-PP-01 ESL-ISS-EMG-LC-01 ESL-ISS-GTW-01

ITEM #	DESCRIPTION
ESL-ISS-MSEN-01	IntelliSense™ MultiSense™ sensor with PIR Occupancy and Daylight Harvesting, IP20
ESL-ISS-MSEN-03	IntelliSense™ MultiSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40
ESL-ACCS-ISS-LENS-01	IntelliSense™ lens for high bay sensors, 20 to 40 ft mounting heights, IP40
ESL-ACCS-ISS-LENS-02	IntelliSense™ lens for high bay sensors, 20 to 40 ft mounting heights, IP66
ESL-ISS-MSEN-04	IntelliSense™ MultiSense™ sensor with PIR Occupancy, outdoor, Zhaga installation, IP66
ESL-ISS-MSEN-06	IntelliSense™ MultiSense™ with PIR Occupancy and Daylight Harvesting, indoor use as ceiling sensor, IP20
ESL-ACCS-ISS-CM-01	IntelliSense™ mount accessories, works with ESL-ISS-MSEN-06
ESL-ISS-MSEN-07	IntelliSense™ MultiSense™ with PIR Occupancy and Daylight Harvesting for high bays, 120–277 VAC, IP40
ESL-ISS-WS-A3B-01	IntelliSense™ AC 120–277 VAC wall switch, 3-button, ON/OFF, DIM+, DIM-
ESL-ISS-WS-B3B-01	IntelliSense™ battery powered wireless wall switch, 3-button, ON/OFF, DIM+, DIM-, uses (1) CR2032 battery
ESL-ISS-WS-PLATE-01	IntelliSense™ wireless wall switch plate for 3-button wall switch
ESL-ISS-WS-B8B-01	IntelliSense™ battery powered wireless wall switch, 8-button, 4-scenes, DIM+, DIM-, ON/AUTO/OFF, uses (2) AAA batteries
ESL-ISS-WS-PLATE-02	IntelliSense™ wireless wall switch plate for 8-button wall switch
ESL-ISS-PP-02	IntelliSense™ Power Pack AC 120–277 VAC, 6A
ESL-ISS-PP-01	IntelliSense™ Zone Controller AC 120–277 VAC, 20A, 0–10V dimming push-in port
ESL-ISS-EMG-LC-01	IntelliSense™ Emergency lighting controller, UL924
ESL-ISS-GTW-01	IntelliSense™ Gateway, Energy Monitoring Time Keeper



Simple stand-alone PIR occupancy control for a single fixture, easily programmed with our remote.



ESL-ISS-SSEN-01 ESL-ISS-SSEN-03 ESL-ISS-REM-01


ITEM #	DESCRIPTION
ESL-ISS-SSEN-01	IntelliSense™ SoloSense™ sensor with PIR Occupancy and Daylight Harvesting, IP20
ESL-ISS-SSEN-03	IntelliSense™ SoloSense™ sensor with PIR Occupancy and Daylight Harvesting for high bay, 3.5MM audio jack, IP40
ESL-ISS-REM-01	IntelliSense™ SoloSense™ remote control, powered by (2) CR2032 batteries

Contractor Friendly INSTALLATION

Looking for a lighting solution that's both high-quality, and designed for easy installation and maintenance? ESL Vision Wall Packs feature user-friendly mounting options, convenient ports for optional factory-installed sensors, and an optional EMG integrated directly into the fixture. Why settle for less?


WALL PACK

FULL CUTOFF WALL PACK

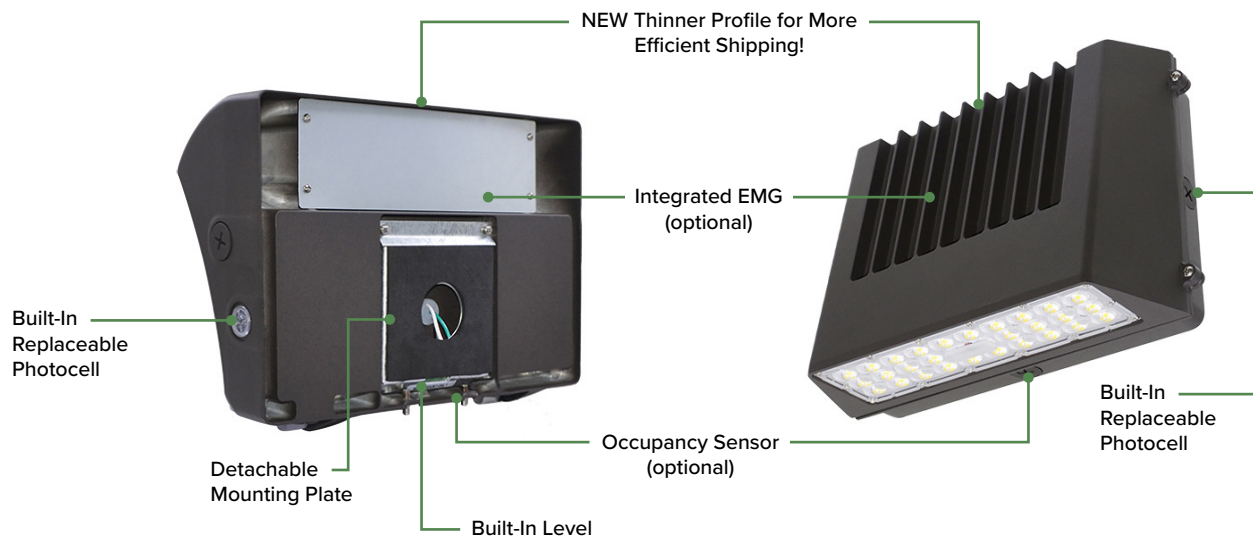

No Ordinary LED DISK

We've gone the extra mile to provide unmatched quality, incorporating details purposefully designed to enhance long-term performance and ensure a seamless and hassle-free installation.

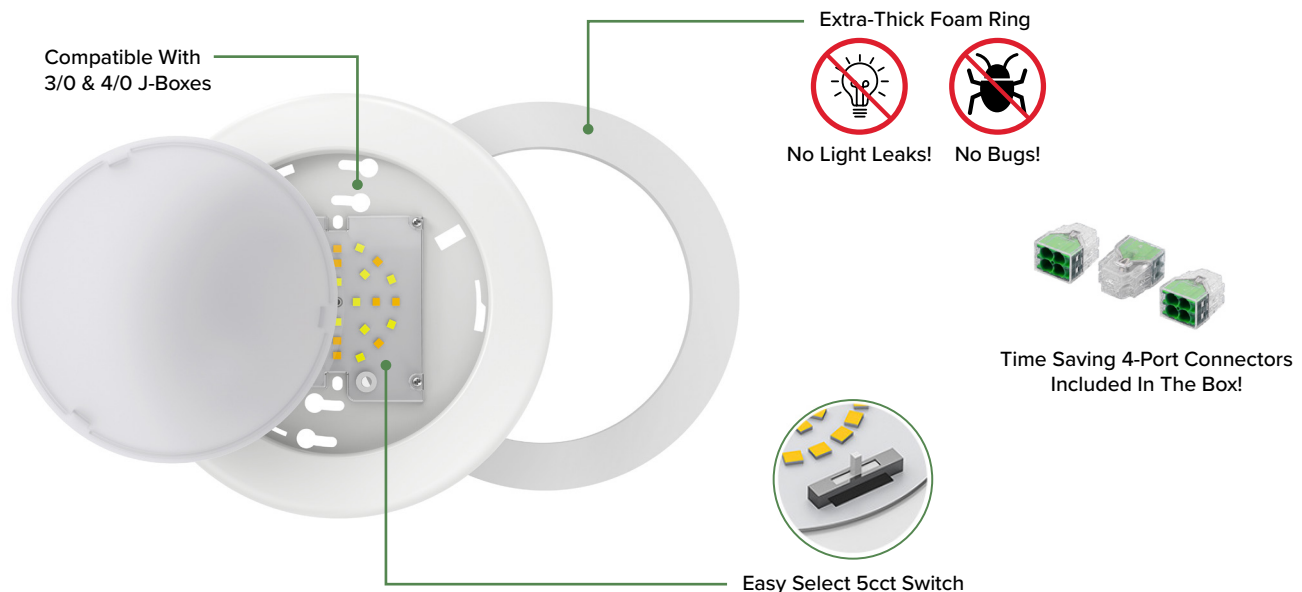

LAMPS

ITEM#	WATTAGE	KELVIN	BASE / SIZE
GENERAL LAMPS			
ESL-A21-3-16W-227	16W	2700K	E26 / A21
ESL-A21-3-16W-230	16W	3000K	E26 / A21
ESL-B13-6.5W-130	6.5W	3000K	E26 / B13
ESL-BR20-7W-327	7W	2700K	E26 / B20
ESL-BR20-7W-330	7W	3000K	E26 / B20
ESL-BR20-7W-340	7W	4000K	E26 / B20
ESL-PAR20-7W-32740	7W	2700K	E26 / PAR20
ESL-PAR20-7W-33040	7W	3000K	E26 / PAR20
ESL-PAR30-13W-14040	13W	4000K	E26 / PAR30
ESL-PAR30-13W-14040-277	13W	4000K	E26 / PAR30
ESL-PAR38-17W-12740-277	17W	2700K	E26 / PAR38
ESL-PAR38-17W-22740	17W	2700K	E26 / PAR38

CL LAMPS

ESL-CL-12W-430S-M	12W	3000K	E26
ESL-CL-12W-440EX39	12W	4000K	EX39
ESL-CL-12W-450EX39	12W	5000K	EX39
ESL-CL-18W-440EX39	18W	4000K	EX39
ESL-CL-18W-450S-M	18W	5000K	E26
ESL-CL-18W-450EX39	18W	5000K	EX39
ESL-CL-28W-430EX39	28W	3000K	EX39
ESL-CL-28W-450EX39	28W	5000K	EX39
ESL-CL-36W-430EX39	36W	3000K	EX39
ESL-CL-36W-430S-M	36W	3000K	E26
ESL-CL-36W-440EX39	36W	4000K	EX39
ESL-CL-46W-430EX39	46W	3000K	EX39
ESL-CL-46W-430S-M	46W	3000K	E26
ESL-CL-46W-440EX39	46W	4000K	EX39
ESL-CL-46W-450EX39	46W	5000K	EX39
ESL-CL-55W-430EX39	55W	3000K	EX39
ESL-CL-55W-430S-M	55W	3000K	E26
ESL-CL-55W-440EX39	55W	4000K	EX39
ESL-CL-55W-450S-M	55W	5000K	E26
ESL-CL-80W-430EX39	80W	3000K	EX39

PL LAMPS

ESL-NP-PL-6W-G23-40	6W	4000K	G23
ESL-NP-PL-6W-GX23-40	6W	4000K	GX23
ESL-PL-6W-30-GX23	6W	3000K	GX23
ESL-PL-7W-30-G24D	7W	3000K	G24D
ESL-PL-7W-30-G24Q	7W	3000K	G24Q
ESL-PL-7W-40-G24D	7W	4000K	G24D
ESL-PL-9W-30-G24D	9W	3000K	G24D
ESL-PL-9W-50-G24D	9W	5000K	G24D
ESL-PL-11W-30-G24D	11W	3000K	G24D
ESL-PL-11W-40-G24D	11W	4000K	G24D
ESL-PL-11W-50-G24D	11W	5000K	G24D
ESL-VPL-14W-230-G24D	14W	3000K	G24D
ESL-VPL-14W-240-G24D	14W	4000K	G24D
ESL-VPL-14W-250-G24D	14W	5000K	G24D
ESL-VPL-8W-240-G24D	8W	4000K	G24D
ESL-VPL-8W-250-G24D	8W	5000K	G24D
ESL-VPL-8W-250-G24Q	8W	5000K	G24Q

T8 LAMPS

ESL-T8-GDT-15W-F135	15W	3500K	G13 / 4-FT
ESL-T8-GDT-18W-F335	18W	3500K	G13 / 4-FT
ESL-T8-GDT2-9W-F235	9W	3500K	G13 / 2-FT
ESL-T8-GLV-12W-F235	12W	3500K	G13 / 4-FT
ESL-T8-GLV-12W-F250	12W	5000K	G13 / 4-FT
ESL-T8-GLV-12W-F330	12W	3000K	G13 / 4-FT
ESL-T8-GLV-12W-F350	12W	5000K	G13 / 4-FT
ESL-T8-GLV-18W-F240	18W	4000K	G13 / 4-FT
ESL-T8-GLV-18W-F330	18W	3000K	G13 / 4-FT
ESL-T8-GLV-18W-F335	18W	3500K	G13 / 4-FT
ESL-T8-GLV-18W-F340	18W	4000K	G13 / 4-FT
ESL-T8-GLV-18W-F350	18W	5000K	G13 / 4-FT
ESL-T8-GLV2-10W-F150	10W	5000K	G13 / 2-FT
ESL-T8-GLV2-9W-F235	9W	3500K	G13 / 2-FT
ESL-NP-T8-8-40W-F50	40W	5000K	FA8 / 8-FT

BASE ADAPTERS

ESL-E11-E26	E11 to E26
ESL-E26E12	E25 to E12
ESL-E39E26	E39 to E26
ESL-G23E26	G23 to E26
ESL-G24D-E26	G24D to E26

RETROFITS

ITEM#	WATTAGE	KELVIN	INPUT VOLTAGE
MULTI-USE RETROFIT (MUR)			
ESL-MUR-AMBER-75120-36V	75W-105W-120W	590nm	120-277 VAC
ESL-MUR-AMBER-150200-36V	150W-200W	590nm	120-277 VAC
ESL-MUR-AMBER-280350-24V	280W-350W	590nm	120-277 VAC

DOWNLIGHTS

ITEM#	WATTAGE	KELVIN	INPUT VOLTAGE
COMMERCIAL CAN RETROFIT (CCR)			
ESL-CCR-R4-10W-140-277	10W	4000K	277 VAC
ESL-CCR-R4-10W-150-277	10W	5000K	277 VAC
ESL-CCR-R56-10W-135	10W	3500K	120-277 VAC
ESL-CCR-R56-10W-150	10W	5000K	120-277 VAC
ESL-CCR-S4-10W-130	10W	3000K	120-277 VAC
ESL-CCR-S4-10W-140	10W	4000K	120-277 VAC
ESL-CCR-S4-10W-150	10W	5000K	120-277 VAC
ESL-CCR-S56-10W-130	10W	3000K	120-277 VAC
ESL-CCR-S56-10W-140	10W	4000K	120-277 VAC
ESL-CCR-S56-10W-150	10W	5000K	120-277 VAC
ESL-CCR-S56-15W-130	15W	3000K	120-277 VAC
ESL-CCR-S56-15W-130-277	15W	3000K	277 VAC

DISK

ESL-DSK-4-13W-227	13W	2700K	120-277 VAC
ESL-DSK-4-13W-230	13W	3000K	120-277 VAC
ESL-DSK-6-15W-227	15W	2700K	120-277 VAC
ESL-DSK-4-10W-327-WH	10W	2700K	120-277 VAC
ESL-DSK-4-10W-330-WH	10W	3000K	120-277 VAC
ESL-DSK-4-10W-340-WH	10W	4000K	120-277 VAC
ESL-DSK-6-15W-327-WH	15W	2700K	120-277 VAC
ESL-DSK-6-15W-330-WH	15W	3000K	120-277 VAC
ESL-DSK-6-15W-340-WH	15W	4000K	120-277 VAC
ESL-DSK-4-10W-330-BZ	10W	3000K	120-277 VAC
ESL-DSK-6-15W-330-BZ	15W	3000K	120-277 VAC

DECORATIVE DISK (DDSK)

ESL-DDSK-R5-10W-130-WH	10W	3000K	120-277 VAC
ESL-DDSK-R7-15W-130-WH	15W	3000K	120-277 VAC
ESL-DDSK-R9-20W-130-WH	20W	3000K	120-277 VAC

INDOOR FIXTURES

ITEM#	WATTAGE	KELVIN	INPUT VOLTAGE
VAPOR TIGHT			
ESL-VP4-25W-150	25W	5000K	120-277 VAC
DECORATIVE STRIP			
ESL-CSS-800-2-20W-3050K	20W	30K-40K-50K	120-277 VAC
ESL-CSS-800-8-3369W-3050K	33W-50W-69W	30K-40K-50K	120-277 VAC
LINEAR HIGH BAY (LHB)			
ESL-LHB-2-65W-340	65W	4000K	120-277 VAC
ESL-LHB-2-65W-350	65W	5000K	120-277 VAC
ESL-LHB-2-105W-340	105W	4000K	120-277 VAC
ESL-LHB-2-105W-350	105W	5000K	120-277 VAC
ESL-LHB-2-210W-340	210W	4000K	120-277 VAC
ESL-LHB-4-300W-340	300W	4000K	120-277 VAC

OUTDOOR FIXTURES

ITEM#	WATTAGE	KELVIN	INPUT VOLTAGE
MINI FLOOD LIGHT (MFL)			
ESL-MFL-15W-140-TM	15W	4000K	120-277 VAC
CANOPY			
ESL-NP-CP-60W-40-BZ-HV	60W	4000K	120-277 VAC
DOUBLE-HEAD SECURITY LIGHT			
ESL-NP-SF-DBN-5	20W	5000K	120-277 VAC

NOVA — BUILD-AN-AREA LIGHT! PICK A BODY, PICK A WATTAGE, PICK A MOUNT

ESL-AL-S-yyW-240-BZmm-T4		4000K	120-277 VAC
ESL-AL-S-yyW-240-BKmm-T4	75W	4000K	120-277 VAC
ESL-AL-S-yyW-240-WHmm-T4	110W	4000K	120-277 VAC
ESL-AL-S-yyW-240-GRmm-T4	150W	4000K	120-277 VAC

mm = Mounting Options: Fixed Direct Arm Mount (FDM), Direct Arm Mount (DM), Slip Fitter (SF), Yoke Mount (YM)

CAL HIGH VOLTAGE — BUILD-AN-AREA LIGHT! ADD ANY MOUNT!

ESL-CAL-80185W-140-HV-WH-T3	80W-120W-150W-185W	4000K	277-480 VAC
ESL-CAL-80185W-150-HV-WH-T3	80W-120W-150W-185W	5000K	277-480 VAC
ESL-CAL-200350W-150-HV-WH-T3	200W-240W-280W-350W	5000K	277-480 VAC

Mounting Options: Fixed Direct Arm Mount (FDM), Direct Arm Mount (DM), Slip Fitter (SF), Yoke Mount (YM)

*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2024 ESL Vision, LLC. All rights reserved. Rev: 08/14/2024



888.493.5559



info@eslvision.com



www.eslvision.com



WWW.ESLVISION.COM
888.493.5559

Headquarters
1957 S 4800 W
Salt Lake City, UT, USA

Atlanta
6371 Corley Road
Norcross, GA, USA