

Key Features & Benefits:

- Wattage Selectable
- Kelvin Selectable
- Comes Standard with Multiple Mounting Options in the Box
- Integrated Photocell That Can be Turned On or Off as Needed
- Optional Factory Fixed Wattage
- Bronze or White Finishes
- Durable Die-Cast Housing

Product Specifications:

Selectable Wattage: 50W—70W—90W
 Selectable Kelvin: 3000K—4000K—5000K
 Lumen Output at 5000K:
 50W—7,337 Lumens
 70W—9,679 Lumens
 90W—11,473 Lumens
 Efficacy: Up to 148 lm/W
 CRI: >80
 Power Frequency: 50/60Hz
 Input Voltage: 120–277 VAC
 Warranty: 5 Year Warranty
 Product Weight:
 1535W — 4.54 lbs
 5090W — 6.88 lbs
 105150W — 14.26 lbs

Project: _____

Date: _____

Catalog #: _____

Notes: _____



Available in Bronze or White Finishes



BOTH Knuckle and Yoke Mount Included!
 Comes Standard with Knuckle Installed



Ordering Guide:

ESL	-	TYPE	-	SELECTABLE WATTAGE	-	GENERATION	-	SELECTABLE KELVIN	-	FINISH
ESL	-	FLD	-	(yy)	-	1	-	3050	-	(ff)
		(FLD) Flood Light		(1535W) 15W, 25W, 35W (5090W) 50W, 70W, 90W (105150W) 105W, 120W, 150W		(1) 1st Generation		(3050) 3000K, 4000K, 5000K		(BZ) Bronze (WH) White

FIELD INSTALLED ACCESSORIES

ESL-FL1-S-WG	Wire Guard for 1535W Flood Light
ESL-FL1-M-WG	Wire Guard for 5090W Flood Light
ESL-FL1-L-WG	Wire Guard for 90150W Flood Light
ESL-FL1-S-VSH	Vandal Shield for 1535W Flood Light
ESL-FL1-M-VSH	Vandal Shield for 5090W Flood Light
ESL-FL1-L-VSH	Vandal Shield for 105150W Flood Light
ESL-ACCS-PC-003	Photocell for FLD Flood Light

Catalog Data:


ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	LUMENS	EFFICACY (lm/W)	FINISH (ff)	MOUNTING	DIMENSIONS	DLC QPL CODE
ESL-FLD-1535W-13050-ff	15W	3000K	2,064	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	7.0" x 3.0" x 5.0"	S-HS5G97
		4000K	2,224	148				
		5000K	2,186	146				
	25W	3000K	3,258	130				
		4000K	3,480	139				
		5000K	3,379	135				
	35W	3000K	4,503	129				
		4000K	4,796	137				
		5000K	4,772	136				
ESL-FLD-5090W-13050-ff	50W	3000K	6,909	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	10.5" x 3.25" x 7.0"	S-6A5JX3
		4000K	7,415	148				
		5000K	7,337	147				
	70W	3000K	9,085	130				
		4000K	9,777	140				
		5000K	9,679	138				
	90W	3000K	10,967	122				
		4000K	11,896	132				
		5000K	11,473	127				
ESL-FLD-105150W-13050-ff	105W	3000K	14,099	134	(BZ) Bronze (WH) White	Slip Fitter & Yoke	14.0" x 3.25" x 9.0"	S-EGJSRO
		4000K	15,148	144				
		5000K	14,837	141				
	120W	3000K	15,591	130				
		4000K	16,590	138				
		5000K	16,027	134				
	150W	3000K	19,557	130				
		4000K	20,793	139				
		5000K	20,154	134				




Dimensions:

1535W

Knuckle Mount

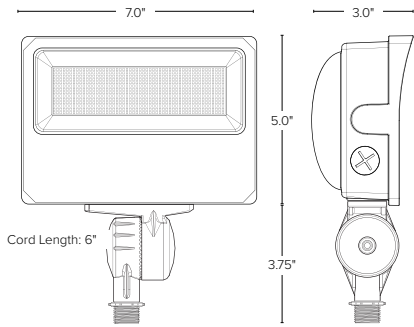


Yoke Mount

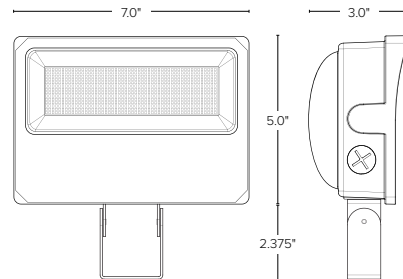


5090W

Knuckle Mount

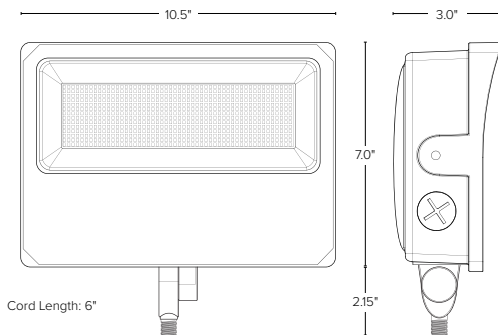


Yoke Mount

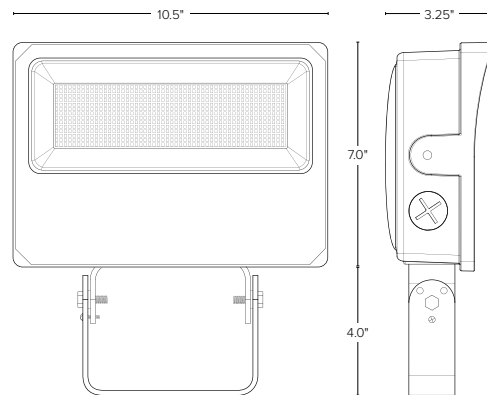

105150W

Slip Fitter

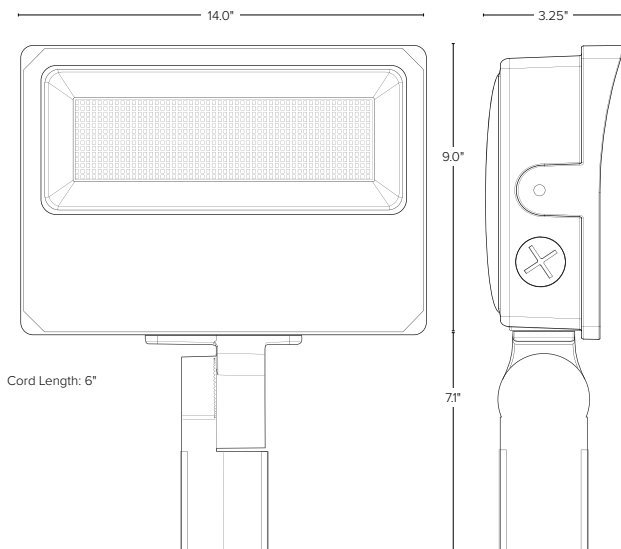

Yoke Mount

