


800 SERIES

Strip Installation Guide


WARNING

- 1. To avoid electric shock, disconnect power at source prior to installation.
- 2. The installation should be performed by qualified electricians or lighting technicians.
- 3. Before conducting any installation, maintenance, or removal, disable all power.
- 4. Do not touch the fixture while it is in service.
- 5. If there is any problem with the fixture, turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

2ft & 4ft Strip Installation



Detach the LED assembly by starting at one end of the fixture and pressing each side of the base.




Disconnect the LED wires and set \angle the LED assembly aside until the base is mounted and wired.



Remove the appropriate knockout and pull the supply wires into the housing. Install base to the mounting surface using the two keyholes shown.




4 With the fixture base installed, wire the LED driver to the power supply according to Wiring Diagram 1.



5 Reconnect ... the LED assembly. Reconnect the LED wires to




Reattach the LED assembly to the fixture base. The assembly should "click" into place.



Turn on the power supply and make sure the fixture works properly.

Wiring Diagram 1 —

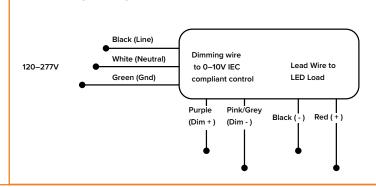





800 SERIES

Strip Installation Guide


8ft Strip Installation




Detach the LED assembly by starting at one end of the fixture and pressing each side of the base.



 $2^{
m Detach}$ the LED assembly by starting at one end of the fixture and pressing each side of the base.




3 Disconnect the LED wires and set the LED assembly aside until the base is mounted and wired.



4 Insert the connecting bracket on the open side of the luminaire.




 $5^{\hbox{Connect the two fixture bases}}_{\hbox{together using the connector}}$ bracket as shown.



Remove the appropriate knockout and 6 pull the supply wires into the housing. Install the fixture base to the mounting surface using the keyhole slots.



With the fixture base installed, wire the LED driver to the power supply according to Wiring Diagram 1.



Reconnect the LED wires to the LED assembly.



 $9^{\scriptsize{\mbox{Reattach}}}$ the LED assembly to the fixture base. The assembly should "click" into place.



Turn on the power supply and make Sure the fixture works properly.