
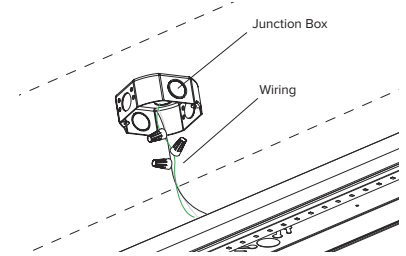
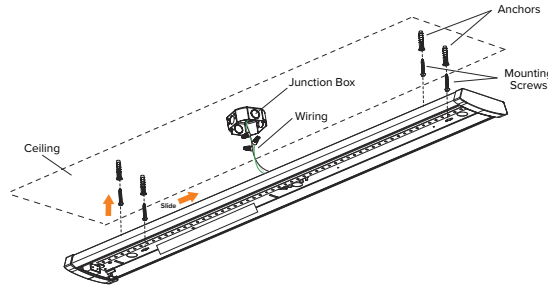


WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and **DO NOT** attempt repair unless you are a qualified technician or the customer service member.


Surface Mounting

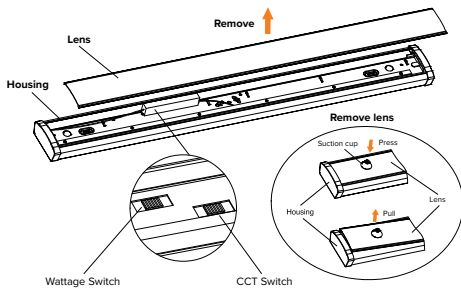

1 Remove the lens from the fixture by using the provided suction cups to pull the lens from the fixture housing. Adjust kelvin and wattage as desired using the dip switches located on the driver.

2 Use the fixture as a template by placing it on the junction box and marking the anchor locations. Put the fixture aside and drill the four holes. Insert an anchor (not included) into each hole. Insert a screw (not included) 3/4 of the way into each anchor.

3 Hang the fixture body onto the four screws. Connect the AC wires. (See Wiring Diagram below). Secure the body by tightening each screw.

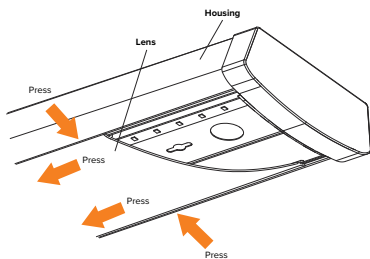

4 Install the lens starting at one end of housing. Insert the lens into the slot on one side of the housing. Carefully bow the lens into curve to slide the opposite edge into the slot. Continue this action down length of the lens until it is fully installed onto housing.

Wiring Diagram

