

Key Features & Benefits:

- Type A/B, Works With or Without Electronic Ballast
- Rugged Aluminum Construction
- Integral Driver (Isolated)

Product Specifications:


Wattage: 15 Watts
 Kelvin: 5000K
 Lumens: Up to 2,359
 Efficacy: Up to 156 lm/W
 Input Voltage: 120–277 VAC
 Power Factor: >0.9
 CRI: >80
 Base Type: G13
 Operating Temperature: -4°F to 113°F (-20°C to 45°C)
 L70 Lifetime 50,000 Hours calculated per TM21
 Dimensions (ØxL): 1.1" x 47.16"
 Weight (lbs): 0.46 Pounds

Project: _____

Date: _____

Catalog #: _____


Notes: _____




ITEM#	KELVIN	DLC QPL CODE
ESL-T8BC2-8W-C250	5000K	S-8E9T6J
ESL-T8BC4-15W-C250	5000K	S-L2XVG3

T8BC Wire Diagrams (Type AB):

Before Upgrade:

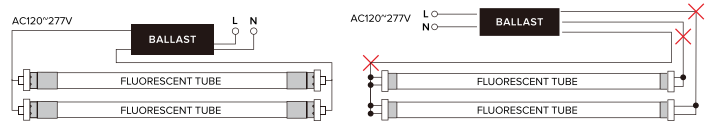

After Upgrade:

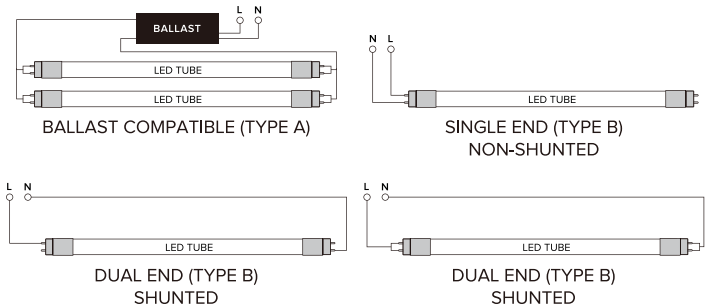

Ordering Guide:

ESL	TUBE	TYPE	SIZE	WATTAGE	LENS	GENERATION	KELVIN
ESL	T8	BC	4	15W	C	2	50
	(T8) Tube	(BC) Ballast Compatible	(4) 4 Foot	(15W) 15 Watts	(C) Clear	(2) 2nd Generation	(50) 5000K

Catalog Data:

ITEM#	KELVIN	LINE VOLTAGE			0.78 BALLAST FACTOR			0.88 BALLAST FACTOR			1.18 BALLAST FACTOR			
		VOLTAGE	WATTS	LUMEN OUTPUT (lm/W)	WATTS	LUMEN OUTPUT (lm/W)	WATTS	LUMEN OUTPUT (lm/W)	WATTS	LUMEN OUTPUT (lm/W)	WATTS	LUMEN OUTPUT (lm/W)		
ESL-T8BC2-8W-C250	5000K	120V	8	1,291	157	9	1088	119	12	1490	120	18	1992	108
		277V	9	1,331	156	9	1099	118	13	1560	124	18	2039	111
ESL-T8BC4-15W-C250	5000K	120V	15	2,330	155	15	2012	130	18	2368	130	27	3206	119
		277V	15	2,359	156	15	2141	139	18	2510	138	26	3316	126

*For a complete list of compatible ballasts, refer to our Ballast Compatibility Guide

*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Copyright © 2023 ESL Vision, LLC. All rights reserved. Rev: 05/01/23