



VAPOR TIGHT SERIES

The latest Vapor Tight in ESL Vision's lineup is the most versatile yet! Available in 3 sizes: 2, 4 and 8 foot. They are all wattage and kelvin selectable and feature durable, tamper-resistant stainless steel hardware. The hinged lens assembly allows for easy maintenance and installation.

HIGH QUALITY CONSTRUCTION BUILT FOR DURABILITY

5VA Housing, the Highest Classification in the UL94 Standard



WATTAGE AND KELVIN SELECTABLE

TAMPER RESISTANT STAINLESS STEEL HARDWARE



DAMP LOCATION RATED, DUST AND WATER RESISTANT


- Rated UL Wet Location, IP65
- High-Temperature Silicon Perimeter Gasket

IMPACT RESISTANT POLYCARBONATE LENS



VAPOR TIGHT — INSTALLATION MADE EASY

The hinged design and the integrated driver/lens makes single-person installation a breeze!
Designed for easy field or factory installed occupancy sensors and emergency back up.

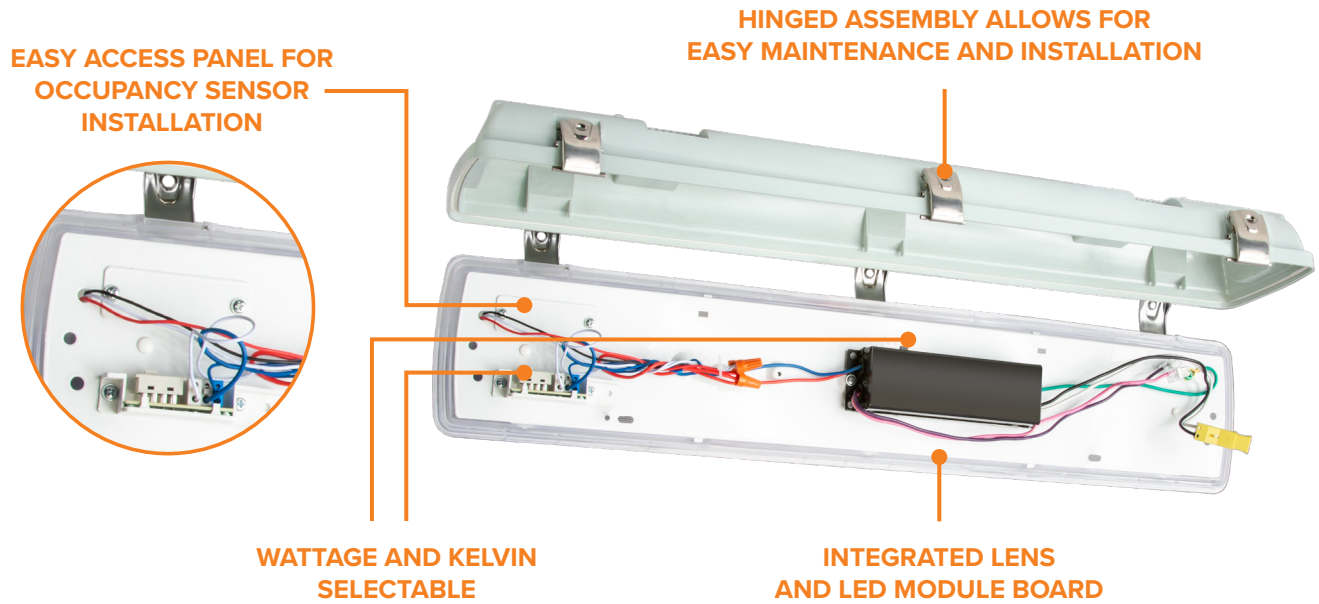

FEATURES AND BENEFITS

- Integrated lens and LED module board
- 5VA housing, the highest classification in the UL94 Standard
- Optional occupancy sensor and emergency back-up available
- Faster installation with integrated LED and lens
- Field selectable wattage and kelvin
 - 2 foot—20W/25W/30W, Up to 3,900 lumens
 - 4 foot—38W/46W/54W, Up to 7,000 lumens
 - 8 foot—65W/75W/90W, Up to 11,700 lumens

