

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Low Profile Design
- 0–10V Continuous Dimming

Project: _____

Date: _____


Catalog #: _____

Notes: _____

Product Specifications:



Selectable Wattage: 32W–40W–48W
 Selectable Kelvin: 3500K–4000K–5000K
 Lumens: Up to 5,520
 Efficacy: Up to 115 lm/W
 Input Voltage: 120–277 VAC
 Input Frequency: 50/60 Hz
 Operating Temperature: -4°F to 122°F
 Dimming: 0–10V
 Power Factor: >0.9
 CRI: >80
 Warranty: 5 Years
 L70 Lifetime 100,000 Hours calculated per TM21
 Dimensions: 47.6" x 5.3" x 2.1"
 Weight: 4.41 lbs

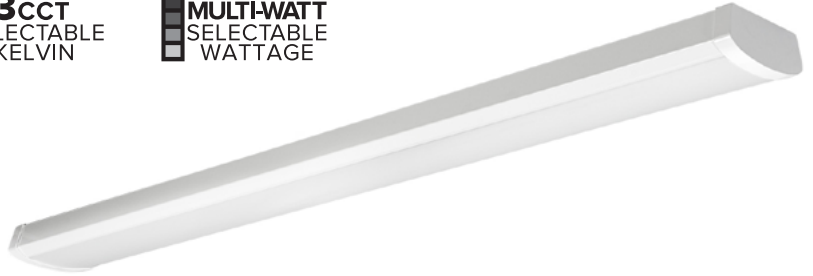

Ordering Guide:

ESL	FAMILY	TYPE	LENGTH	SELECTABLE WATTAGE	SELECTABLE KELVIN
ESL	CSS	810	4	3248W	3550K
	(CSS) Contractor Series Selectable	(810) Wrap	(4) 4 Foot	(3248W) 32W–40W–48W	(3550K) 3500K–4000K–5000K


Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	DLC QPL CODE
ESL-CSS-810-4-3248W-3550K	32W–40W–48W	3500K–4000K–5000K	5,520	115	120–277 VAC	S-1V17WH

Electrical Load — Standard Voltage:

SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC						
32	0.27	0.15	0.13	0.12	120–277 VAC	50/60 Hz	>0.9	<20%	-4°F to 122°F (-20°C to 50°C)	0–10V Dimming
40	0.33	0.19	0.17	0.14	120–277 VAC	50/60 Hz	>0.9	<20%	-4°F to 122°F (-20°C to 50°C)	0–10V Dimming
48	0.40	0.23	0.20	0.17	120–277 VAC	50/60 Hz	>0.9	<20%	-4°F to 122°F (-20°C to 50°C)	0–10V Dimming

Dimensions:

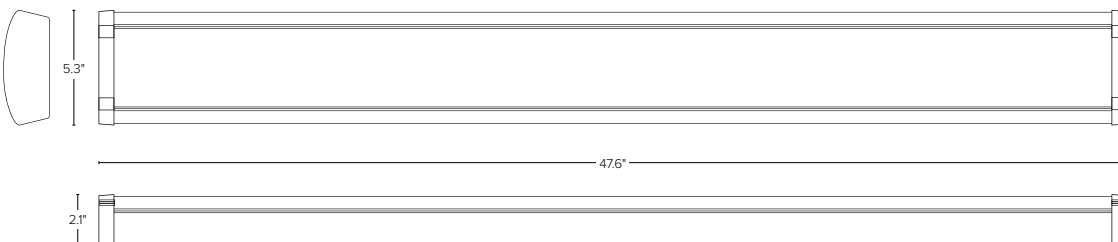

Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT	LUMEN MULTIPLIER
0 °C	1.02
10 °C	1.01
20 °C	1.00
25 °C	1.00
30 °C	1.00
40 °C	0.99
50 °C	0.96