

⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and **DO NOT** attempt repair unless you are a qualified technician or the customer service member.

Surface Mounting

1 Attach the baffle on the lamp if needed.

2 Detach the LED assembly by starting at one end of the fixture and pressing each side of the base.


3 Adjust kelvin and wattage as desired using the dip switches located on the driver.

4 Fix the lamp to the ceiling with plastic anchors and screws (not included)


5 Wire to main power through the junction box. (below)

6 Push lamp upward to snap into place.


Wiring Diagram

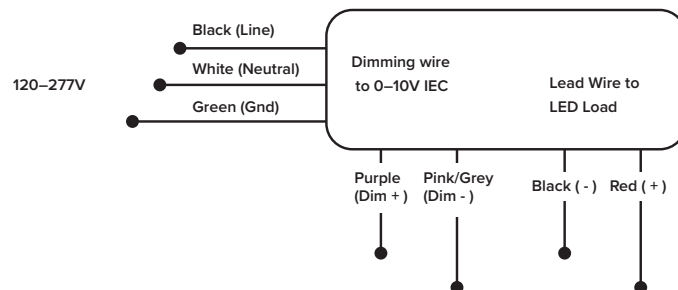


Chain Suspended Mounting

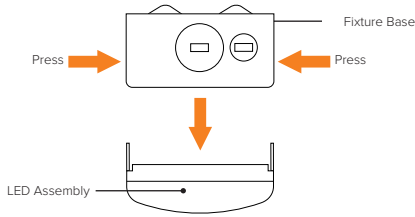


1 Detach the LED assembly by starting at one end of the fixture and pressing each side of the base.

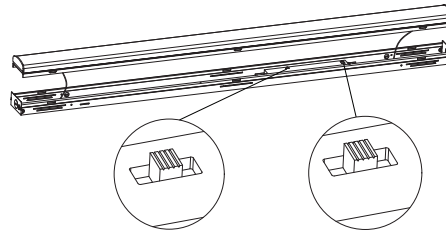


2 Adjust kelvin and wattage as desired using the dip switches located on the driver. Close LED assembly.



3 Connect the V-hooks to the lamp.

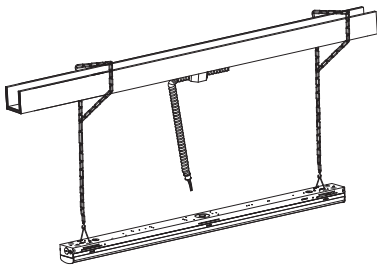


4 Attach chain to the V-hooks.

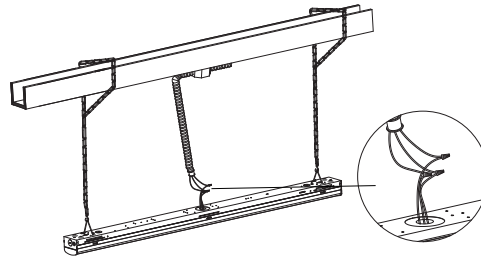


5 Connect the AC wires per wiring diagram. (Page 1)


Cable Suspended Mounting

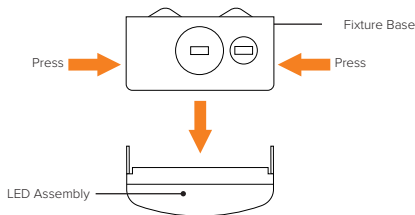


1 Detach the LED assembly by starting at one end of the fixture and pressing each side of the base.

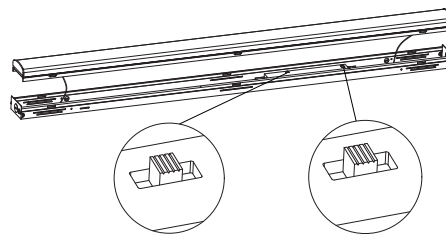


2 Adjust kelvin and wattage as desired using the dip switches located on the driver. Close LED assembly.

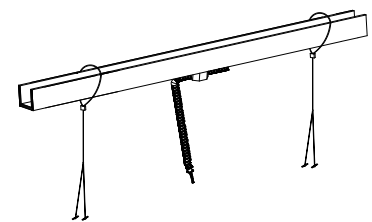

3 Connect cable to beam.



4 Attach fixture to the cable.

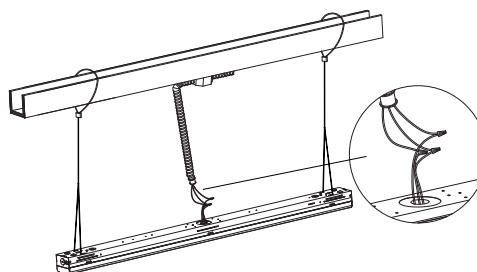

5 Connect the AC wires per wiring diagram. (Page 1)