

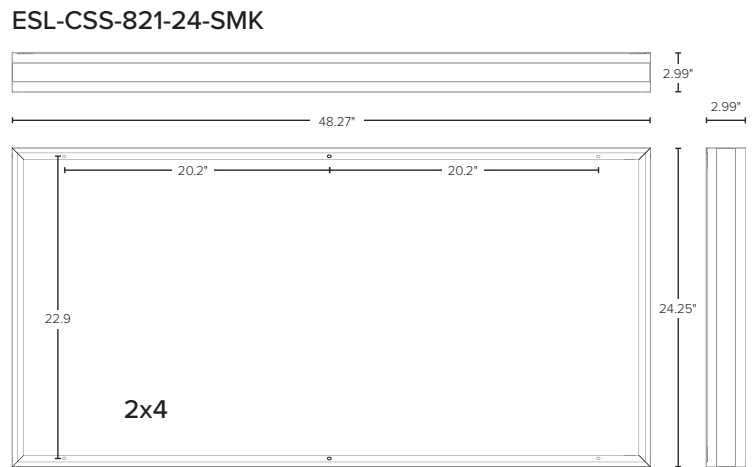
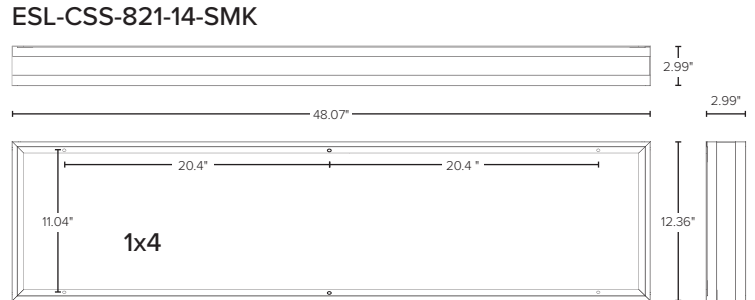



Dimensions

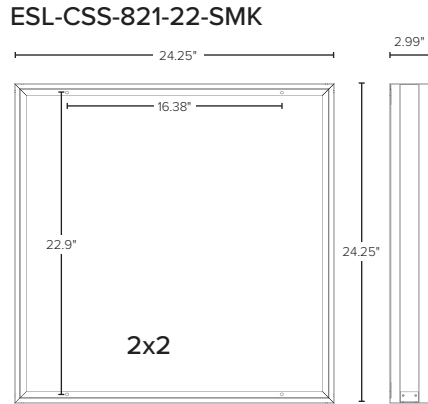


Installation

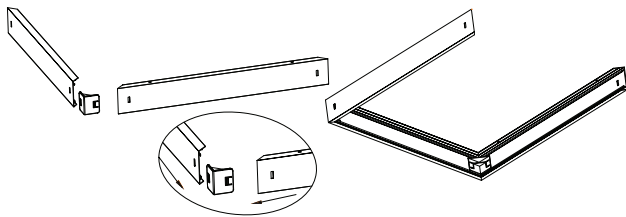


1 Assemble three of the four sides using provided plastic connectors.

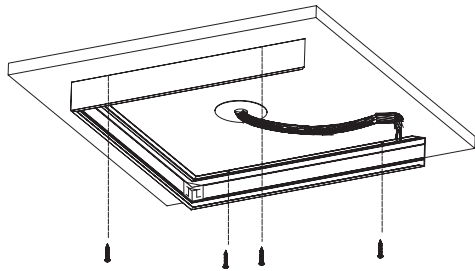


2 Fix the frame to the ceiling using fasteners appropriate for the mounting surface.

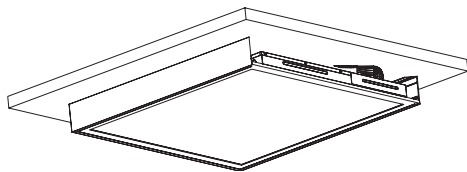

4 Slide the fixture completely into the frame, adjusting as needed to accommodate the conduit. The fixture should be seated level without any gaps. If it is not resting properly, push up on the fixture to re-seat it.

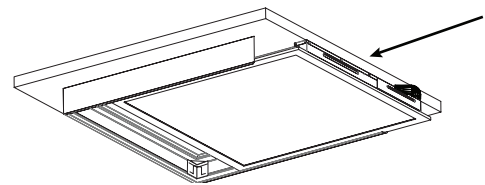

3 Partially slide the fixture into the frame channels allowing for space to wire the fixture.

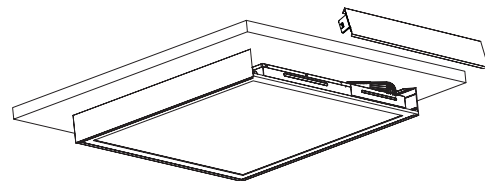

5 Attach two connectors to the fourth side of the frame and place it into the slots and lock into place.